


## RF WIDEBAND TRANSFORMERS


- 3KHz To 800MHz
- 12.5 To 800 Ohms
- Standard Industry Packaging
- Extensive Selection Of Standard Models
- Custom Designs Available

### Electrical Specifications @ 25°C


PART NUMBER (Insert Case Style) XFWB	Ratio	Frequency MHz	3dB MHz	Insertion Loss 2dB MHz	1dB MHz
0926-C_	1	.05-200	.05-200	.08-150	.2-80
1155-C_	1	.003-300	.003-300	.01-150	.02-50
3766-C_	2	.07-200	.07-200	.1-100	.5-50
1196-C_	2.5	.01-100	.01-100	.02-50	.05-20
0726-C_	3	.05-250	.05-250	.1-200	.5-70
0936-C_	4	.2-350	.2-350	.35-300	2-100
0946-C_	4	.02-250	.02-250	.05-150	.1-100
0956-C_	5	.3-300	.3-300	.6-200	.5-100
0736-C_	8	.03-140	.03-140	.1-90	1-60
0746-C_	13	.3-120	.3-120	.7-80	5-20
0966-C_	16	.03-75	.03-75	.06-30	.1-20
1155-D_	1	.004-500	.004-500	.02-200	.1-50
0756-D_	1.5	.075-500	.075-500	.2-100	1-50
1196-D_	2.5	.01-50	.01-50	.025-25	.050-10
0986-D_	4	.05-200	.05-200	.2-50	1-30
0976-D_	25	.02-30	.02-30	.05-20	.1-10
0926-A_	1	.15-400	.15-400	.35-200	2-50
1155-A_	1	.01-150	.01-150	.02-100	.05-50
0756-A_	1.5	.1-300	.1-300	.2-150	.5-80
0766-A_	1.5	.02-100	.02-100	.05-50	.1-25
1196-A_	2.5	.01-100	.01-100	.02-50	.05-20
0946-A_	4	.02-200	.02-200	.05-150	.1-100
0866-A_	9	.15-200	.15-200	.3-150	2-40
0966-A_	16	.3-120	.3-120	.7-80	5-20
0776-A_	36	.03-20	.03-20	.05-10	.1-5
0996-I_	1	.1-200	.1-200	.5-100	5-80
1006-I_	1	.01-10	.01-10	.02-5	.04-2

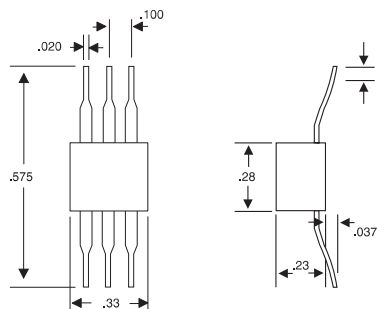


Package O




Package N

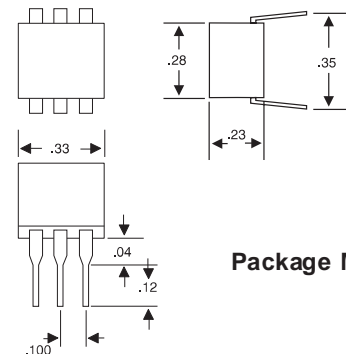


Package M




Schematic 'C'



Schematic 'D'



Schematic 'A'



Schematic 'I'