

# AN7002K, AN7002S


## Single Chip ICs for AM Radio

### Overview


The AN7002K and the AN7002S are the single chip ICs incorporating AM tuner block to power amp. block for 3V radio and are suitable for low-end AM radio.

### Features

- Single chip ICs incorporating AM tuner block to power amp. block
- Low power consumption : 17mA (at no signal)
- Built-in tuning indicator circuit
- Adjustment-free IF

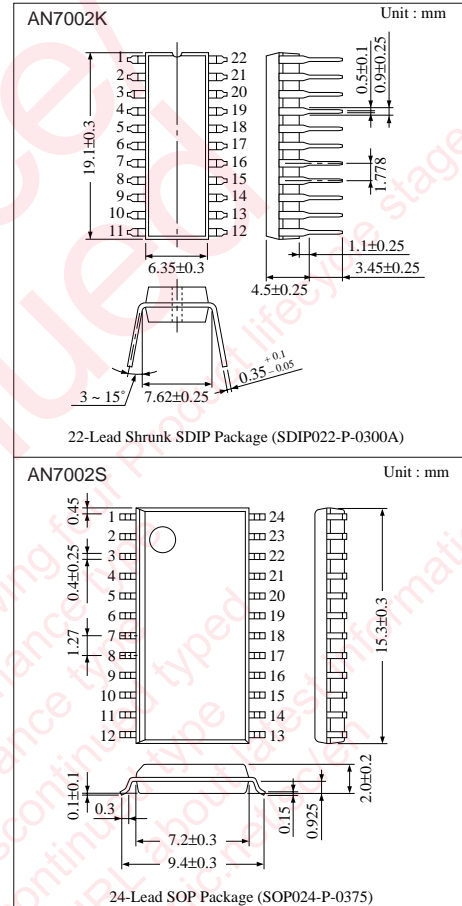

### Block Diagram

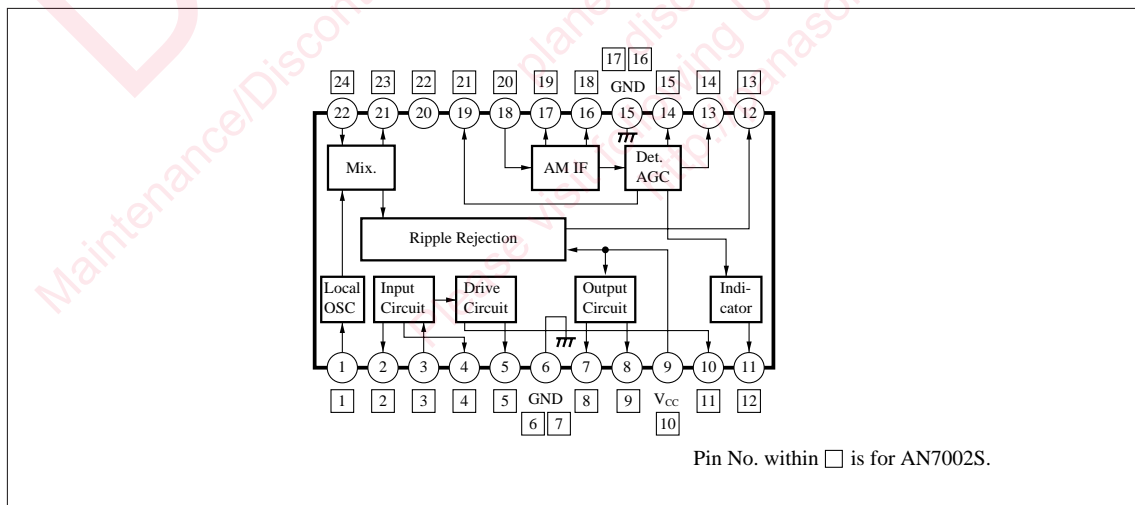

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Supply Voltage	AN7002K	V <sub>CC</sub>	6	V
	AN7002S			
Supply Current	I <sub>CC</sub>	300	mA	
Power Dissipation	AN7002K	P <sub>D</sub>	1980	mW
	AN7002S			
Operating Ambient Temperature	T <sub>opr</sub>	-20 ~ + 75	°C	
Storage Temperature	AN7002K	T <sub>stg</sub>	-55 ~ + 150	°C
	AN7002S			

■ Recommended Operating Range (Ta=25°C)


Parameter	Symbol	Range	
Operating Supply Voltage Range	AN7002K	V <sub>CC</sub>	1.8V ~ 6V
	AN7002S		1.8V ~ 4.5V

■ Electrical Characteristics


(V<sub>CC</sub> = 3V, [AM Section] R<sub>L</sub> = 5kΩ, f = 1MHz, Mod. = 30%, f<sub>M</sub> = 400Hz [Power Section] R<sub>L</sub> = 8Ω, f = 1kHz, Ta = 25°C)

Parameter	Symbol	Condition	min.	typ.	max.	Unit
Total Circuit Current	I <sub>tot</sub>	AM V <sub>in</sub> = -20dBμ, Power V <sub>in</sub> = 0mV	9	17	25	mA
AM Section (Power Section R <sub>g</sub> = 10kΩ)						
Detection Output Voltage	V <sub>O</sub>	V <sub>in</sub> = 60dBμ	16	24	32	mV <sub>rms</sub>
Sensitivity	S <sub>max.</sub>	V <sub>O</sub> = 5mV <sub>rms</sub>	-4	4.5	13	dBμ
Indicator Sensitivity	V <sub>IND</sub>	Pin11 = less than 1V	7	17	27	dBμ
Power Section (AM Section V <sub>in</sub> = -20dBμ)						
Voltage Gain	G <sub>V</sub>	V <sub>O</sub> = 0.28mV <sub>rms</sub>	41	44	47	dB
Output Noise Voltage	V <sub>NO</sub>	R <sub>g</sub> = 10kΩ, DIN/AUDIO	—	0.3	0.6	mV <sub>rms</sub>
Total Harmonic Distortion	THD	V <sub>O</sub> = 0.28mV <sub>rms</sub>	—	2.5	5	%
Maximum Output	P <sub>O</sub>	THD = 10%	100	120	—	mW

■ Characteristics Curve

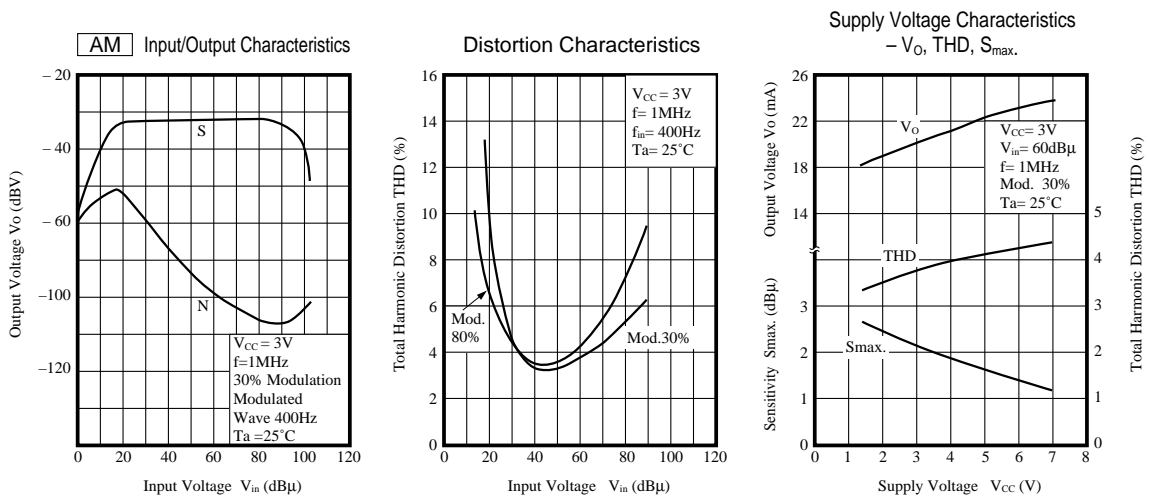

■ Application Circuit (AN7002K)

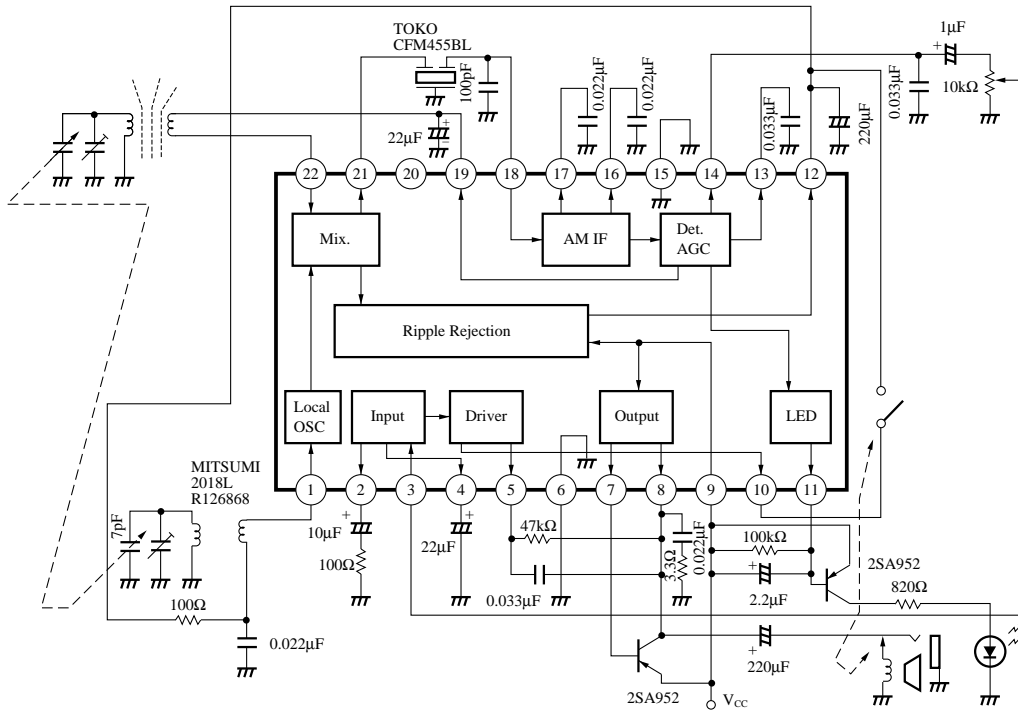

■ Pin Descriptions

Pin No. within □ is for AN7002S

Pin No.		Pin Name	Typ. Waveform	Description	Equivalent Circuit
AN7002K	AN7002S				
1	1	Local OSC	—	AMOSC pin Oscillation circuit is made up with differential amp.	
9	10	V <sub>CC</sub>	DC 3V	Supply pin	—
3	3	AF Input		Differential amp. base input	
4	4	Ripple Rejection	—	Ripple rejection pin	

## ■ Pin Descriptions (Cont.)

Pin No. within  is for AN7002S

Pin No.		Pin Name	Typ. Waveform	Description	Equivalent Circuit
AN7002K	AN7002S				
5	5	Phase Compensation	—	Phase compensation pin Connect phase compensation C, R between power output pin and this pin.	
6	6 7	GND	DC 0V	GND pin	—
7	8	PNP Power Base	—	PNP power transistor base connection pin	
8	9	Power Output		Power output pin	
2	2	Negative Feedback	—	Power amp. negative feedback pin	
10	11	Current Switching	—	Current switching pin Connect this pin with V <sub>CC</sub> and increase supply current quantity.	
11	12	Indicator	—	Indicator pin LED drive becomes open collector output used AGC voltage. Drive capacitance is 2mA. So LED can't be driven directly.	
12	13	Ripple Rejection	—	Ripple rejection pin Make up of π type filter at C, R and increase ripple rejection efficiency.	
13	14	Detection		Detection pin Input 455kHz IF signal to two Tr in reverse phase, peak detect all-rectified waveform through constant-current supply and C, R charge and discharge.	
14	15	Detection Output		Detection output pin This pin is PNP emitter ground amp. output. Output impedance is 2.2kΩ.	

■ Pin Descriptions (Cont.)

Pin No. within □ is for AN7002S

Pin No.		Pin Name	Typ. Waveform	Description	Equivalent Circuit
AN7002K	AN7002S				
15	16 17	GND	DC 0V	GND pin	—————
16	18	IF By-pass	455kHz IF Signal	IF by-pass capacitor connection pin	
17	19	IF By-pass	455kHz IF Signal	IF by-pass capacitor connection pin	
18	20	IF Input	455kHz IF Signal	IF input pin Differential amp. base input	
19	21	AGC	—	AGC pin Connect capacitor	
22	24	RF Input	AM Signal	RF input pin Differential amp. base input	
21	23	MIX Output	455kHz IF Signal	MIX output pin Connect ceramic filter	
20	22	NC	—	NC Pin	—————

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.