
# **DISCRETE SEMICONDUCTORS**

# DATA SHEET



# BC847BVN NPN/PNP general purpose transistor

Product specification Supersedes data of 2001 Aug 30 2001 Nov 07





# NPN/PNP general purpose transistor

# **BC847BVN**

### **FEATURES**

- 300 mW total power dissipation
- Very small 1.6 mm x 1.2 mm ultra thin package
- Excellent coplanarity due to straight leads
- Replaces two SC-75/SC-89 packaged transistors on same PCB area
- · Reduced required PCB area
- · Reduced pick and place costs.

### **APPLICATIONS**

- · General purpose switching and amplification
- Switch mode power supply complementary MOSFET driver
- · Complementary driver for audio amplifiers.

# **DESCRIPTION**


NPN/PNP transistor pair in a SOT666 plastic package.

### **MARKING**

TYPE NUMBER	MARKING CODE
BC847BVN	13

#### **PINNING**

PIN	DESCRIPTION		
1, 4	emitter	TR1; TR2	
2, 5	base	TR1; TR2	
6, 3	collector	TR1; TR2	

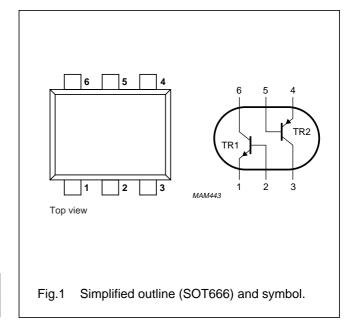

# LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT	
Per transis	Per transistor; for the PNP transistor with negative polarity					
V <sub>CBO</sub>	collector-base voltage	open emitter	_	50	V	
V <sub>CEO</sub>	collector-emitter voltage	open base	_	45	V	
V <sub>EBO</sub>	emitter-base voltage	open collector	_	5	V	
I <sub>C</sub>	collector current (DC)		_	100	mA	
I <sub>CM</sub>	peak collector current		_	200	mA	
I <sub>BM</sub>	peak base current		_	200	mA	
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C; note 1	_	200	mW	
T <sub>stg</sub>	storage temperature		-65	+150	°C	
Tj	junction temperature		_	150	°C	
T <sub>amb</sub>	operating ambient temperature		-65	+150	°C	
Per device	•					
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C; note 1	_	300	mW	

## Note

1. Transistor mounted on an FR4 printed-circuit board.

# NPN/PNP general purpose transistor

BC847BVN

# THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th j-a</sub>	thermal resistance from junction to ambient	notes 1 and 2	416	K/W

## **Notes**

- 1. Transistor mounted on an FR4 printed-circuit board.
- 2. The only recommended soldering is reflow soldering.

# **CHARACTERISTICS**

 $T_{amb}$  = 25 °C unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Per transis	stor; for the PNP transistor with	negative polarity		•		
I <sub>CBO</sub>	collector-base cut-off current	V <sub>CB</sub> = 30 V; I <sub>E</sub> = 0	_	_	15	nA
		V <sub>CB</sub> = 30 V; I <sub>E</sub> = 0; T <sub>j</sub> = 150 °C	_	_	5	μΑ
I <sub>EBO</sub>	emitter-base cut-off current	V <sub>EB</sub> = 5 V; I <sub>C</sub> = 0	_	_	100	nA
h <sub>FE</sub>	DC current gain	V <sub>CE</sub> = 5 V; I <sub>C</sub> = 2 mA	200	_	450	
V <sub>CEsat</sub>	collector-emitter saturation	I <sub>C</sub> = 10 mA; I <sub>B</sub> = 0.5 mA	_	_	100	mV
	voltage	I <sub>C</sub> = 100 mA; I <sub>B</sub> = 5 mA; note 1	_	_	300	mV
V <sub>BEsat</sub>	collector-emitter saturation voltage	I <sub>C</sub> = 10 mA; I <sub>B</sub> = 0.5 mA	_	755	_	mV
f <sub>T</sub>	transition frequency	I <sub>C</sub> = 10 mA; V <sub>CE</sub> = 5 V; f = 100 MHz	100	_	_	MHz
NPN trans	istor					
V <sub>BE</sub>	base-emitter turn-on voltage	V <sub>CE</sub> = 5 V; I <sub>C</sub> = 2 mA	580	655	700	mV
C <sub>c</sub>	collector capacitance	$V_{CB} = 10 \text{ V}; I_E = I_e = 0; f = 1MHz$	_	_	1.5	pF
C <sub>e</sub>	emitter capacitance	$V_{EB} = 500 \text{ mV}; I_C = I_c = 0; f = 1 \text{MHz}$	_	11	_	pF
PNP trans	istor			•		
V <sub>BE</sub>	base-emitter turn-on voltage	$V_{CE} = -5 \text{ V}; I_{C} = -2 \text{ mA}$	600	655	750	mV
C <sub>c</sub>	collector capacitance	$V_{CB} = -10 \text{ V}; I_C = I_c = 0; f = 1MHz$	_	-	2.2	pF
C <sub>e</sub>	emitter capacitance	$V_{EB} = -500 \text{ mV}; I_E = I_e = 0; f = 1MHz$	_	10	_	pF

# Note

1. Pulse test:  $t_p \le 300 \ \mu s; \ \delta \le 0.02.$ 

# NPN/PNP general purpose transistor


# BC847BVN



**TR1 (NPN)**;  $V_{CE} = 5 \text{ V}$ .

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .


Fig.2 DC current gain as a function of collector current: typical values.



**TR1 (NPN)**;  $V_{CE} = 5 \text{ V}$ .

- (1)  $T_{amb} = -55 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = 150 \, ^{\circ}C$ .


Fig.3 Base-emitter voltage as a function of collector current; typical values.



**TR1 (NPN)**;  $I_C/I_B = 20$ .

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.4 Collector-emitter saturation voltage as a function of collector current: typical values.



**TR1 (NPN)**;  $I_C/I_B = 20$ .

- (1)  $T_{amb} = -55 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = 150 \, ^{\circ}C$ .


4

Fig.5 Base-emitter saturation voltage as a function of collector current.

2001 Nov 07

# NPN/PNP general purpose transistor


# BC847BVN



**TR2 (PNP)**;  $V_{CE} = -5 \text{ V}$ .

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .


Fig.6 DC current gain as a function of collector current: typical values.



**TR2 (PNP)**;  $V_{CE} = -5 \text{ V}$ .

- (1)  $T_{amb} = -55 \,^{\circ}C$ .
- (2)  $T_{amb} = 25 \,^{\circ}C$ .
- (3)  $T_{amb} = 150 \, ^{\circ}C$ .


Fig.7 Base-emitter voltage as a function of collector current; typical values.



**TR2 (PNP)**;  $I_C/I_B = 20$ .

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.8 Collector-emitter saturation voltage as a function of collector current: typical values.



**TR2 (PNP)**;  $I_C/I_B = 20$ .

- (1)  $T_{amb} = -55 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .

5

(3)  $T_{amb} = 150 \, ^{\circ}C$ .

Fig.9 Base-emitter saturation voltage as a function of collector current.

2001 Nov 07


# NPN/PNP general purpose transistor

BC847BVN

# **PACKAGE OUTLINE**

Plastic surface mounted package; 6 leads

**SOT666** 

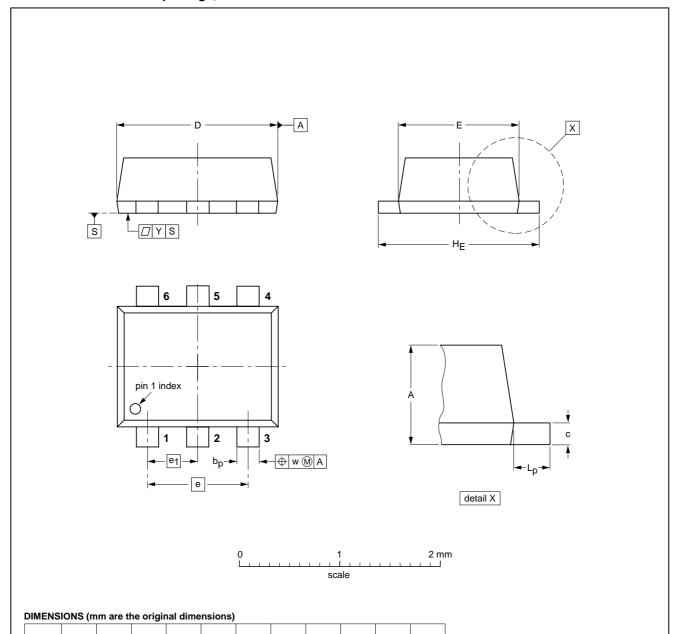

UNII	Α	bp	С	ט	E	е	e <sub>1</sub>	HE	Lp	w	У
mm	0.6 0.5	0.27 0.17	0.18 0.08	1.7 1.5	1.3 1.1	1.0	0.5	1.7 1.5	0.3 0.1	0.1	0.1

OUTLINE		REFERENCES			EUROPEAN ISSUE DATE			EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE			
SOT666						<del>-01-01-04</del> 01-08-27			

# NPN/PNP general purpose transistor

BC847BVN

#### **DATA SHEET STATUS**

DATA SHEET STATUS(1)	PRODUCT STATUS <sup>(2)</sup>	DEFINITIONS
Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
Preliminary data	Qualification	This data sheet contains data from the preliminary specification.  Supplementary data will be published at a later date. Philips  Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Changes will be communicated according to the Customer Product/Process Change Notification (CPCN) procedure SNW-SQ-650A.

#### **Notes**

- 1. Please consult the most recently issued data sheet before initiating or completing a design.
- 2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL http://www.semiconductors.philips.com.

# **DEFINITIONS**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

# **DISCLAIMERS**

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

# Philips Semiconductors – a worldwide company

#### **Contact information**

For additional information please visit http://www.semiconductors.philips.com. Fax: +31 40 27 24825 For sales offices addresses send e-mail to: sales.addresses@www.semiconductors.philips.com.

© Koninklijke Philips Electronics N.V. 2001

SCA73

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

613514/02/pp8

Date of release: 2001 Nov 07  $\,$ 

Document order number: 9397 750 09039

Let's make things better.

Philips Semiconductors



