

AN78xxNSP Series


3-pin positive output voltage regulator (1 A type)

■ Overview


The AN78xxNSP series is a 3-pin fixed positive output type monolithic voltage regulator housed in surface mounting package. Stabilized fixed output voltage is obtained from unstable DC input voltage with using minimum external components. 9 types of fixed output voltage are available; 5 V, 6 V, 7 V, 8 V, 9 V, 10 V, 12 V, 15 V and 18 V. They can be used widely in power circuits with current capacity up to 1 A.

■ Features

- Output voltage: 5V, 6V, 7V, 8V, 9V, 10V, 12V, 15V, 18V
- Built-in overcurrent limit circuit
- Built-in thermal overload protection circuit
- Built-in ASO (area of safe operation) protection circuit

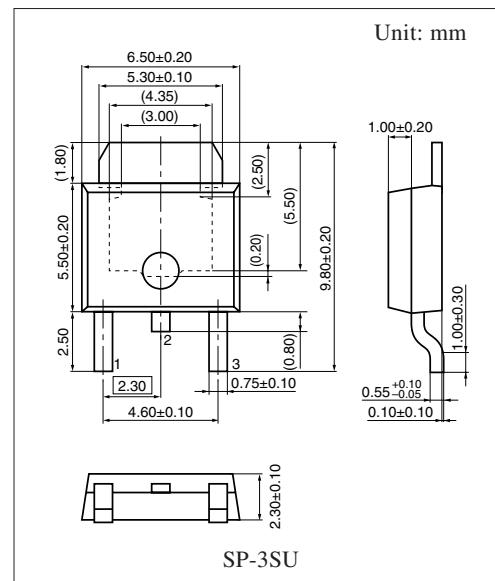

■ Block Diagram

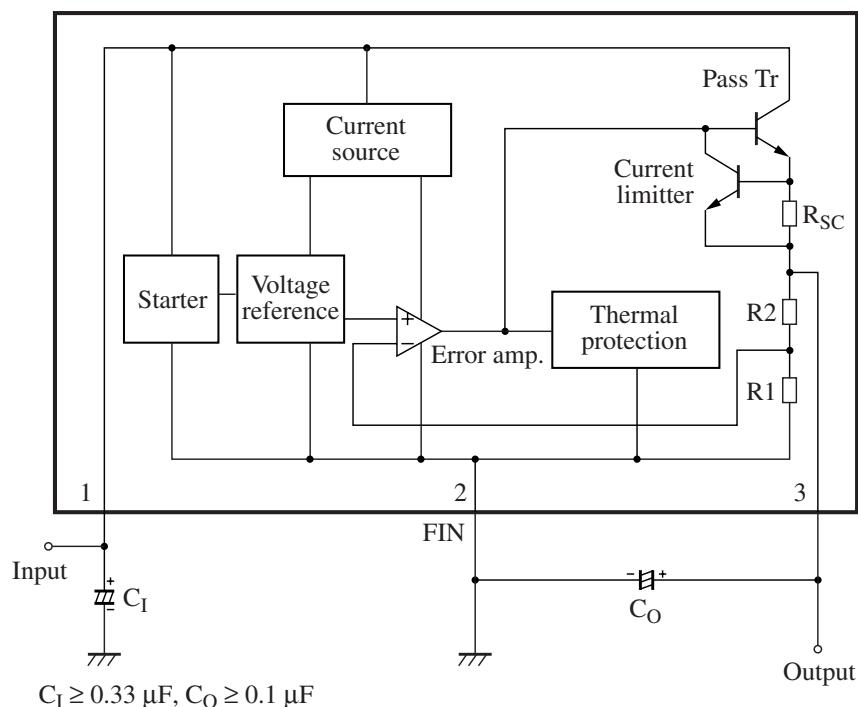

■ Pin Descriptions

Pin No.	Description	
1	Input	Input voltage pin
2	GND	Ground pin (FIN)
3	Output	Output voltage pin

■ Absolute Maximum Ratings

Parameter	Symbol	Range	Unit
Supply voltage	V _{CC}	35	V
Supply current	I _{CC}	—	mA
Power dissipation ^{*2}	P _D	364	mW
Operating ambient temperature ^{*1}	T _{opr}	-30 to +85	°C
Storage temperature ^{*1}	T _{stg}	-55 to +150	°C

Note) 1. *1: Except for the operating ambient temperature and storage temperature, all ratings are for T_a = 25°C.

*2: The power dissipation shown is the value for the independent IC without a heat sink at T_a = 85°C.

When T_j exceeds 150°C (designed value), the internal circuit cuts off the output.

2. This IC is not suitable for car electronics equipment.

■ Electrical Characteristics at T_a = 25°C

• AN7805NSP (5 V type)

The specified condition T_j = 25°C means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, V_I = 10 V, I_O = 500 mA, C_I = 0.33 μF and C_O = 0.1 μF

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V _{O1}	T _j = 25°C	4.8	5	5.2	V
Output voltage tolerance	V _{O2}	V _I = 8 V to 20 V, I _O = 5 mA to 1 A T _j = 25°C, P _D < 5 W	4.75	—	5.25	V
Line regulation 1	REG _{IN1}	V _I = 7.5 V to 25 V, T _j = 25°C	—	3	100	mV
Line regulation 2	REG _{IN2}	V _I = 8 V to 12 V, T _j = 25°C	—	1	50	mV
Load regulation 1	REG _{L1}	I _O = 5 mA to 1.5 A, T _j = 25°C	—	15	100	mV
Load regulation 2	REG _{L2}	I _O = 250 mA to 750 mA, T _j = 25°C	—	5.0	50	mV
Bias current	I _{Bias}	T _j = 25°C	—	3.9	8	mA
Bias current fluctuation to input	ΔI _{Bias(IN)}	V _I = 7.5 V to 25 V, T _j = 25°C	—	—	1.3	mA
Bias current fluctuation to load	ΔI _{Bias(L)}	I _O = 5 mA to 1 A, T _j = 25°C	—	—	0.5	mA
Ripple rejection ratio	RR	V _I = 8 V to 18 V, I _O = 100 mA, f = 120 Hz	62	—	—	dB

• Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V _{NO}	f = 10 Hz to 100 kHz	—	40	—	μV
Minimum input/output voltage difference	V _{DIF(min)}	I _O = 1 A, T _j = 25°C	—	2	—	V
Output short-circuit current	I _{O(Short)}	V _I = 35 V, T _j = 25°C	—	700	—	mA
Peak output current	I _{O(Peak)}	T _j = 25°C	—	2.0	—	A
Output voltage temperature coefficient	ΔV _O / T _a	I _O = 5 mA, T _j = 0°C to 125°C	—	-0.3	—	mV/°C
Thermal protection operating temperature	T _{j(TH)}	I _O = 5 mA	—	150	—	°C

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7806NSP (6 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 11 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	5.75	6	6.25	V
Output voltage tolerance	V_{O2}	$V_I = 9 \text{ V to } 21 \text{ V}$, $I_O = 5 \text{ mA to } 1 \text{ A}$ $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	5.7	—	6.3	V
Line regulation 1	REG_{IN1}	$V_I = 8.5 \text{ V to } 25 \text{ V}$, $T_j = 25^\circ\text{C}$	—	5	120	mV
Line regulation 2	REG_{IN2}	$V_I = 9 \text{ V to } 13 \text{ V}$, $T_j = 25^\circ\text{C}$	—	1.5	60	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA to } 1.5 \text{ A}$, $T_j = 25^\circ\text{C}$	—	14	120	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA to } 750 \text{ mA}$, $T_j = 25^\circ\text{C}$	—	4.0	60	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	3.9	8	mA
Bias current fluctuation to input	$\Delta I_{\text{Bias}(IN)}$	$V_I = 8.5 \text{ V to } 25 \text{ V}$, $T_j = 25^\circ\text{C}$	—	—	1.3	mA
Bias current fluctuation to load	$\Delta I_{\text{Bias}(L)}$	$I_O = 5 \text{ mA to } 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 9 \text{ V to } 19 \text{ V}$, $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	59	—	—	dB

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz to } 100 \text{ kHz}$	—	40	—	μV
Minimum input/output voltage difference	$V_{DIF(\min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
Output short-circuit current	$I_{O(\text{Short})}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(\text{Peak})}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C to } 125^\circ\text{C}$	—	-0.4	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(\text{TH})}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7807NSP (7 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 12 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	6.7	7	7.3	V
Output voltage tolerance	V_{O2}	$V_I = 10 \text{ V} \text{ to } 22 \text{ V}$, $I_O = 5 \text{ mA} \text{ to } 1 \text{ A}$ $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	6.6	—	7.4	V
Line regulation 1	REG_{IN1}	$V_I = 9.5 \text{ V} \text{ to } 25 \text{ V}$, $T_j = 25^\circ\text{C}$	—	5	140	mV
Line regulation 2	REG_{IN2}	$V_I = 10 \text{ V} \text{ to } 15 \text{ V}$, $T_j = 25^\circ\text{C}$	—	1.5	70	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA} \text{ to } 1.5 \text{ A}$, $T_j = 25^\circ\text{C}$	—	14	140	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA} \text{ to } 750 \text{ mA}$, $T_j = 25^\circ\text{C}$	—	4.0	70	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	3.9	8	mA
Bias current fluctuation to input	$\Delta I_{Bias(IN)}$	$V_I = 9.5 \text{ V} \text{ to } 25 \text{ V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
Bias current fluctuation to load	$\Delta I_{Bias(L)}$	$I_O = 5 \text{ mA} \text{ to } 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 10 \text{ V} \text{ to } 20 \text{ V}$, $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	57	—	—	dB

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz} \text{ to } 100 \text{ kHz}$	—	46	—	μV
Minimum input/output voltage difference	$V_{DIF(min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
Output short-circuit current	$I_{O(Short)}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(Peak)}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C} \text{ to } 125^\circ\text{C}$	—	-0.5	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(TH)}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7808NSP (8 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 14 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	7.7	8	8.3	V
Output voltage tolerance	V_{O2}	$V_I = 11 \text{ V to } 23 \text{ V}$, $I_O = 5 \text{ mA to } 1 \text{ A}$ $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	7.6	—	8.4	V
Line regulation 1	REG_{IN1}	$V_I = 10.5 \text{ V to } 25 \text{ V}$, $T_j = 25^\circ\text{C}$	—	6	160	mV
Line regulation 2	REG_{IN2}	$V_I = 11 \text{ V to } 17 \text{ V}$, $T_j = 25^\circ\text{C}$	—	2	80	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA to } 1.5 \text{ A}$, $T_j = 25^\circ\text{C}$	—	12	160	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA to } 750 \text{ mA}$, $T_j = 25^\circ\text{C}$	—	4.0	80	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	3.9	8	mA
Bias current fluctuation to input	$\Delta I_{Bias(IN)}$	$V_I = 10.5 \text{ V to } 25 \text{ V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
Bias current fluctuation to load	$\Delta I_{Bias(L)}$	$I_O = 5 \text{ mA to } 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 11.5 \text{ V to } 21.5 \text{ V}$, $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	56	—	—	dB

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz to } 100 \text{ kHz}$	—	52	—	μV
Minimum input/output voltage difference	$V_{DIF(min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
Output short-circuit current	$I_{O(Short)}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(Peak)}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C to } 125^\circ\text{C}$	—	-0.5	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(TH)}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7809NSP (9 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 15 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	8.65	9	9.35	V
Output voltage tolerance	V_{O2}	$V_I = 12 \text{ V}$ to 24 V , $I_O = 5 \text{ mA}$ to 1 A $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	8.55	—	9.45	V
Line regulation 1	REG_{IN1}	$V_I = 11.5 \text{ V}$ to 26 V , $T_j = 25^\circ\text{C}$	—	7	180	mV
Line regulation 2	REG_{IN2}	$V_I = 12 \text{ V}$ to 18 V , $T_j = 25^\circ\text{C}$	—	2	90	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA}$ to 1.5 A , $T_j = 25^\circ\text{C}$	—	12	180	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA}$ to 750 mA , $T_j = 25^\circ\text{C}$	—	4.0	90	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	3.9	8	mA
Bias current fluctuation to input	$\Delta I_{Bias(IN)}$	$V_I = 11.5 \text{ V}$ to 26 V , $T_j = 25^\circ\text{C}$	—	—	1.0	mA
Bias current fluctuation to load	$\Delta I_{Bias(L)}$	$I_O = 5 \text{ mA}$ to 1 A , $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 11.5 \text{ V}$ to 21.5 V , $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	56	—	—	dB

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz}$ to 100 kHz	—	57	—	μV
Minimum input/output voltage difference	$V_{DIF(min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
output short-circuit current	$I_{O(\text{Short})}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(\text{Peak})}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C}$ to 125°C	—	-0.5	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(\text{TH})}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7810NSP (10 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 16 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	9.6	10	10.4	V
Output voltage tolerance	V_{O2}	$V_I = 13 \text{ V to } 25 \text{ V}$, $I_O = 5 \text{ mA to } 1 \text{ A}$ $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	9.5	—	10.5	V
Line regulation 1	REG_{IN1}	$V_I = 12.5 \text{ V to } 27 \text{ V}$, $T_j = 25^\circ\text{C}$	—	8	200	mV
Line regulation 2	REG_{IN2}	$V_I = 13 \text{ V to } 19 \text{ V}$, $T_j = 25^\circ\text{C}$	—	2.5	100	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA to } 1.5 \text{ A}$, $T_j = 25^\circ\text{C}$	—	12	200	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA to } 750 \text{ mA}$, $T_j = 25^\circ\text{C}$	—	4.0	100	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	3.9	8	mA
Bias current fluctuation to input	$\Delta I_{Bias(IN)}$	$V_I = 12.5 \text{ V to } 27 \text{ V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
Bias current fluctuation to load	$\Delta I_{Bias(L)}$	$I_O = 5 \text{ mA to } 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 13 \text{ V to } 23 \text{ V}$, $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	56	—	—	dB

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz to } 100 \text{ kHz}$	—	56	—	μV
Minimum input/output voltage difference	$V_{DIF(min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
Output short-circuit current	$I_{O(Short)}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(Peak)}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C to } 125^\circ\text{C}$	—	-0.6	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(TH)}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7812NSP (12 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 19 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	11.5	12	12.5	V
Output voltage tolerance	V_{O2}	$V_I = 15 \text{ V to } 27 \text{ V}$, $I_O = 5 \text{ mA to } 1 \text{ A}$ $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	11.4	—	12.6	V
Line regulation 1	REG_{IN1}	$V_I = 14.5 \text{ V to } 30 \text{ V}$, $T_j = 25^\circ\text{C}$	—	10	240	mV
Line regulation 2	REG_{IN2}	$V_I = 16 \text{ V to } 22 \text{ V}$, $T_j = 25^\circ\text{C}$	—	2	120	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA to } 1.5 \text{ A}$, $T_j = 25^\circ\text{C}$	—	12	240	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA to } 750 \text{ mA}$, $T_j = 25^\circ\text{C}$	—	4.0	120	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	4.0	8	mA
Bias current fluctuation to input	$\Delta I_{Bias(IN)}$	$V_I = 14.5 \text{ V to } 30 \text{ V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
Bias current fluctuation to load	$\Delta I_{Bias(L)}$	$I_O = 5 \text{ mA to } 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 15 \text{ V to } 25 \text{ V}$, $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	55	—	—	dB

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz to } 100 \text{ kHz}$	—	75	—	μV
Minimum input/output voltage difference	$V_{DIF(min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
Output short-circuit current	$I_{O(Short)}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(Peak)}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C to } 125^\circ\text{C}$	—	-0.8	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(TH)}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7815NSP (15 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 23 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	14.4	15	15.6	V
Output voltage tolerance	V_{O2}	$V_I = 18 \text{ V to } 30 \text{ V}$, $I_O = 5 \text{ mA to } 1 \text{ A}$ $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	14.25	—	15.75	V
Line regulation 1	REG_{IN1}	$V_I = 17.5 \text{ V to } 30 \text{ V}$, $T_j = 25^\circ\text{C}$	—	11	300	mV
Line regulation 2	REG_{IN2}	$V_I = 20 \text{ V to } 26 \text{ V}$, $T_j = 25^\circ\text{C}$	—	3	150	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA to } 1.5 \text{ A}$, $T_j = 25^\circ\text{C}$	—	12	300	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA to } 750 \text{ mA}$, $T_j = 25^\circ\text{C}$	—	4.0	150	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	4.0	8	mA
Bias current fluctuation to input	$\Delta I_{Bias(IN)}$	$V_I = 17.5 \text{ V to } 30 \text{ V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
Bias current fluctuation to load	$\Delta I_{Bias(L)}$	$I_O = 5 \text{ mA to } 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 18.5 \text{ V to } 28.5 \text{ V}$, $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	54	—	—	dB

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz to } 100 \text{ kHz}$	—	90	—	μV
Minimum input/output voltage difference	$V_{DIF(min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
Output short-circuit current	$I_{O(Short)}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(Peak)}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C to } 125^\circ\text{C}$	—	-1.0	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(TH)}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

- AN7818NSP (18 V type)

The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10 ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

Unless otherwise specified, $V_I = 27 \text{ V}$, $I_O = 500 \text{ mA}$, $C_I = 0.33 \mu\text{F}$ and $C_O = 0.1 \mu\text{F}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage	V_{O1}	$T_j = 25^\circ\text{C}$	17.3	18	18.7	V
Output voltage tolerance	V_{O2}	$V_I = 21 \text{ V to } 33 \text{ V}$, $I_O = 5 \text{ mA to } 1 \text{ A}$ $T_j = 25^\circ\text{C}$, $P_D < 5 \text{ W}$	17.1	—	18.9	V
Line regulation 1	REG_{IN1}	$V_I = 21 \text{ V to } 33 \text{ V}$, $T_j = 25^\circ\text{C}$	—	14	360	mV
Line regulation 2	REG_{IN2}	$V_I = 24 \text{ V to } 30 \text{ V}$, $T_j = 25^\circ\text{C}$	—	4	180	mV
Load regulation 1	REG_{L1}	$I_O = 5 \text{ mA to } 1.5 \text{ A}$, $T_j = 25^\circ\text{C}$	—	14	360	mV
Load regulation 2	REG_{L2}	$I_O = 250 \text{ mA to } 750 \text{ mA}$, $T_j = 25^\circ\text{C}$	—	4.0	180	mV
Bias current	I_{Bias}	$T_j = 25^\circ\text{C}$	—	4.1	8	mA
Bias current fluctuation to input	$\Delta I_{Bias(IN)}$	$V_I = 21 \text{ V to } 33 \text{ V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
Bias current fluctuation to load	$\Delta I_{Bias(L)}$	$I_O = 5 \text{ mA to } 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	—	0.5	mA
Ripple rejection ratio	RR	$V_I = 22 \text{ V to } 32 \text{ V}$, $I_O = 100 \text{ mA}$, $f = 120 \text{ Hz}$	53	—	—	dB


- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output noise voltage	V_{NO}	$f = 10 \text{ Hz to } 100 \text{ kHz}$	—	110	—	μV
Minimum input/output voltage difference	$V_{DIF(min)}$	$I_O = 1 \text{ A}$, $T_j = 25^\circ\text{C}$	—	2	—	V
Output short-circuit current	$I_{O(Short)}$	$V_I = 35 \text{ V}$, $T_j = 25^\circ\text{C}$	—	700	—	mA
Peak output current	$I_{O(Peak)}$	$T_j = 25^\circ\text{C}$	—	2.0	—	A
Output voltage temperature coefficient	$\Delta V_O / T_a$	$I_O = 5 \text{ mA}$, $T_j = 0^\circ\text{C to } 125^\circ\text{C}$	—	-1.1	—	$\text{mV}/^\circ\text{C}$
Thermal protection operating temperature	$T_{j(TH)}$	$I_O = 5 \text{ mA}$	—	150	—	$^\circ\text{C}$


■ Application Notes

1. $P_D - T_a$ curves of SP-3SU

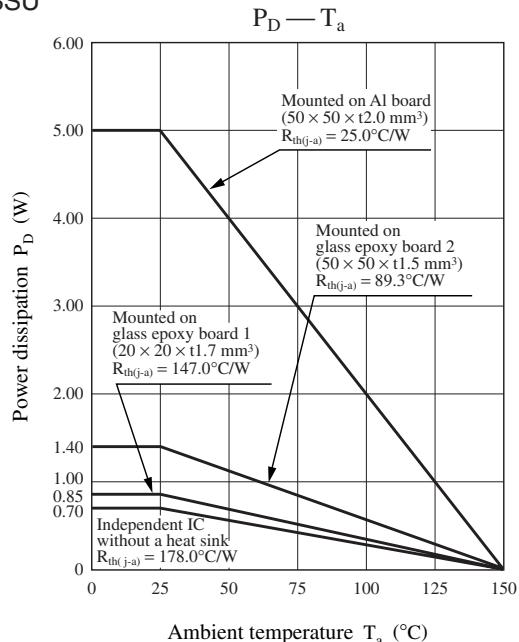


2. Main Characteristics


Minimum input/output voltage difference vs.
load current characteristic

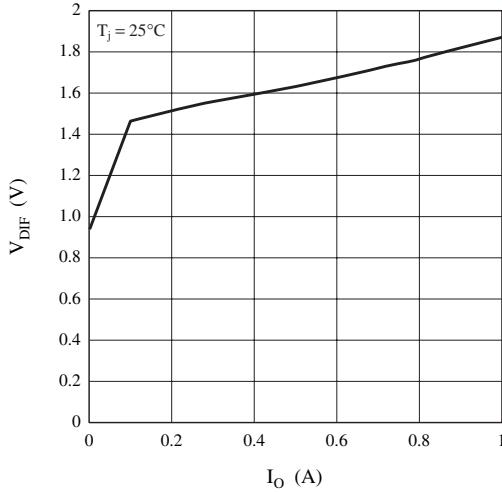

Minimum input/output voltage difference
temperature characteristic

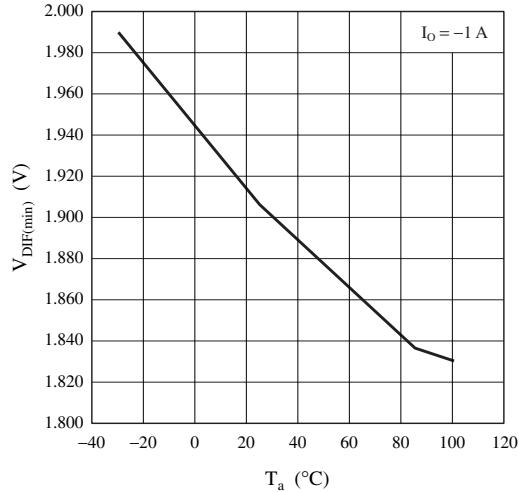

Peak output current temperature characteristic

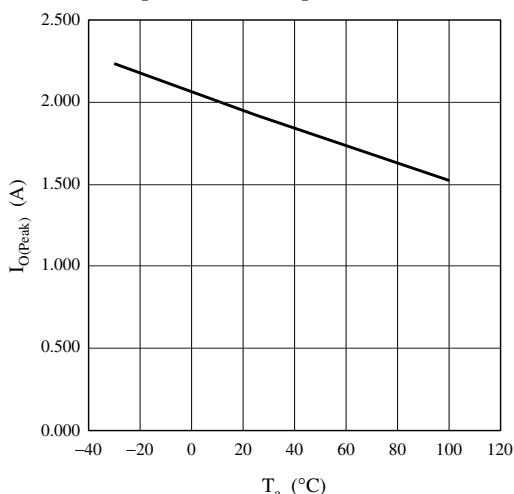

Current limit characteristics

