

# BR<sub>C</sub>144ECM Series

NPN Built-in Resistor Transistor CMPAK Series  
Inverter, Driver, Switching

**HITACHI**

ADE-208-1445B (Z)



Rev.2  
Sep. 2001

## Features

- Built-in Resistor Type
- Simplifies Circuit Design
- Reduces Board Space
- Complementary pair with BRA144ECM series

## Outline

CMPAK

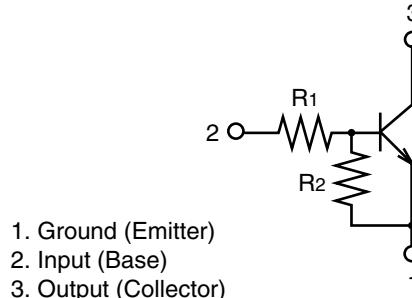

Note: Marking is shown in below.

Device	Marking	R <sub>1</sub> (kΩ)	R <sub>2</sub> (kΩ)
BR <sub>C</sub> 144ECM	BG	47	47
BR <sub>C</sub> 124ECM	DG	22	22
BR <sub>C</sub> 114ECM	FG	10	10
BR <sub>C</sub> 143ECM	HG	4.7	4.7
BR <sub>C</sub> 123ECM	KG	2.2	2.2

## **Absolute Maximum Ratings**

(Ta = 25°C)


<b>Item</b>		<b>Symbol</b>	<b>Ratings</b>	<b>Unit</b>
Supply voltage		V <sub>CC</sub>	50	V
Input voltage	BRC144ECM	V <sub>I</sub>	-10 to +50	V
	BRC124ECM		-10 to +45	
	BRC114ECM		-10 to +30	
	BRC143ECM		-10 to +20	
	BRC123ECM		-10 to +15	
Output current		I <sub>O</sub>	100	mA
Total power dissipation		P <sub>T</sub> *	150	mW
Junction temperature		T <sub>J</sub>	150	°C
Storage temperature		T <sub>STG</sub>	-55 to +150	°C

\*Value on the glass epoxy board. (10 mm × 10 mm × 0.7 mm)






## Electrical Characteristics

(Ta = 25°C)






Item		Symbol	Min	Typ	Max	Unit	Test conditions
Input on voltage	BRC144ECM	V <sub>I(on)</sub>	1.5	—	4.5	V	V <sub>cc</sub> = 0.3 V, I <sub>o</sub> = 5 mA
	BRC124ECM		1.3	—	3.0		
	BRC114ECM		1.2	—	2.4		
	BRC143ECM		1.1	—	2.0		
	BRC123ECM		1.1	—	1.8		
Input off voltage	BRC144ECM	V <sub>I(off)</sub>	1.0	—	1.5	V	V <sub>cc</sub> = 5 V, I <sub>o</sub> = 100 µA
	BRC124ECM		1.0	—	1.5		
	BRC114ECM		1.0	—	1.5		
	BRC143ECM		1.0	—	1.5		
	BRC123ECM		1.0	—	1.5		
Output saturation voltage		V <sub>O(on)</sub>	—	—	0.3	V	I <sub>o</sub> = 10 mA, I <sub>i</sub> = 0.5 mA
Output cutoff current		I <sub>O(off)</sub>	—	—	0.5	µA	V <sub>cc</sub> = 50 V, I <sub>i</sub> = 0
DC current transfer ratio	BRC144ECM	Gi	70	—	—		V <sub>cc</sub> = 5 V, I <sub>o</sub> = 5 mA
	BRC124ECM		56	—	—		
	BRC114ECM		30	—	—		
	BRC143ECM		20	—	—		V <sub>cc</sub> = 5 V, I <sub>o</sub> = 10 mA
	BRC123ECM		20	—	—		V <sub>cc</sub> = 5 V, I <sub>o</sub> = 20 mA
Input resistance	BRC144ECM	R <sub>i</sub>	33	47	61	kΩ	
	BRC124ECM		15	22	28		
	BRC114ECM		7	10	13		
	BRC143ECM		3.3	4.7	6.1		
	BRC123ECM		1.5	2.2	2.8		
Resistance ratio		R <sub>i</sub> /R <sub>2</sub>	0.8	1.0	1.2		

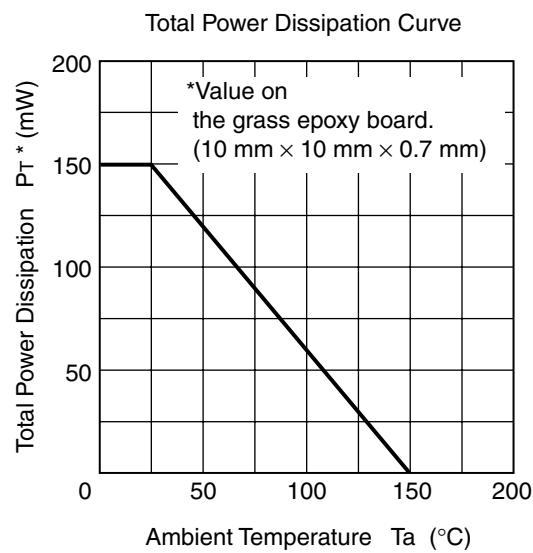






## Main Characteristics (BR144ECM)

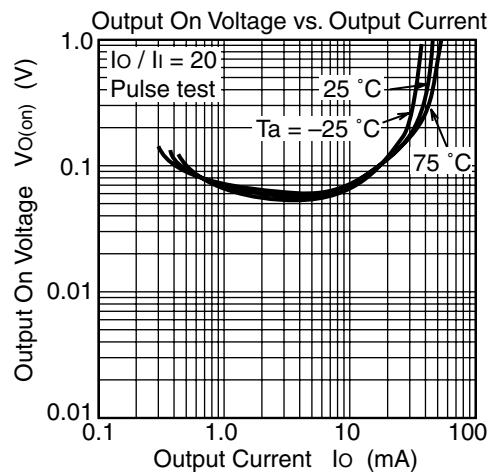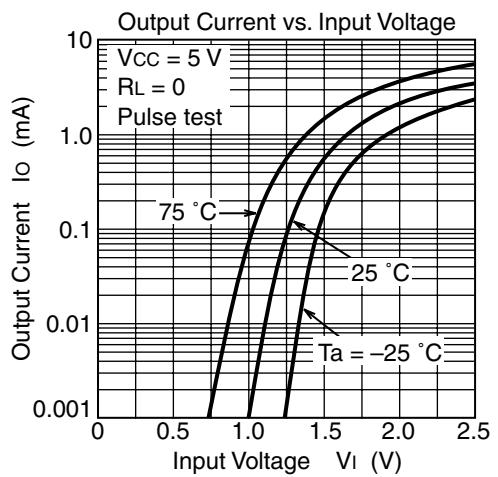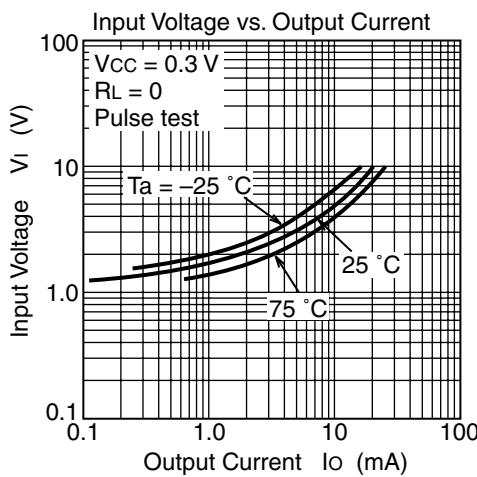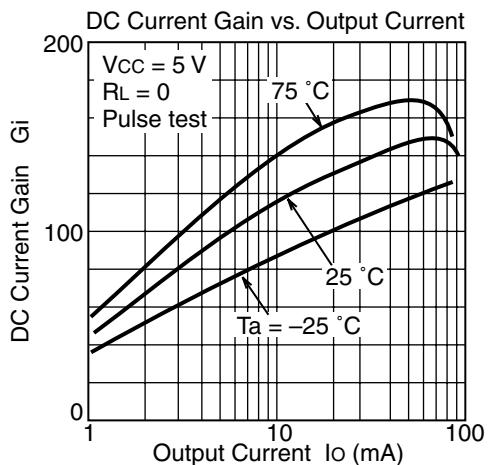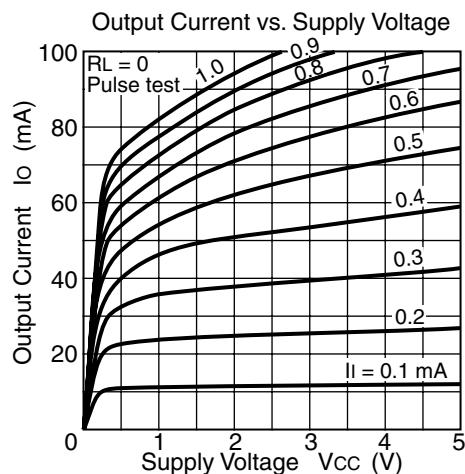






## Main Characteristics (BRC124ECM)

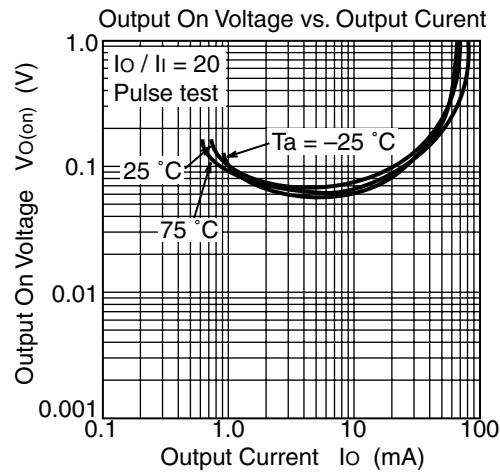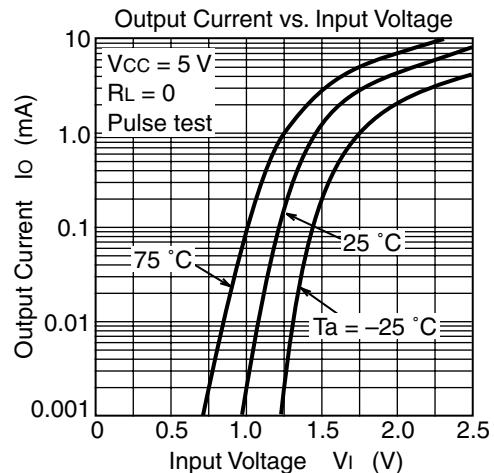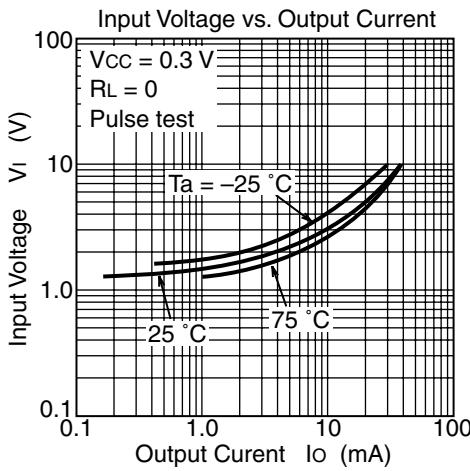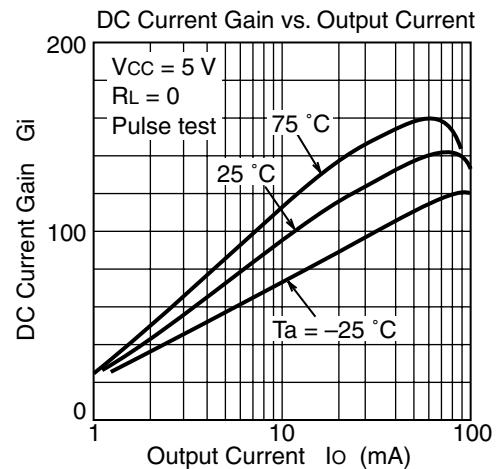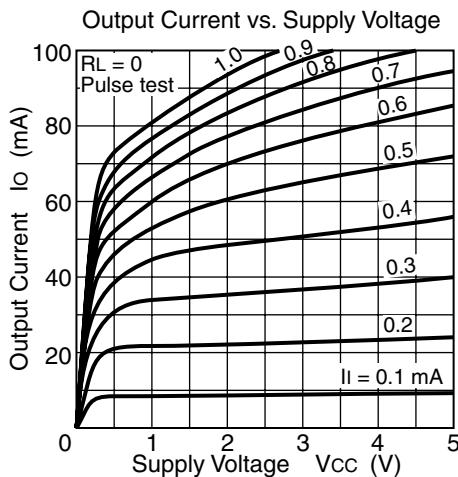






## Main Characteristics (BR144ECM)

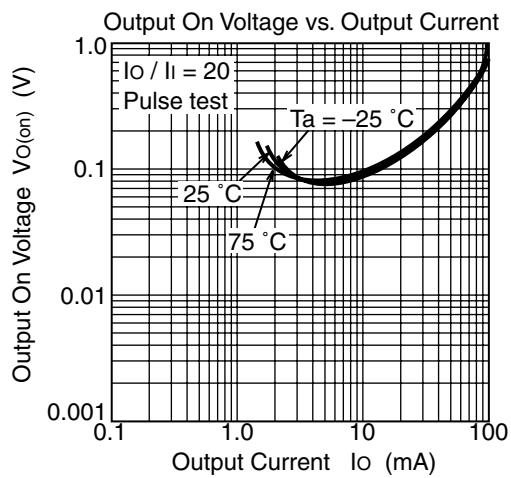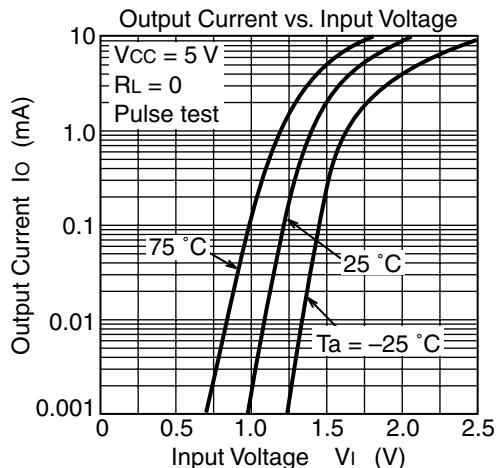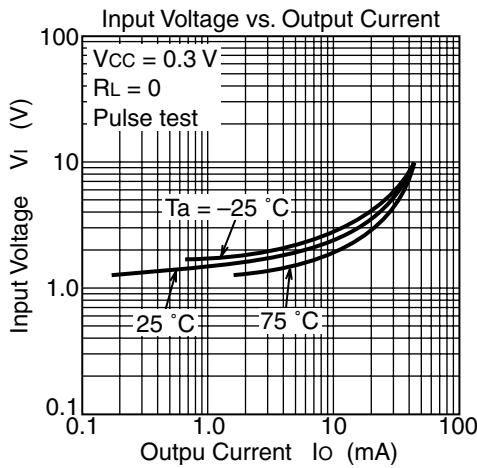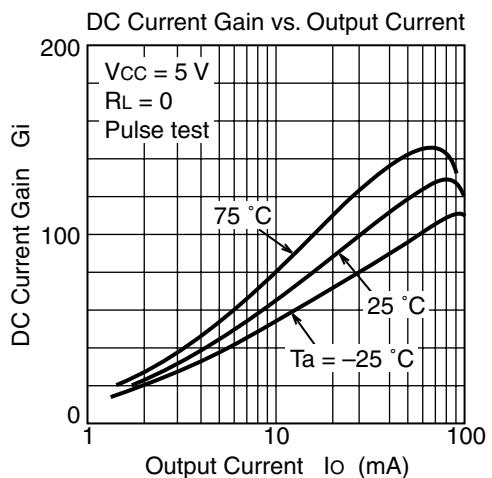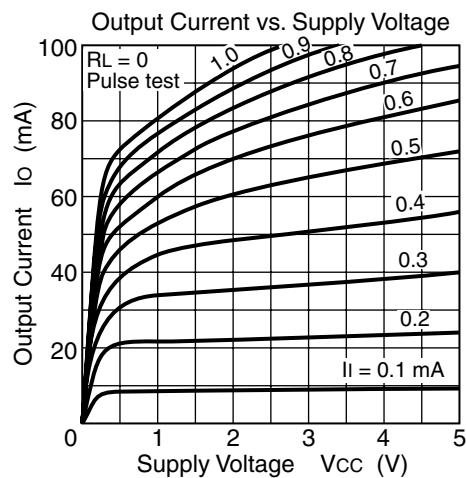

## Main Characteristics (BRC143ECM)

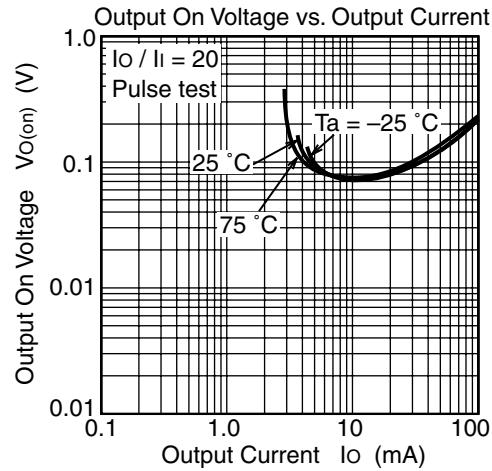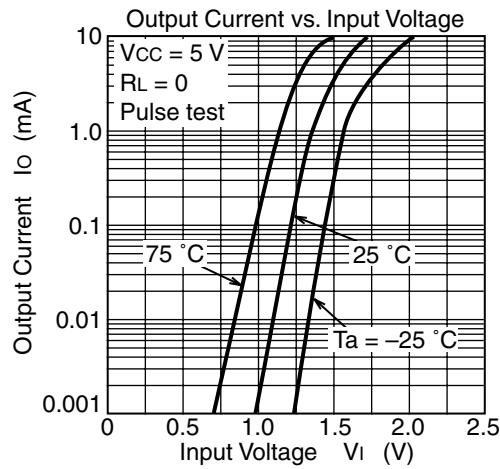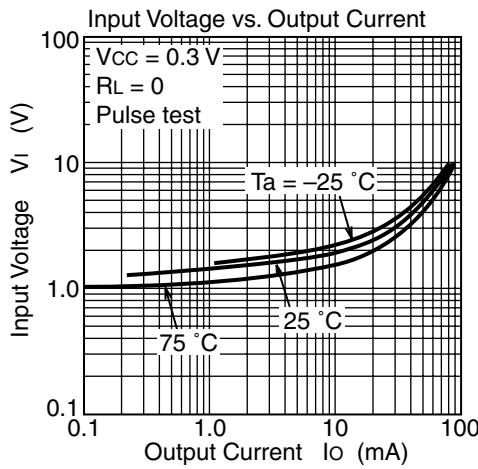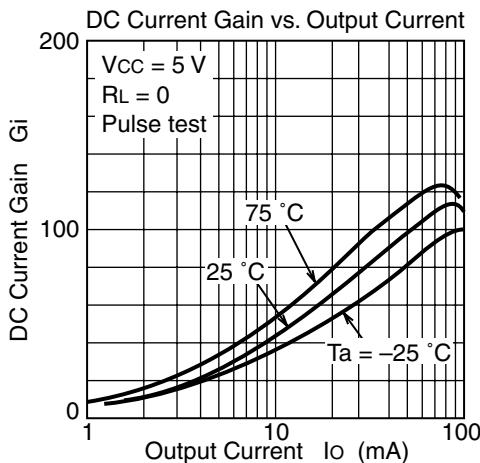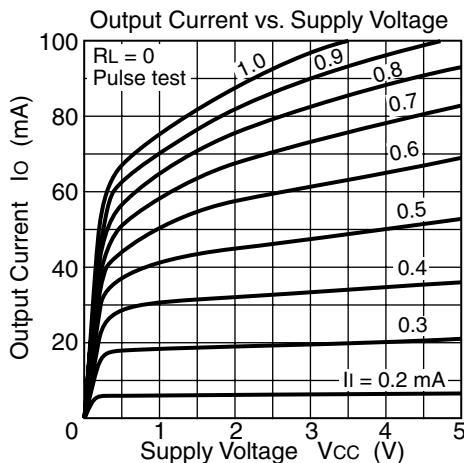

## Main Characteristics (BR123ECM)

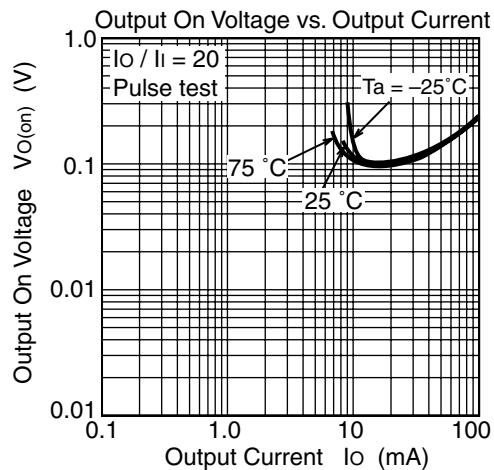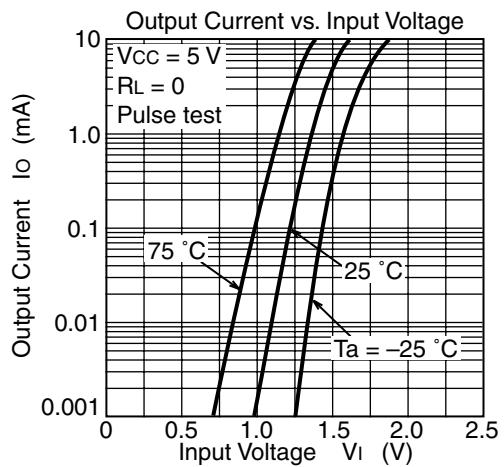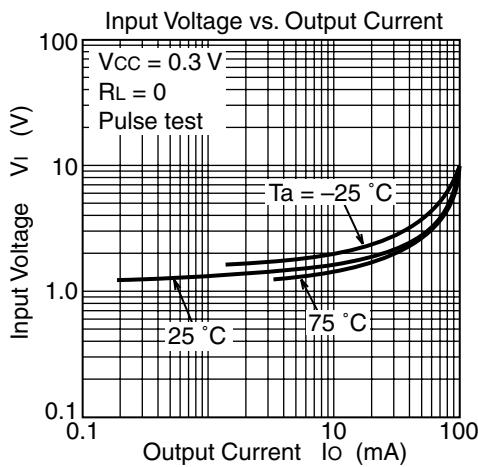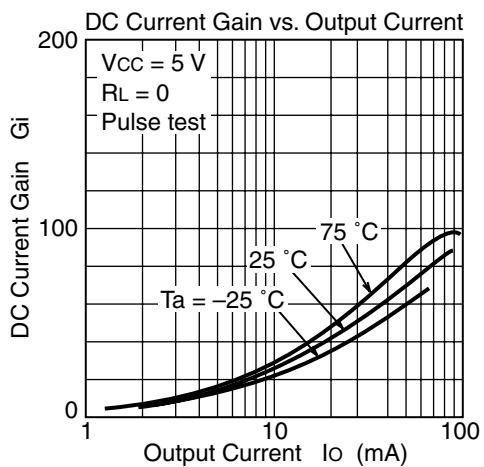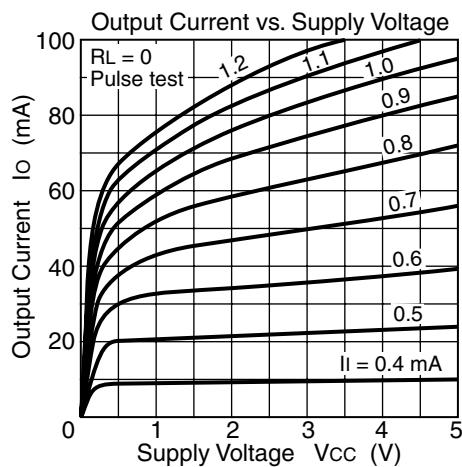

## Taping Specification


There are two different size reels in CMPAK packaging.

Packing to "Left" direction

Purchasing Identification Code

Standard Reel 3000 pcs/reel: Type No. + Mark **TL**

Large Reel 12000 pcs/reel: Type No. + Mark **UL**

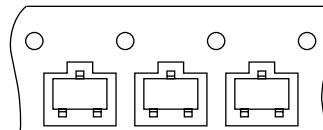


Marking face is up.  
Center lead goes to left.

Direction of feed →

## Package Dimensions


As of January, 2001  
Unit: mm

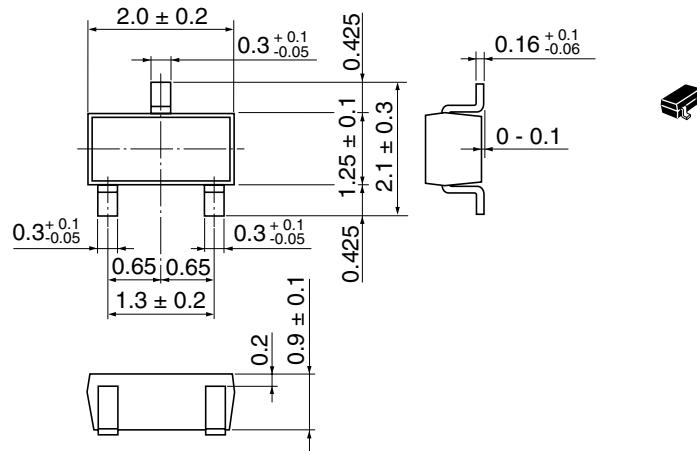

Hitachi Code	CMPAK
JEDEC	—
EIAJ	Conforms
Mass (reference value)	0.006 g

## Footprint

CMPAK

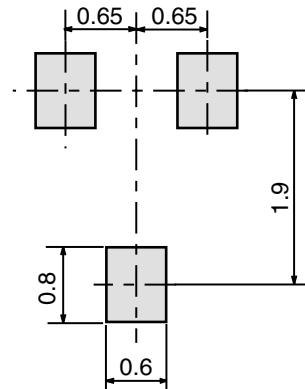

## Disclaimer

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

## Sales Offices

---

# HITACHI

**Hitachi, Ltd.**

Semiconductor & Integrated Circuits  
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan  
Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL      <http://www.hitachisemiconductor.com/>

### For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive San Jose, CA 95134 Tel: <1>(408) 433-1990 Fax: <1>(408) 433-0223	Hitachi Europe Ltd. Electronic Components Group Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 585200	Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00 Singapore 049318 Tel : <65>-538-6533/538-8577 Fax : <65>-538-6933/538-3877 URL : <a href="http://semiconductor.hitachi.com.sg">http://semiconductor.hitachi.com.sg</a>	Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower World Finance Centre, Harbour City, Canton Road Tsim Sha Tsui, Kowloon, Hong Kong Tel : <852>-(2)-735-9218 Fax : <852>-(2)-730-0281 URL : <a href="http://semiconductor.hitachi.com.hk">http://semiconductor.hitachi.com.hk</a>
	Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen Postfach 201, D-85619 Feldkirchen Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00	Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road Hung-Kuo Building Taipei (105), Taiwan Tel : <886>-(2)-2718-3666 Fax : <886>-(2)-2718-8180 Telex : 2322 HAS-TP URL : <a href="http://www.hitachi.com.tw">http://www.hitachi.com.tw</a>	

Copyright © Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.  
Colophon 5.0