

---

# HM62832UH Series

256 k High Speed SRAM (32-kword × 8-bit)

# HITACHI

---

## Features

- High speed: Fast access time 15/20 ns (max)
- Low Power  
Standby: 15  $\mu$ W (typ) (L-version)  
Operation: 675/600 mW (typ)
- Single 5 V supply
- Completely static memory  
No clock or timing strobe required
- Equal access and cycle times
- Common data input and output: Three state output
- Directly TTL compatible: All inputs and outputs


## Ordering Information

Type No.	Access Time	Package
HM62832UHP-15	15 ns	300-mil 28-pin plastic DIP (DP-28NA)
HM62832UHP-20	20 ns	
HM62832UHLP-15	15 ns	
HM62832UHLP-20	20 ns	
HM62832UHJP-15	15 ns	300-mil 28-pin plastic SOJ (CP-28DN)
HM62832UHJP-20	20 n	
HM62832UHLJP-15	15 ns	
HM62832UHLJP-20	20 ns	

---

# HM62832UH Series

## Pin Arrangement

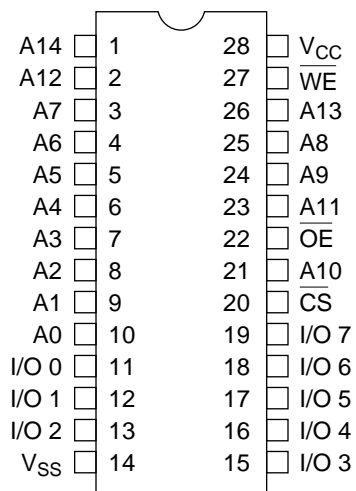


(Top view)

## Pin Description

Pin name	Function
A0 – A14	Address
I/O0 – I/O7	Input/output
CS	Chip select
WE	Write enable
OE	Output enable
V <sub>CC</sub>	Power supply
V <sub>SS</sub>	Ground

Block Diagram

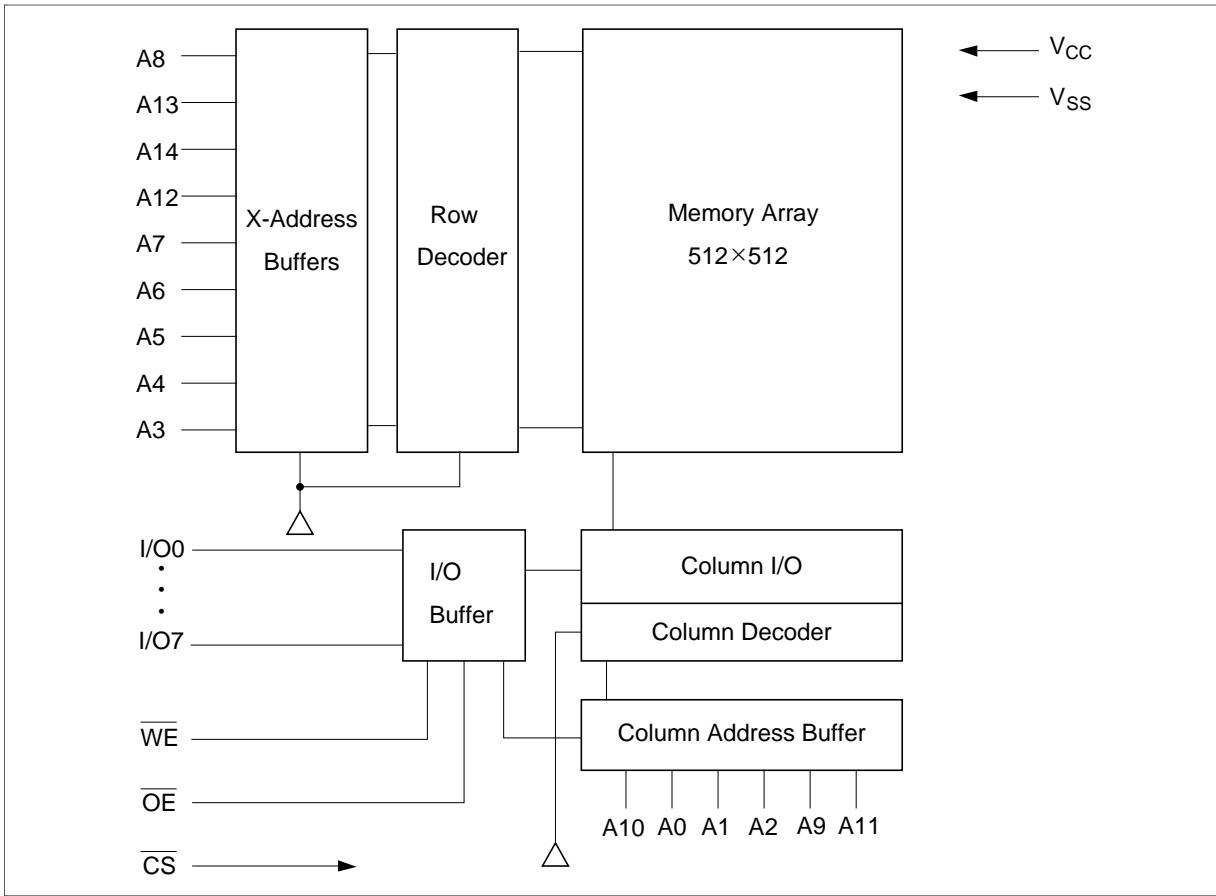

Function Table

$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	Mode	$V_{CC}$ Current	I/O Pin	Ref. Cycle
H	X	X	Standby	$I_{SB}, I_{SB1}$	High-Z	
L	L	H	Read	$I_{CC}$	Dout	Read cycle 1, 2, 3
L	H	L	Write	$I_{CC}$	Din	Write cycle 1
L	L	L	Write	$I_{CC}$	Din	Write cycle 2

Note: X : H or L

# HM62832UH Series

## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply voltage <sup>1</sup>	$V_{CC}$	-0.5 <sup>2</sup> to +7.0	V
Voltage on any pin relative to $V_{SS}$ <sup>1</sup>	$V_T$	-0.5 <sup>2</sup> to $V_{CC} + 0.5$	V
Power dissipation	$P_T$	1.0	W
Operating temperature	$T_{opr}$	0 to +70	°C
Storage temperature	$T_{stg}$	-55 to +125	°C
Storage temperature under bias	$T_{bias}$	-10 to +85	°C

Notes: 1. With respect to  $V_{SS}$

2.  $V_{CC}$  and  $V_T$  min = -2.5 V for pulse width  $\leq 10$  ns

## Recommended DC Operating Conditions ( $T_a = 0$ to +70°C)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	$V_{CC}$	4.5	5.0	5.5	V
	$V_{SS}$	0	0	0	V
Input high (logic 1) voltage	$V_{IH}$	2.2	—	$V_{CC} + 0.5$	V
Input low (logic 0) voltage	$V_{IL}$	-0.5 <sup>1</sup>	—	0.8	V

Note: 1.  $V_{IL}$  min = -2.0 V for pulse width  $\leq 10$  ns

**DC Characteristics** ( $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{CC} = 5\text{ V} \pm 10\%$ ,  $V_{SS} = 0\text{ V}$ )

Parameter	Symbol	Min	Typ <sup>*1</sup>	Max	Unit	Test Conditions
Input leakage current	$ I_{IL} $	—	—	2.0	$\mu\text{A}$	$V_{CC} = 5.5\text{ V}$ $V_{in} = V_{SS}$ to $V_{CC}$
Output leakage current	$ I_{LO} $	—	—	2.0	$\mu\text{A}$	$\overline{CS} = V_{IH}$ $V_{IO} = V_{SS}$ to $V_{CC}$
Operating $V_{CC}$ current	$I_{CC1} (-15)^{\text{*3}}$	—	135	170	mA	min cycle <sup>*2</sup>
	$I_{CC2} (-15)$	—	100	120	mA	2x min cycle
	$I_{CC1} (-20)$	—	120	150	mA	min cycle
	$I_{CC2} (-20)$	—	90	110	mA	2x min cycle
Standby $V_{CC}$ current	$I_{SB} (-15)$	—	40	60	mA	$\overline{CS} = V_{IH}$ , min cycle
	$I_{SB} (-20)$	—	30	50		
Standby $V_{CC}$ current (1)	$I_{SB1} (\text{L-version})$	—	0.02	2.0	mA	$\overline{CS} \geq V_{CC} - 0.2\text{ V}$ $0\text{ V} \leq V_{in} \leq 0.2\text{ V}$ or $V_{CC} - 0.2\text{ V} \leq V_{in}$
		—	0.003	0.1		
Output low voltage	$V_{OL}$	—	—	0.4	V	$I_{OL} = 8\text{ mA}$
Output high voltage	$V_{OH}$	2.4	—	—	V	$I_{OH} = -4.0\text{ mA}$

Notes: 1. Typical values are at  $V_{CC} = 5.0\text{ V}$ ,  $T_a = 25^\circ\text{C}$  and not guaranteed.

2.  $\overline{CS} = V_{IL}$ ,  $I_{out} = 0\text{ mA}$

3. Access time version

**Capacitance** ( $T_a = 25^\circ\text{C}$ ,  $f = 1.0\text{ MHz}$ )<sup>\*1</sup>

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Input capacitance	$C_{in}$	—	—	6	pF	$V_{in} = 0\text{ V}$
Output capacitance	$C_{out}$	—	—	10	pF	$V_{IO} = 0\text{ V}$


Note: 1. This parameter is sampled and not 100% tested.

# HM62832UH Series

**AC Characteristics** ( $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{CC} = 5\text{ V} \pm 10\%$ , unless otherwise noted.)


## Test Conditions

- Input pulse levels:  $V_{SS}$  to 3.0 V
- Input rise and fall time: 4 ns
- Input and Output timing reference levels: 1.5 V
- Output load: See figures



Output load (A)

Note: 1. Including scope and jig



Output load (B)


(for  $t_{CLZ}$ ,  $t_{OLZ}$ ,  $t_{CHZ}$ ,  $t_{OHZ}$ ,  $t_{WHZ}$  and  $t_{OW}$ )

## Read Cycle

Parameter	Symbol	HM62832UH-15		HM62832UH-20		Unit
		Min	Max	Min	Max	
Read cycle time	$t_{RC}$	15	—	20	—	ns
Address access time	$t_{AA}$	—	15	—	20	ns
Chip select access time	$t_{ACS}$	—	15	—	20	ns
Chip selection to output in low-Z	$t_{CLZ}^{*1}$	3	—	3	—	ns
Output enable to output valid	$t_{OE}$	—	8	—	10	ns
Output enable to output in low-Z	$t_{OLZ}^{*1}$	0	—	0	—	ns
Chip deselection to output in high-Z	$t_{CHZ}^{*1}$	0	7	0	10	ns
Chip disable to output in high-Z	$t_{OHZ}^{*1}$	0	7	0	10	ns
Output hold from address change	$t_{OH}$	3	—	3	—	ns


Note: 1. Transition is measured  $\pm 200$  mV from steady state voltage with Load (B). This parameter is sampled and not 100% tested.

Read Timing Waveform (1)<sup>\*1</sup> ( $\overline{WE} = V_{IH}$ )

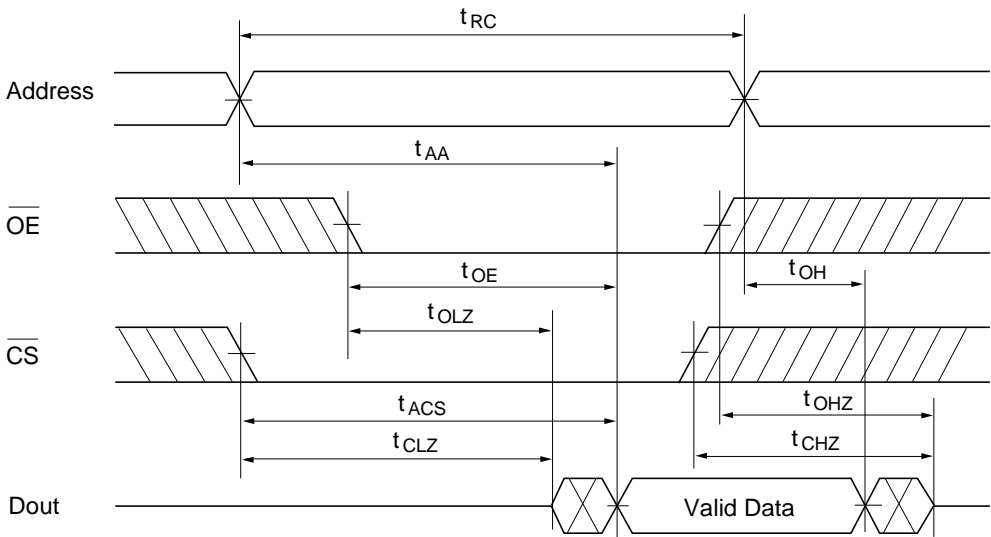

Note: 1. Transition is measured  $\pm 200$  mV from steady state voltage with Load (B). This parameter is sampled and not 100% tested.


Read Timing Waveform (2)<sup>\*1</sup> ( $\overline{WE} = V_{IH}, \overline{CS} = V_{IL}, \overline{OE} = V_{IL}$ )

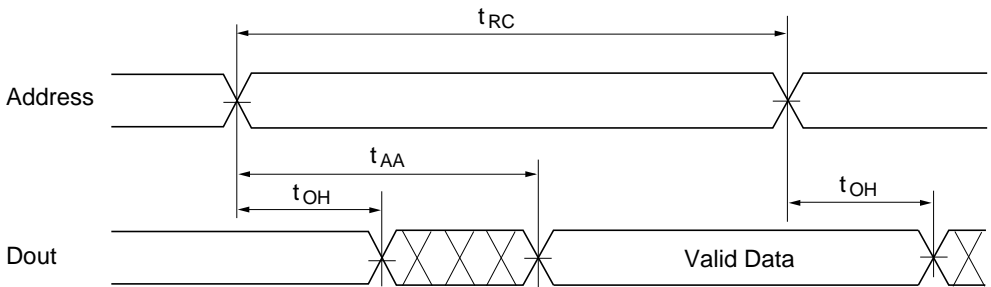

Note: 1. Transition is measured  $\pm 200$  mV from steady state voltage with Load (B). This parameter is sampled and not 100% tested.

# HM62832UH Series

## Read Timing Waveform (3) <sup>\*1, \*2</sup> ( $\overline{WE} = V_{IH}, \overline{OE} = V_{IL}$ )

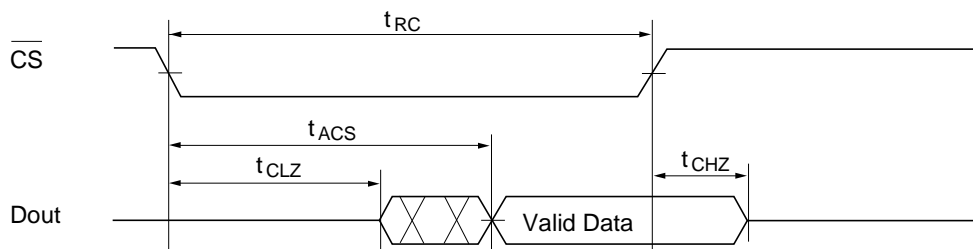

- Notes: 1. Transition is measured  $\pm 200$  mV from steady state voltage with Load (B). This parameter is sampled and not 100% tested.  
 2. Address valid prior to or coincident with  $\overline{CS}$  transition low.


## Write Cycle

Parameter	Symbol	HM62832UH-15		HM62832UH-20		Unit
		Min	Max	Min	Max	
Write cycle time	$t_{WC}$	15	—	20	—	ns
Chip selection to end of write	$t_{CW}$	10	—	12	—	ns
Address valid to end of write	$t_{AW}$	13	—	15	—	ns
Address setup time	$t_{AS}$	0	—	0	—	ns
Write pulse width <sup>2</sup>	$t_{WP}$	10	—	12	—	ns
Write recovery time <sup>3</sup>	$t_{WR}$	0	—	0	—	ns
Output disable to output in high-Z <sup>1, 4</sup>	$t_{OHZ}$	0	7	0	10	ns
Write to output in high-Z <sup>1, 4</sup>	$t_{WHZ}$	0	7	0	10	ns
Data to write time overlap	$t_{DW}$	8	—	10	—	ns
Data hold from write time <sup>6</sup>	$t_{DH}$	0	—	0	—	ns
Output active from end of write <sup>*1, 6</sup>	$t_{OW}$	3	—	3	—	ns
Output hold from address change <sup>5</sup>	$t_{OH}$	3	—	3	—	ns

- Notes: 1. Transition is measured  $\pm 200$  mV from high impedance voltage with Load (B). This parameter is sampled and not 100% tested.  
 2. A write occurs during the overlap ( $t_{WP}$ ) to a low  $\overline{CS}$  and a low  $\overline{WE}$ .  
 3.  $t_{WR}$  is measured from the earliest of  $\overline{CS}$  or  $\overline{WE}$  going high to the end of write cycle.  
 4. During this period, I/O pins are in the output state so that the input signals of the opposite phase to the outputs must not be applied.  
 5. Dout is the same phase of write data of this write cycle.  
 6. If  $\overline{CS}$  is low during this period, I/O pins are in the output state. Then the data input signals of opposite phase to the outputs must not be applied to them.




Write Timing Waveform (1)

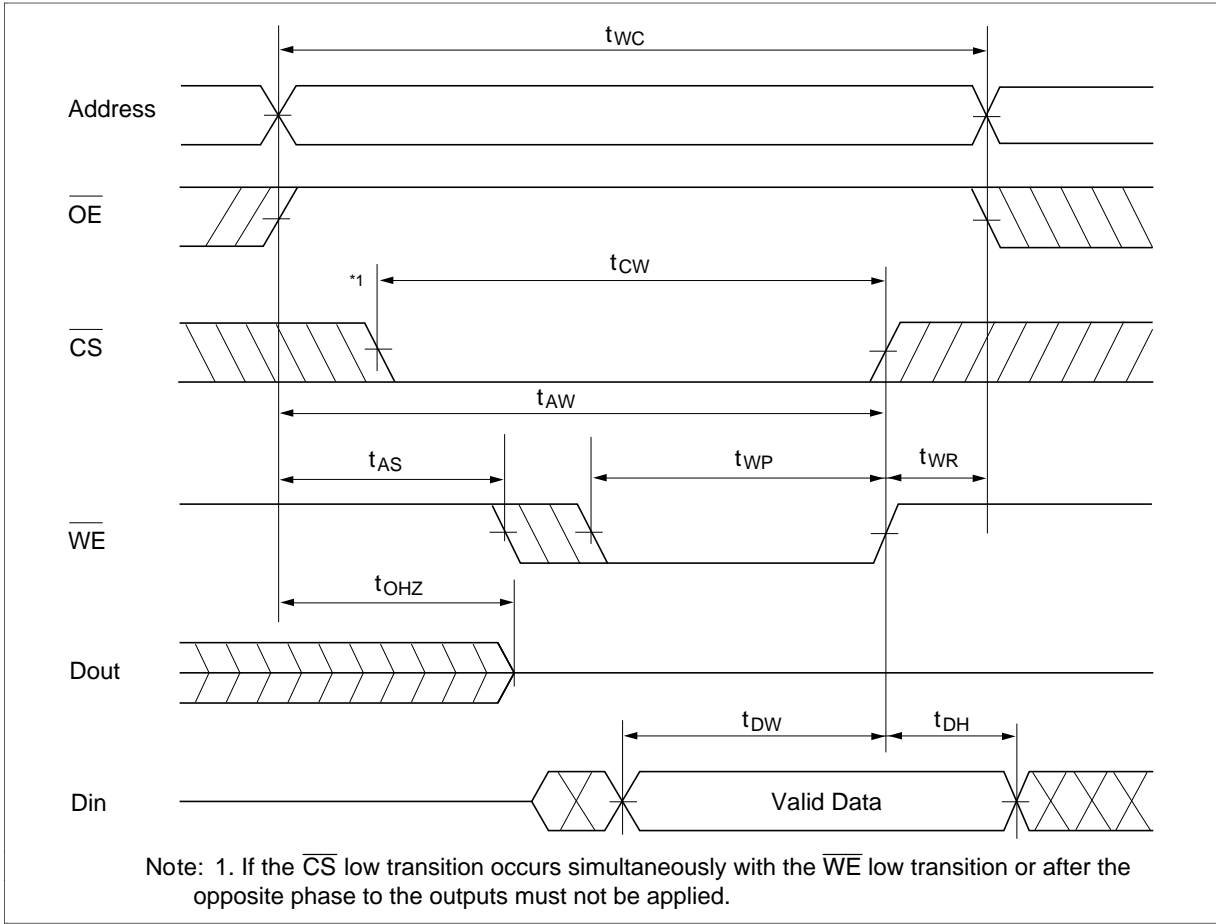

# HM62832UH Series

## Write Timing Waveform (2) ( $\overline{\text{OE}}$ low Fixed)<sup>\*4</sup>

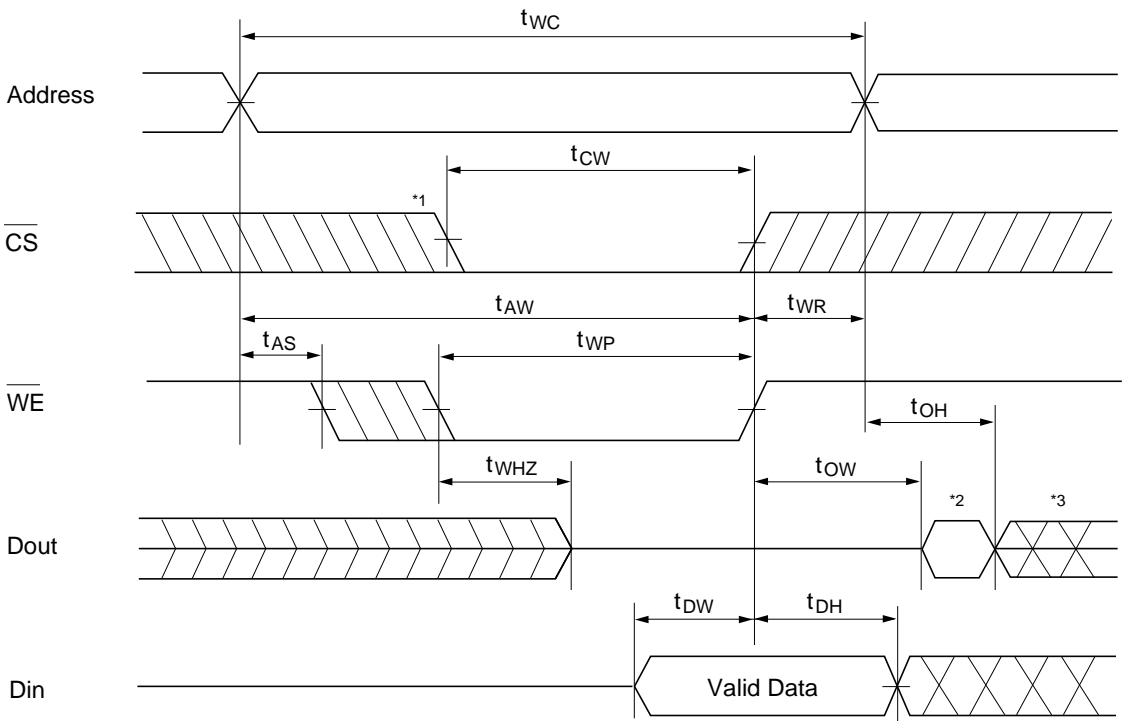

- Notes:
1. If the  $\overline{\text{CS}}$  low transition occurs simultaneously with the  $\overline{\text{WE}}$  low transitions or after the  $\overline{\text{WE}}$  transition, output remain in a high impedance state.
  2. Dout is the same phase of write data of this write cycle.
  3. Dout is the read data of next address.
  4.  $\overline{\text{WE}}$  must be high during all address transition except when device is disable with  $\overline{\text{CS}}$ .


**Low  $V_{CC}$  Data Retention Characteristics ( $T_a = 0$  to  $+70^\circ\text{C}$ )**

This characteristics is guaranteed only for L-version.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
$V_{CC}$ for data retention	$V_{DR}$	2	—	—	V	$\overline{CS} \geq V_{CC} - 0.2\text{V}$ , $V_{in} \geq V_{CC} - 0.2\text{V}$ or $0\text{V} < V_{in} \leq 0.2\text{V}$
Data retention current	$I_{CCDR}$	—	2	$50^{*1}$	$\mu\text{A}$	
Chip deselect to data retention time	$t_{CDR}$	0	—	—	ns	
Operation recovery time	$t_R$	5	—	—	ms	

Note: 1.  $V_{CC} = 3.0\text{V}$

**Low  $V_{CC}$  Data Retention Timing Waveform**

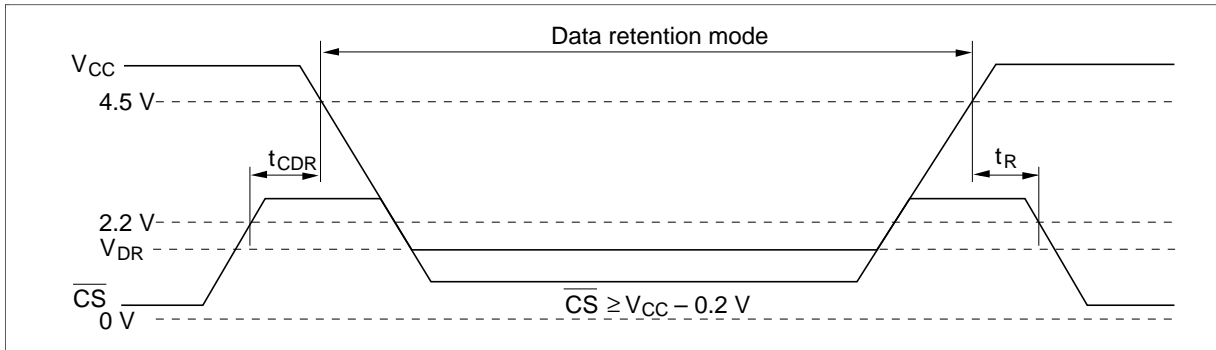


# HM62832UH Series

## Package Dimensions


HM62832UHP/UHLP Series (DP-28NA)

Unit: mm

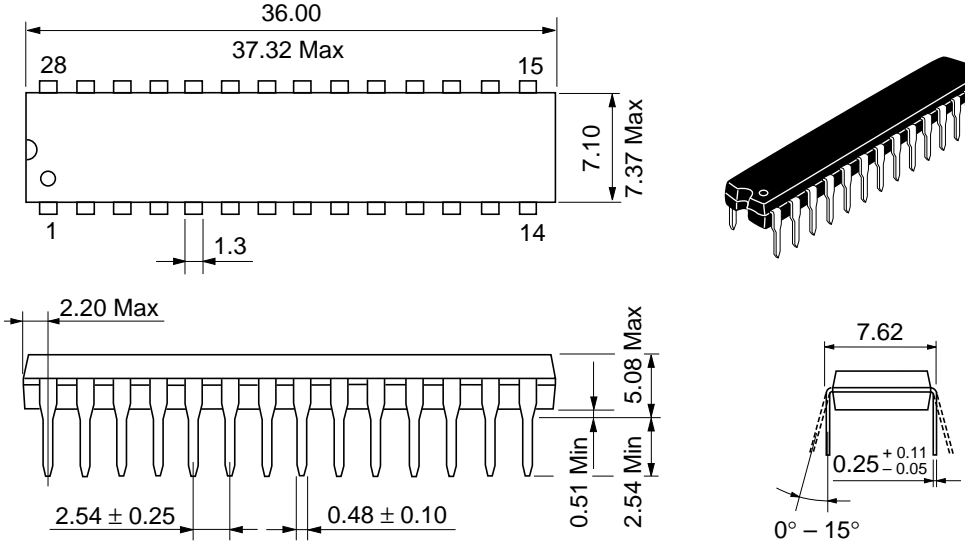

HM62832UHJP/UHLJP Series (CP-28DN)

Unit: mm

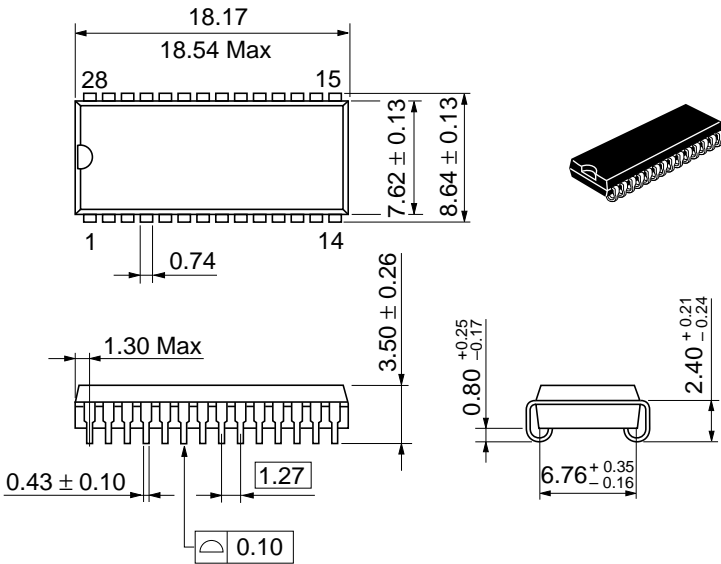

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

---

---

# HITACHI

## **Hitachi, Ltd.**

Semiconductor & IC Div.  
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100, Japan  
Tel: Tokyo (03) 3270-2111  
Fax: (03) 3270-5109

## **For further information write to:**

Hitachi America, Ltd.  
Semiconductor & IC Div.  
2000 Sierra Point Parkway  
Brisbane, CA. 94005-1835  
U S A  
Tel: 415-589-8300  
Fax: 415-583-4207

Hitachi Europe GmbH  
Electronic Components Group  
Continental Europe  
Dornacher Straße 3  
D-85622 Feldkirchen  
München  
Tel: 089-9 91 80-0  
Fax: 089-9 29 30 00

Hitachi Europe Ltd.  
Electronic Components Div.  
Northern Europe Headquarters  
Whitebrook Park  
Lower Cookham Road  
Maidenhead  
Berkshire SL6 8YA  
United Kingdom  
Tel: 0628-585000  
Fax: 0628-778322

Hitachi Asia Pte. Ltd.  
16 Collyer Quay #20-00  
Hitachi Tower  
Singapore 0104  
Tel: 535-2100  
Fax: 535-1533

Hitachi Asia (Hong Kong) Ltd.  
Unit 706, North Tower,  
World Finance Centre,  
Harbour City, Canton Road  
Tsim Sha Tsui, Kowloon  
Hong Kong  
Tel: 27359218  
Fax: 27306071