

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

TA2029FN, TA2029N


FM F / E + AM / FM IF + PW IC FOR DIGITAL TUNING SYSTEM

The TA2029FN/N are AM/FM single chip radio system ICs which are designed for Monaural Radio.

These ICs have many functions and can be used for Digital Tuning System.

FEATURES

- Built-in FM F/E, AM/FM IF, electronic volume and power amplifier.
- Suitable for combination with digital tuning system which has IF counter.
 - AM/FM IF output for IF counter.
 - FM : 1.3375 MHz (1/8 IF)
 - AM : 450 kHz
 - AM/FM oscillation buffer outputs.
 - Auto stop sensitivity at the searching mode is adjustable by external resistances. (Pin⑤, Pin⑥)
- Adjustment-free type FM detector.
- Built-in AF power amplifier, electronic volume and audio muting circuits.
- Detector outputs FM/AM are independent each other.
- $P_O = 100 \text{ mW (Typ.)}$, THD = 10% (FN : $3 \text{ V} / 8 \Omega$)
 $P_O = 500 \text{ mW (Typ.)}$, THD = 10% (N : $6 \text{ V} / 8 \Omega$)
- Operating supply voltage range
 : $V_{CC} = 1.8 \sim 8 \text{ V}$ ($T_a = 25^\circ\text{C}$)

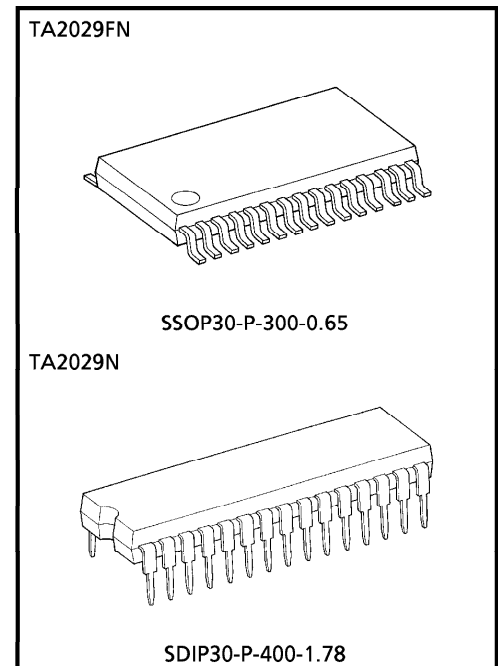


Weight

SSOP30-P-300-0.65 : 0.17 g (Typ.)
 SDIP30-P-400-1.78 : 2.2 g (Typ.)

980910EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.






BLOCK DIAGRAM

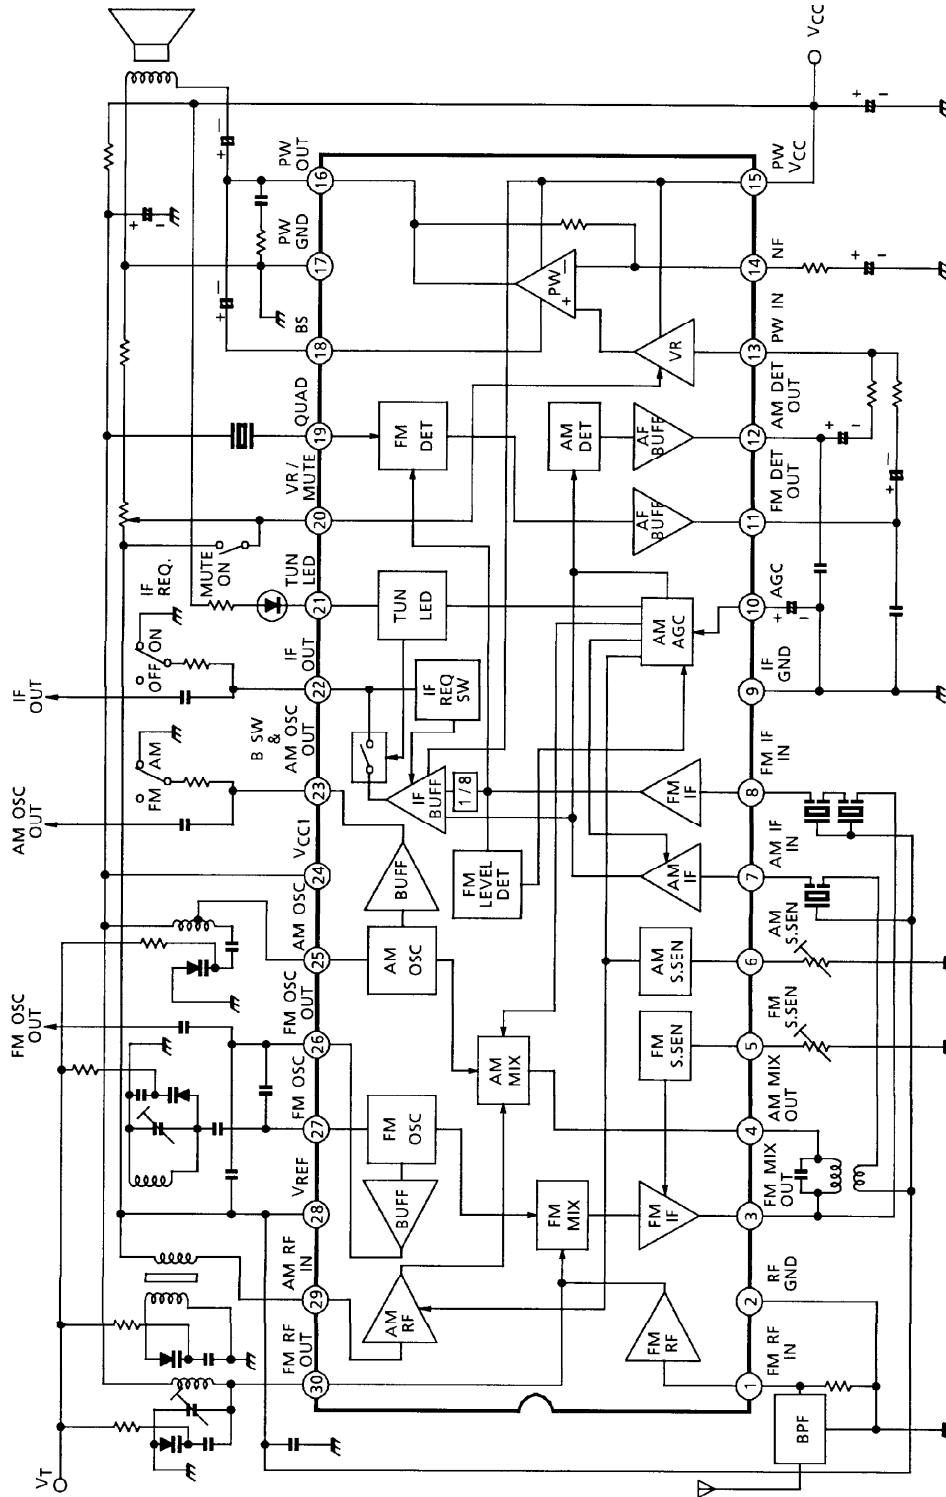

EXPLANATION OF TERMINALS (Note : Ta = 25°C, VCC = 3 V, at no signal)

PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (Typ.)	
			AM	FM
1	FM RF IN FM RF input terminal		0	0.7
2	RF GND (GND of RF stage)	—	0	0
3	FM MIX OUT Ceramic filter is connected. Recommendation SFE10.7MA5L (MURATA MFG. CO., LTD)		2.3	1.8
4	AM MIX OUT		2.3	1.8
5	FM S.SEN Adjustable for FM IF output Sensitivity by external resistor.		0	0.3
6	AM S.SEN Adjustable for AM IF output Sensitivity by external resistor.		0.3	0

PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (Typ.)	
			AM	FM
7	AM IF IN		1.22	1.2
8	FM IF IN		3.0	3.0
9	IF GND (GND of AM / FM IF)	—	0	0
10	AGC (AM AGC) Capacitor is connected.		0	0
11	FM DET OUT FM detector output terminal.		—	1.2
12	AM DET OUT AM detector output terminal.		0.5	1.2

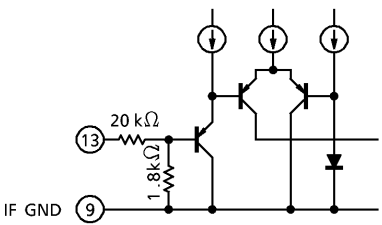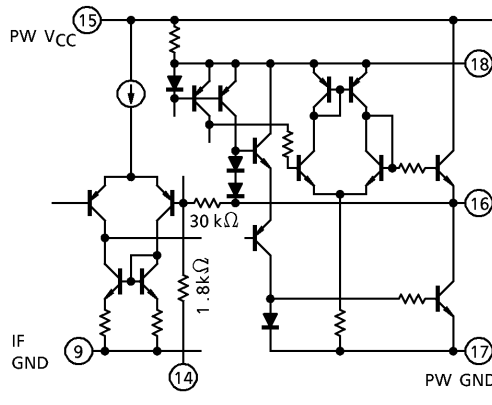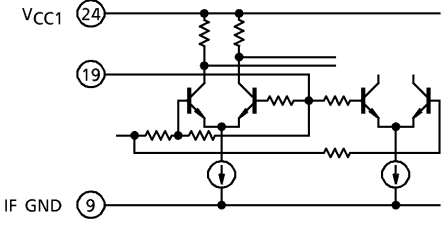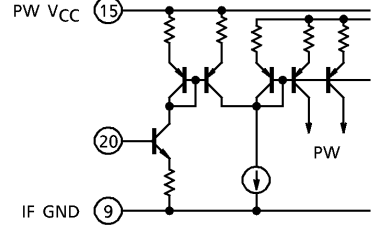PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (Typ.)	
			AM	FM
13	PW IN		0	0
14	NF Capacitor is connected.		0.8	0.8
15	PW VCC (VCC of PW and Buffer amplifier for IF Counter.)		3.0	3.0
16	PW OUT		1.6	1.6
17	PW GND (GND of PW)		0	0
18	BS Capacitor is connected.		3.0	3.0
19	QUAD FM QUAD Detector Ceramic discriminator is connected Recommendation CDA10.7MG36. (MURATA MFG. CO., LTD)		2.5	2.3
20	MUTE / VR • Variable resistor for electronic volume control is connected. • Mute terminal V ₂₀ : V _{ref} → MUTE ON		—	—
21	TUN LED		—	—

PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (Typ.)	
			AM	FM
22	<p>IF OUT IF output terminal Pin⑳ connects with GND by resistor → Come out Pin㉑ : OPEN → Non output</p>		2.5	2.5
23	<p>AM OSC OUT / BAND SW AM Oscillation Buffer Output Terminal. Bias Terminal for AM / FM Switch Circuit. Pin㉓ connects with GND by resistor → AM MODE Pin㉔ : OPEN → FM MODE</p>		1.7	2.5
24	VCC1 (VCC of RF stage)	—	3.0	3.0
25	<p>AM OSC AM OSC Tank circuit is connected.</p>		3.0	3.0
26	<p>FM OSC OUT Capacitor is connected between Pin ㉖ and Pin ㉗ shown in the right figure.</p>		0.7	0.5
27	<p>FM OSC FM OSC Tank circuit is connected shown in the right figure.</p>		1.22	1.15
28	<p>Vref Regulator voltage output terminal Vref = 1.2 V (Typ.) : FM MODE 1.22 V (Typ.) : AM MODE</p>		1.22	1.2

PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (Typ.)	
			AM	FM
29	AM RF IN AM RF input terminal.		1.22	1.2
30	FM RF OUT FM RF Tank circuit is connected.	cf. Pin①	3.0	3.0

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	9	V
Power Dissipation	TA2029FN	P _D	500
	TA2029N	(Note)	1500
Operating Temperature	T _{opr}	- 25~75	°C
Storage Temperature	T _{stg}	- 55~150	°C

(Note) : Derated above 25°C in the proportion of 4.8 mW/°C for TA2029FN and 12 mW/°C for TA2029N.

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, Ta = 25°C, VCC = 3V, SW2 : OFF, SW3 : OFF, SW7 : OFF

F/E : f = 83 MHz, fm = 1 kHz


FM IF : f = 10.7 MHz, Δf = ±22.5 kHz, fm = 1 kHz

AM : f = 1005 kHz, MOD = 30%, fm = 1 kHz

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Supply Current		I _{CCQ} (FM)	1	Power AMP : OFF	—	11.5	16.0	mA	
		I _{CC} (FM)	1	FM Mode V _{in} = 0 Power AMP : ON SW ₂ : ON, SW ₇ : ON	—	18.0	25.0		
		I _{CCQ} (AM)	1	AM Mode Power AMP : OFF	—	7.5	11.0		
		I _{CC} (AM)	1	V _{in} = 0 Power AMP : ON SW ₂ : ON, SW ₇ : ON	—	17.0	24.0		
F/E	Input Limiting Voltage	V _{in} (lim)	1	- 3 dB Limiting	—	12	—	dB _μ V EMF	
	Quiescent Sensitivity	Q _S		S/N = 30 dB	—	15	—	dB _μ V EMF	
	Local OSC Stop Voltage	V _{stop} (FM)	2	V _{in} = 0	—	1.35	—	V	
	Local OSC Buffer Output Voltage	V _{osc} (buff)	2	f _{osc} = 108 MHz	—	130	—	mV _{rms}	
FM	Input Limiting Voltage	V _{in} (lim) IF	1	- 3 dB Limiting	39	44	49	dB _μ V EMF	
	Recovered Output Voltage	V _{OD}	1	V _{in} = 80 dB _μ V EMF	55	80	110	mV _{rms}	
	Signal To Noise Ratio	S/N	1	V _{in} = 80 dB _μ V EMF	—	70	—	dB	
	Total Harmonic Distortion	THD	1	V _{in} = 80 dB _μ V EMF	—	0.4	—	%	
	AM Rejection Ratio	AMR	1	V _{in} = 80 dB _μ V EMF	—	48	—	dB	
	LED ON Sensitivity	V _L	1	I _L = 1 mA	40	45	50	dB _μ V EMF	
	IF Count Output Frequency	1/8 IF	f ₁ / 8IF (FM)	1	SW ₂ : ON, V _{in} = 80 dB _μ V EMF	1.3373	1.3375	1.3377	MHz
	IF Count Output Voltage	1/8 IF	V ₁ / 8IF (FM)	1	SW ₂ : ON, V _{in} = 80 dB _μ V EMF	110	200	—	mV _{rms}
	IF Count Output Sensitivity		IFSENS (FM)1	1	SW ₆ : 10 kΩ	—	48	—	dB _μ V
			IFSENS (FM)2	1	SW ₆ : 0 Ω	—	68	—	EMF
Pin① Output Resistance		R ₁₁	1	—	—	1	—	kΩ	

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
AM	Gain	G _V	1	V _{in} = 26 dB μ V EMF	20	45	80	mV _{rms}
	Recovered Output Voltage	V _{OD}	1	V _{in} = 60 dB μ V EMF	50	75	100	mV _{rms}
	Signal To Noise Ratio	S/N	1	V _{in} = 60 dB μ V EMF	—	42	—	dB
	Total Harmonic Distortion	THD	1	V _{in} = 60 dB μ V EMF	—	1.0	—	%
	LED ON Sensitivity	V _L	1	I _L = 1 mA	24	29	34	dB μ V EMF
	Local OSC Buff. Output Voltage	V _{osc} (AM)	1	f _{osc} = 1455 kHz	80	140	—	mV _{rms}
	IF Count Output Voltage	V _{IF} (AM)	1	SW ₂ : ON, V _{in} = 60 dB μ V EMF	110	200	—	mV _{rms}
	IF Count Output Sensitivity	IFSENS(AM)1	1	SW ₅ : 10 k Ω	—	29	—	dB μ V EMF
		IFSENS(AM)2		SW ₅ : 0 Ω	—	45	—	
Pin [Ⓜ] Output Resistance	R ₁₂	1	—	—	5	—	k Ω	
PW	Voltage Gain	G _V	1	f = 1 kHz, R _L = 8 Ω , V _O = 0.775 V _{rms} , SW ₇ : ON	27	30	33	dB
	Output Power	P _{O1}	1	f = 1 kHz, R _L = 8 Ω , THD = 10%, SW ₇ : ON	70	100	—	mW
		P _{O2}	1	V _{CC} = 6 V, f = 1 kHz, R _L = 8 Ω , THD = 10%, SW ₇ : ON	350	500	—	
	Total Harmonic Distortion	THD	1	f = 1 kHz, R _L = 8 Ω , P _O = 50 mW, SW ₇ : ON	—	0.6	1.5	%
	Output Noise Voltage	V _{no}	1	R _g = 10 k Ω , R _L = 8 Ω , SW ₇ : ON BPF = 30 Hz~20 kHz	—	0.45	—	mV _{rms}
	Muting Attenuation	ATT	1	V _O = 0.775 V _{rms} SW ₃ : OFF \rightarrow ON, SW ₇ : ON	65	77	—	dB

TEST CIRCUIT 2

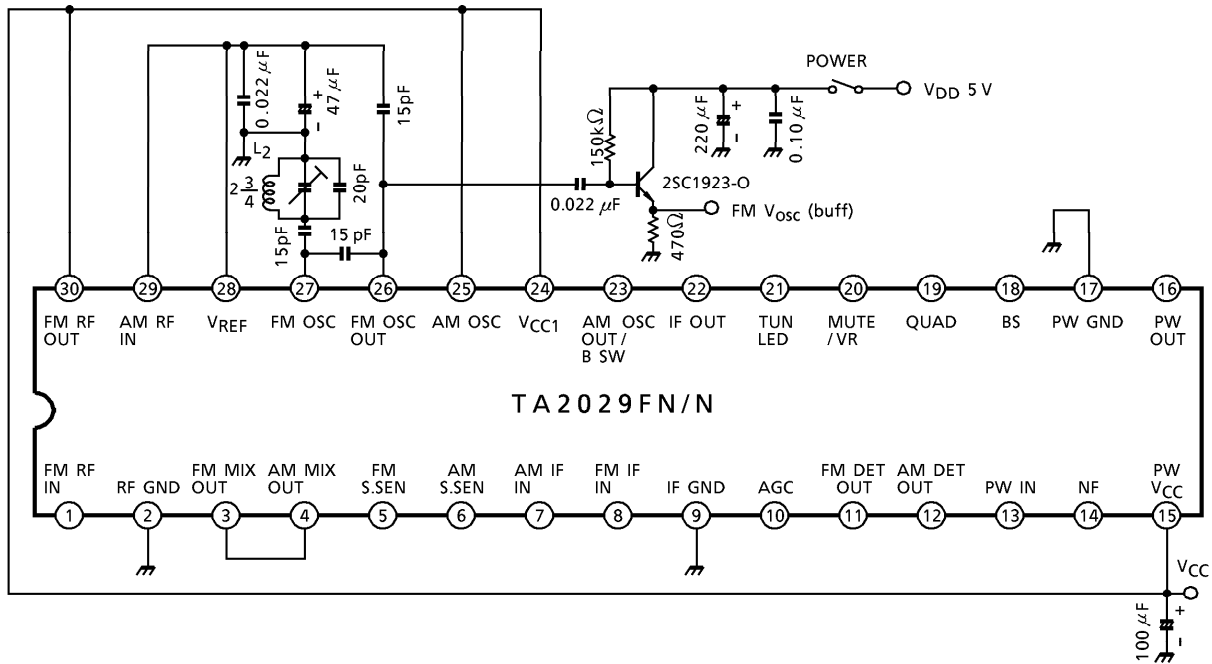


COIL DATA


COIL No.	TEST FREQUENCY	L (μH)	C ₀ (pF)	Q ₀	TURNS					WIRE (mm φ)	REF.
					1-2	2-3	1-3	1-4	4-6		
L ₁ FM RF	100 MHz	—	—	100	—	—	—	2 $\frac{1}{2}$	—	0.5UEW	Ⓢ 53T-037-202
L ₂ FM OSC	100 MHz	—	—	100	—	—	2 $\frac{3}{4}$	—	—	0.5UEW	Ⓢ 0258-244
T ₁ AM OSC	796 kHz	288	—	115	13	73	—	—	—	0.08UEW	Ⓢ 4147-1356-038
T ₂ AM IFT	455 kHz	—	180	120	—	—	180	—	15	0.08UEW	Ⓢ 2150-2162-165

Ⓢ SUMIDA ELECTRIC Co., LTD


L₁ : FM RF




L₂ : FM OSC



T₁ : AM OSC






T₂ : AM IFT



PACKAGE DIMENSIONS
SSOP30-P-300-0.65


Unit : mm

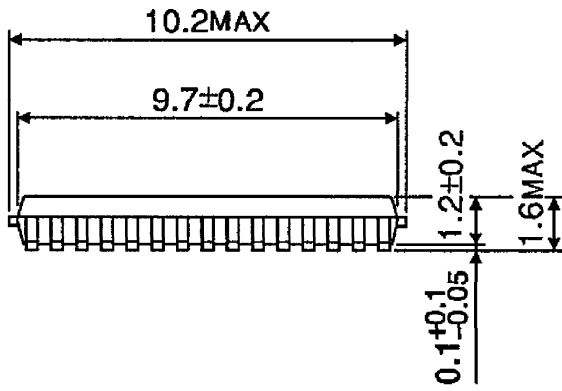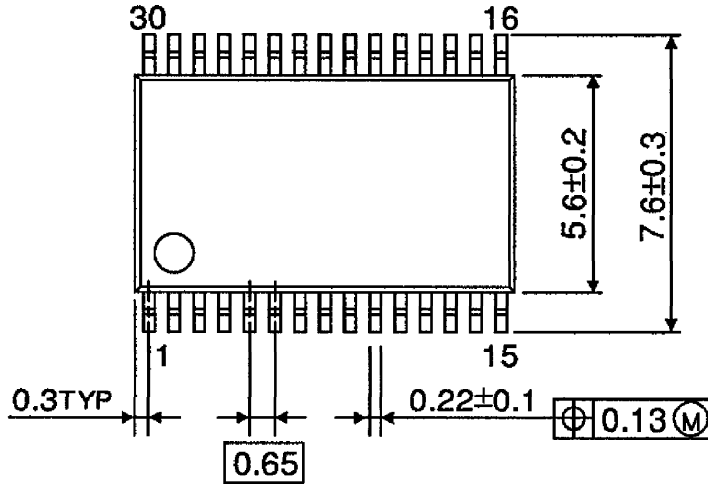

Weight : 0.17 g (Typ.)

PACKAGE DIMENSIONS
SDIP30-P-400-1.78

Unit : mm

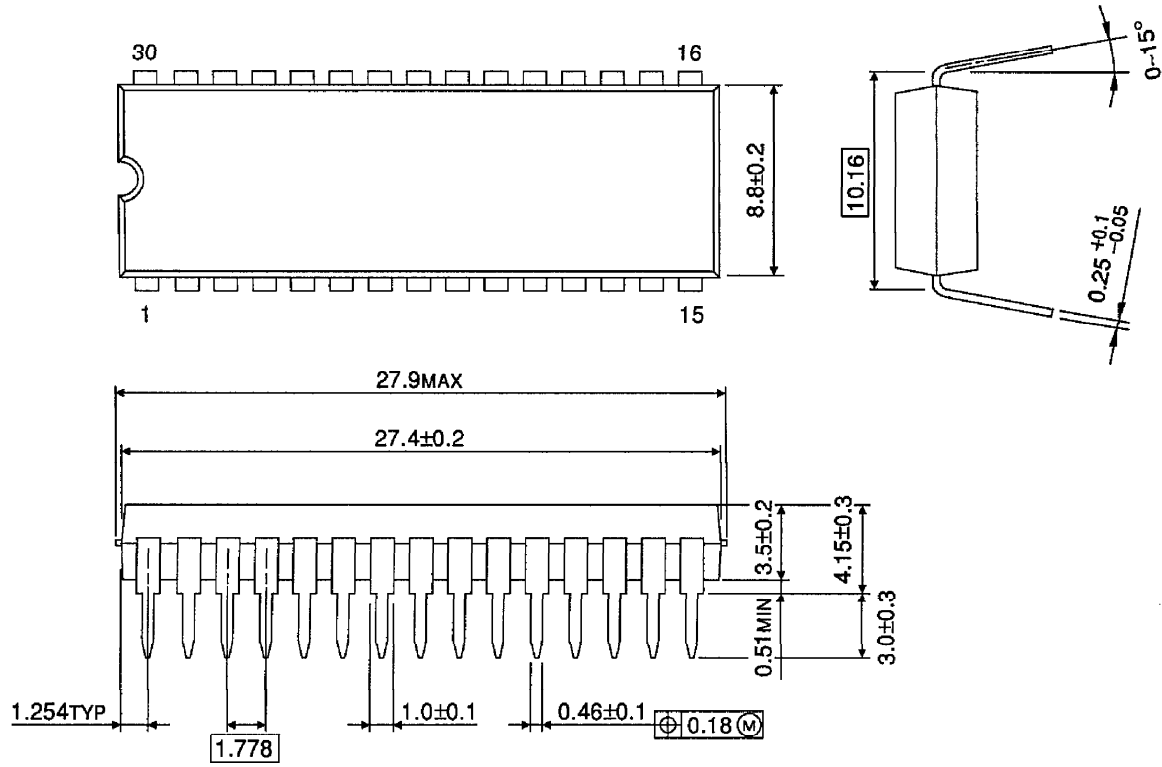

Weight : 2.2 g (Typ.)