

HIGH CURRENT APPLICATION.


FEATURES

- High Voltage : $V_{CEO} = -120V$.
- High Transition Frequency : $f_T = 120MHz$ (Typ.).
- 1W(Monuted on Ceramic Substrate).
- Small Flat Package.
- Complementary to KTC4373.


MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-120	V
Collector-Emitter Voltage	V_{CEO}	-120	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-800	mA
Base Current	I_B	-160	mA
Collector Power Dissipation	P_C	500	mW
	P_{C^*}	1	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ C$

P_{C^*} :KTA1661 mounted on ceramic substrate(250mm²x0.8t)

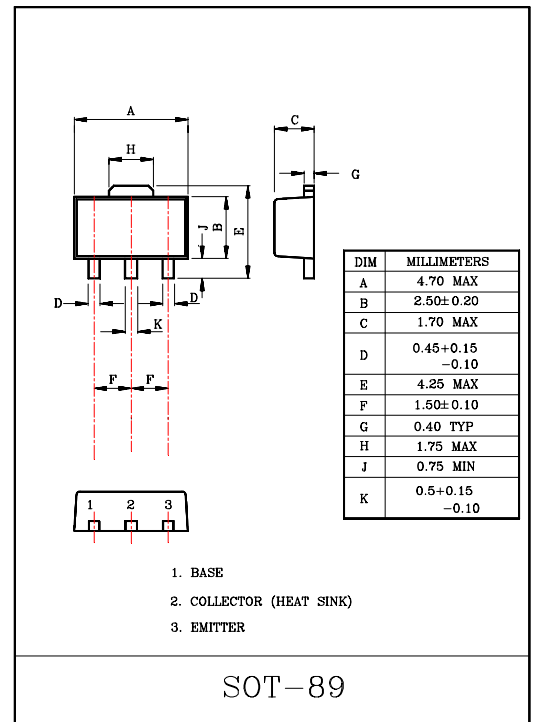

Marking

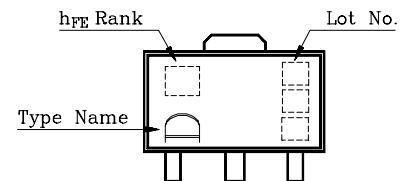

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = -120V, I_E = 0$	-	-	-100	nA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 5V, I_C = 0$	-	-	-100	nA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-120	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -1mA, I_C = 0$	-5.0	-	-	V
DC Current Gain	$h_{FE}(\text{Note})$	$V_{CE} = -5V, I_C = -100mA$	80	-	240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -500mA, I_B = -50mA$	-	-	-1.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = -5V, I_C = -500mA$	-	-	-1.0	V
Transition Frequency	f_T	$V_{CE} = -5V, I_C = -100mA$	-	120	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	-	30	pF

Note : h_{FE} Classification O:80~160 , Y:120~240

