

## 9 WATTS REGULATED DC/DC CONVERTERS

### PWR51XX



#### DESCRIPTION

The PWR5104 and PWR5105 offer respectively  $\pm 12\text{VDC}$  and  $\pm 15\text{VDC}$  outputs of regulated 9W power driven from your +5V system bus. These units are designed for use in such diverse applications as process control, telecommunications, portable equipment, medical systems, airborne and shipboard electronic circuits, and automatic test equipment.

The PWR5104 and PWR5105 offer a low-cost alternative to other models currently on the market. In addition, these models utilize high frequency switching in order to maintain a low EMI and RFI environment. Both models incorporate input and output filtering along with six-sided shielding to keep unwanted noise from your circuit.

Surface-mounted devices and manufacturing processes are used in the PWR5104 and PWR5105 to give you a device that is environmentally rugged. These manufacturing and design technologies also give superior isolation voltage.


#### FEATURES

- LOW COST
- LOW NOISE
- LINEAR OUTPUT REGULATION
- WIDE OPERATING TEMPERATURE RANGE:  $-40^{\circ}\text{C}$  TO  $+100^{\circ}\text{C}$
- $\pm 12\text{VDC}$  AND  $\pm 15\text{VDC}$  OUTPUTS
- INPUT AND OUTPUT FILTERING
- SIX-SIDED SHIELDING
- BARRIER LEAKAGE CURRENT 100% TESTED AT 240VAc

#### APPLICATIONS

- PROCESS CONTROL
- TELECOMMUNICATIONS
- PORTABLE EQUIPMENT
- MEDICAL SYSTEMS
- AIRBORNE AND SHIPBOARD ELECTRONIC CIRCUITS
- AUTOMATIC TEST EQUIPMENT

#### MECHANICAL

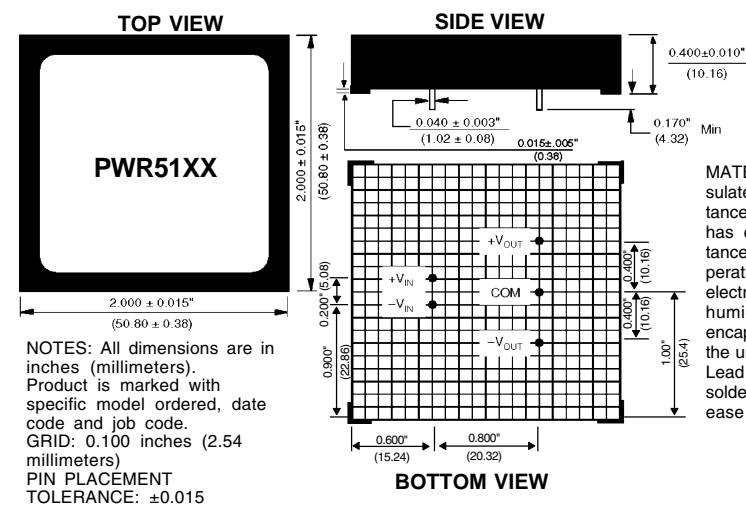

MATERIAL: Units are encapsulated in a low thermal resistance molding compound that has excellent chemical resistance, wide operating temperature range, and good electrical properties under high humidity environments. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is brass with a solder plated surface to allow ease of solderability.

Internet: <http://www.cdpowerelectronics.com>

Power Electronics Division, United States  
3400 E Britannia Drive, Tucson, Arizona 85706  
Phone: 520.295.4100 Fax: 520.770.9369

Power Electronics Division, Europe  
C&D Technologies (Power Electronics) Ltd.  
132 Shannon Industrial Estate, Shannon, Co. Clare, Ireland  
Tel: +353.61.474.133 Fax: +353.61.474.141

# ELECTRICAL SPECIFICATIONS


Specifications typical at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>INPUT</b>					
Nominal Voltage			5		V <sub>DC</sub>
Voltage Range		4.75		5.25	V <sub>DC</sub>
Input Current	No Load		60		mA
	Rated Load		2400	2570	mA
Ripple Current	Rated Load		5		mAp-p
<b>OUTPUT</b>					
PWR5104 Rated Voltage			±12		V <sub>DC</sub>
Rated Current				±375	mA
PWR5105 Rated Voltage			±15		V <sub>DC</sub>
Rated Current				±300	mA
Setpoint Accuracy	Rated Load, Nominal V <sub>IN</sub>		±0.5	±1.0%	%
Voltage Balance			±0.3		%
Temperature Coefficient	-25°C to +85°C		±0.01		%/°C
Ripple and Noise	BW = DC to 10MHz		6	35	mVp-p
Line Regulation			0.02		%
Load Regulation			0.04		%
Efficiency		70	75		%
<b>ISOLATION</b>					
Rated Voltage		750			V <sub>DC</sub>
Test Voltage	60 Hz, 10 Seconds	750			mVp-p
Resistance			10		Ω
Capacitance			50		pF
Leakage Current	240Vrms, 60Hz			15	μArms
<b>GENERAL</b>					
Switching Frequency			50		kHz
Package Weight			50		g
<b>TEMPERATURE</b>					
Specification		-25	+25	+85	°C
Operation		-40		+100	°C
Storage		-55		+125	°C

Note: Other input to output voltages may be available. Please consult factory.

## TYPICAL PERFORMANCE CURVES

Typical at  $T_A = +25^\circ\text{C}$ , nominal input voltage and rated output current unless otherwise noted.

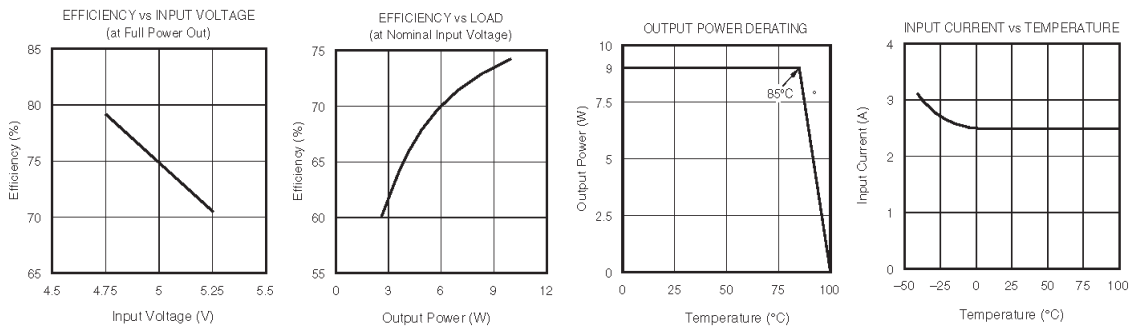

## ABSOLUTE MAXIMUM RATINGS

Input Voltage .....	5.5V <sub>DC</sub>
Output Short Circuit Duration .....	15 seconds
Internal Power Dissipation .....	4W
Lead Temperature (soldering, 10 seconds max) .....	+300°C

## ORDERING INFORMATION

Device Family	<b>PWR</b>	<b>51XX</b>	<b>/H</b>
PWR indicates DC/DC converter			
Model Number			
Selected From Table of Electrical Specifications			
Screening Option			

The information provided herein is believed to be reliable; however, C&D TECHNOLOGIES assumes no responsibility for inaccuracies or omissions. C&D TECHNOLOGIES assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. C&D TECHNOLOGIES does not authorize or warrant any C&D TECHNOLOGIES product for use in life support devices/systems or in aircraft control applications.