


PHASE NOISE (1 Hz BW, typical)

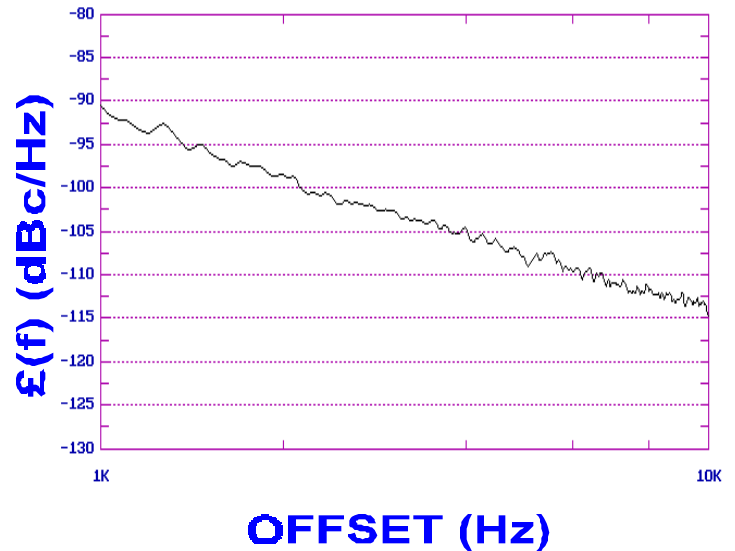

FEATURES

- Frequency Range: 896- 914 MHz
- Tuning Voltage: 0.5-4.5 Vdc
- MINI-14S - Style Package

APPLICATIONS

- WLANs
- Portable Radios
- SMRs

PERFORMANCE SPECIFICATIONS

| | VALUE | UNITS |
|---|-----------|--------|
| Oscillation Frequency Range | 896 - 914 | MHz |
| Phase Noise @ 10 kHz offset (1 Hz BW, typ.) | -115 | dBc/Hz |
| Harmonic Suppression (2nd, typ.) | -25 | dBc |
| Tuning Voltage | 0.5-4.5 | Vdc |
| Tuning Sensitivity (avg.) | 16 | MHz/V |
| Power Output | -5±2 | dBm |
| Load Impedance | 50 | Ω |
| Input Capacitance (max.) | 120 | pF |
| Pushing | <2 | MHz/V |
| Pulling (14 dB Return Loss, Any Phase) | <2 | MHz |
| Operating Temperature Range | -30 to 85 | °C |
| Package Style | MINI-14S | |

POWER SUPPLY REQUIREMENTS

| | | |
|----------------------------|----|-----|
| Supply Voltage (Vcc, nom.) | 5 | Vdc |
| Supply Current (Icc, typ.) | 11 | mA |

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:

