



# **BAS20DW-BAS21DW**


### SURFACE MOUNT LOW LEAKAGE DIODE

#### **Features**

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance
- Lead Free By Design/RoHS Compliant (Note 3)
  - "Green Device" (Note 4)

#### **Mechanical Data**

- Case: SOT-363, Molded Plastic
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Finish Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- BAS20DW Marking: KT2 or KT3 (See Page 3)
- BAS21DW Marking: KT3 (See Page 3)
- Marking & Type Code Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.003 grams (approx.)

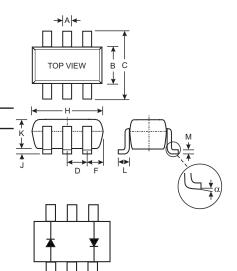

SOT-363									
Dim	Min	Max							
Α	0.10	0.30							
В	1.15	1.35							
С	2.00 2.20								
D	0.65 Nominal								
F	0.30 0.40								
Н	1.80	2.20							
J	_	0.10							
K	0.90	1.00							
L	0.25	0.40							
M	0.10	0.25							
α	0°	8°							
All Dimensions in mm									

## **Maximum Ratings** @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	BAS20DW	BAS21DW	Unit
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	200	250	V
Working Peak Reverse Voltage DC Blocking Voltage	$V_{RWM} \ V_{R}$	150	200	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	106	141	V
Forward Continuous Current	I <sub>FM</sub>	40	00	mA
Average Rectified Output Current	Io	20	00	mA
	= 1.0µs = 1.0s	2. 0.		Α
Repetitive Peak Forward Surge Current	I <sub>FRM</sub>	62	25	mA
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to	+150	°C


# Thermal Characteristics, Total Package @ TA = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit	
Power Dissipation (Note 1)	Pd	200	mW	
Thermal Resistance Junction to Ambient Air (Note 1)	$R_{ heta JA}$	625	°C/W	

#### Electrical Characteristics @ TA = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition	
Reverse Breakdown Voltage (Note 2)	BAS20DW BAS21DW	V <sub>(BR)R</sub>	200 250	_	V	I <sub>R</sub> = 100μA
Forward Voltage (Note 2)		VF	_	1.0 1.25	V	I <sub>F</sub> = 100mA I <sub>F</sub> = 200mA
Reverse Current @ Rated DC Blocking Voltage (Note 2)		I <sub>R</sub>	_	100 15	nA μA	$\begin{array}{ll} T_j = & 25^{\circ}C \\ T_j = & 100^{\circ}C \end{array}$
Total Capacitance		Ст	_	5.0	pF	$V_R = 0$ , $f = 1.0MHz$
Reverse Recovery Time		t <sub>rr</sub>	_	50	ns	$I_F = I_R = 30 \text{mA},$ $I_{rr} = 0.1 \text{ x } I_R, R_L = 100 \Omega$

- Note: 1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
  - 2. Short duration test pulse used to minimize self-heating effect.
  - 3. No purposefully added lead.
  - 4. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead\_free/index.php.

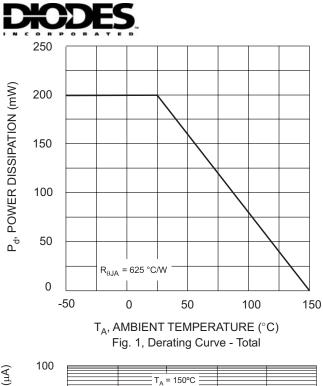



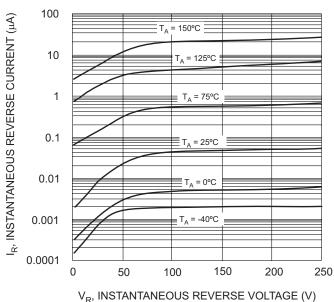


Fig. 3 Typical Reverse Characteristics



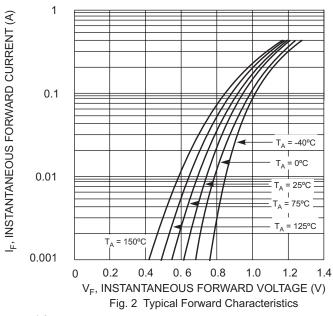

 ${\rm V_R,\,REVERSE\,\,VOLTAGE\,\,(V)}$  Fig. 4 Typical Capacitance vs. Reverse Voltage

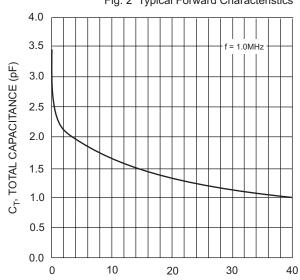


## Ordering Information (Note 5)

Device	Packaging	Shipping		
BAS20DW-7	SOT-363	3000/Tape & Reel		
BAS21DW-7	SOT-363	3000/Tape & Reel		

Notes: 5. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

# **Marking Information**



XXX= Product Type Marking Code (See Page 1)

YM = Date Code Marking Y = Year (ex: S = 2005) M = Month (ex: 9 = September)

Date Code Key

Year	2005 2006		2007	2008	2009	
Code	S	Т	U	V	W	

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	0	N	D

#### **IMPORTANT NOTICE**

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

The products located on our website at **www.diodes.com** are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the express written approval of Diodes Incorporated.