


TYPICAL PERFORMANCE

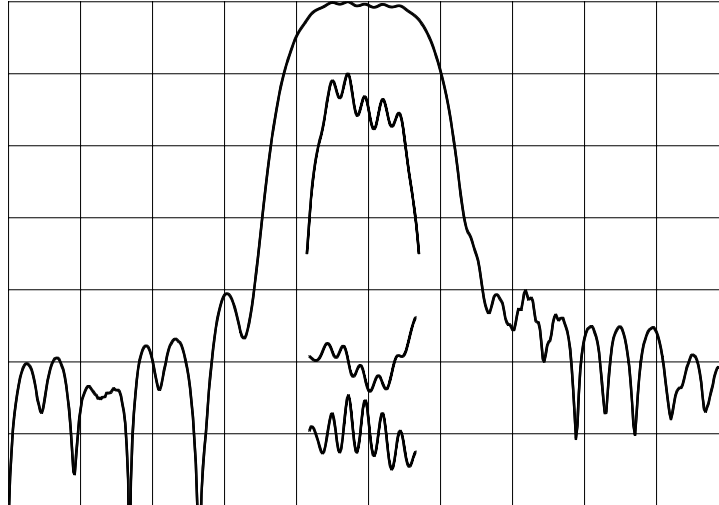


Horizontal: 1 MHz/div Vertical (from top): Magnitude 10.1 dB/div
 Phase Deviation 10 deg/div
 Group Delay Variation 250 ns/div

SPECIFICATION

Parameter	Min	Typ	Max	Units
Center Frequency (Fc) ¹	69.90	70.00	70.10	MHz
Insertion Loss		8.4	8.75	dB
1 dB Bandwidth	1.0	1.35		MHz
3 dB Bandwidth	1.5	1.69		MHz
36 dB Bandwidth		3.1	3.3	MHz
Passband Ripple		0.8	1.0	dB
Phase Deviation from Linear ²		5.7	7.0	deg
Group Delay Variation ²		245	425	ns
Absolute Delay		2.1		μs
Substrate		LiTaO ₃		-
Temperature Coefficient of Frequency (Tc) ³		-23		ppm/°C
Ambient Temperature		25		°C
System Source and Load Impedance		50		Ω

- Notes: 1. Average of lower & upper 3 dB frequencies.
 2. Evaluated over 60% of the 3 dB bandwidth.
 3. Typical change of filter frequency response with temperature is $\Delta f/f_{ref} = (T-T_{ref}) \cdot T_c$ ppm.

PACKAGE OUTLINE

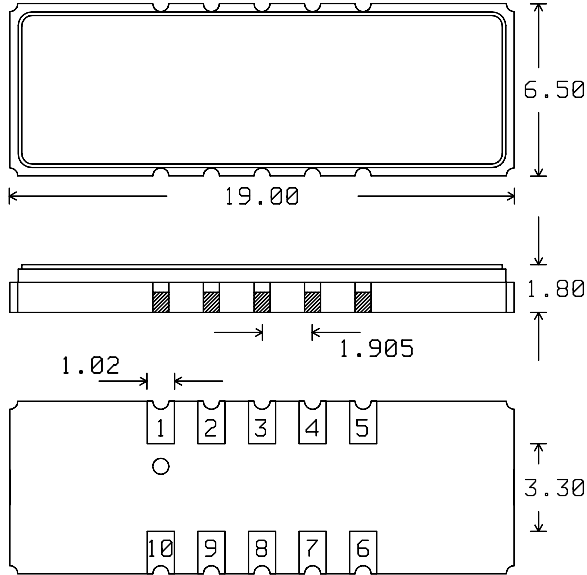


Units: mm

Pin Configuration:

Input: 10
Output: 5
Ground: 1,2,3,4,6,7,8,9

MATCHING CIRCUIT

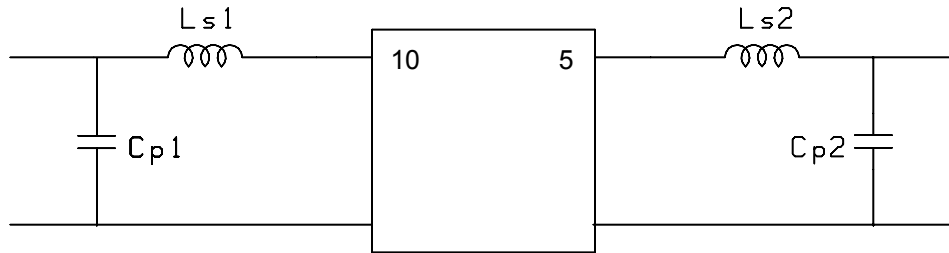

Component values in 50 Ω :
(Minimum Q = 40)

$L_{s1} = 120$ nH	$L_{s2} = 150$ nH
$C_{p1} = 82$ pF	$C_{p2} = 82$ pF

Notes

- Optimum component values may change depending on board layout. The values shown here are intended as a guide only.

