

## *ASSP Mobile Communication Systems*

# SAW Duplexer (700 to 1000 MHz)

## D5CC Series (D1)

### ■ DESCRIPTION

The D5CC series of SAW antenna duplexer apply to the frequency range 700 to 1000 MHz.

The SAW filters are fabricated on a piezoelectric-crystal unit ( $\text{LiTaO}_3$ :lithium tantalate) with a large electromechanical dissociation.


The D5CC series provides small size and light duplexer by using original design, mounting and electrode formation techniques.

D5CC(D1) series are incorporated transmitter filter and receiver filter into a small package and are housed phase circuit in the package. Moreover, I/O of SAW filter is set to impedance  $50\ \Omega$ , so application requires no external circuits.

### ■ FEATURES

- Ultra compact and light package ( $0.14\text{cm}^3$ ,  $9.5 \times 7.5 \times 2.0$  (h) mm Typ.)
- External matching circuits are not required.
- Surface mount package (SMT)
- High handling power resistance (1.2 W Max.)


### ■ PACKAGE

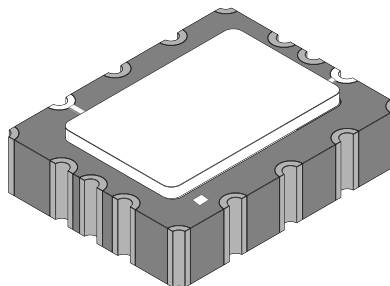


# D5CC Series (D1)

## ■ PIN ASSIGNMENT

(TOP VIEW)

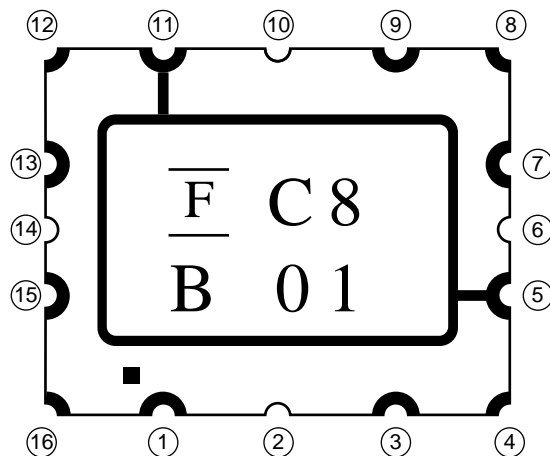

(BOTTOM VIEW)

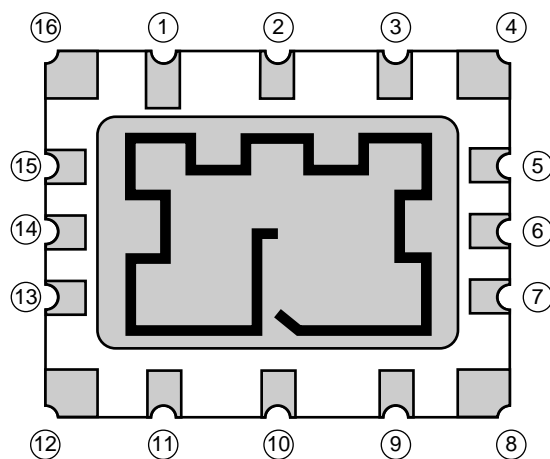

## ■ PIN DESCRIPTION

Pin No.	Pin name	Description
1	GND	Ground Pin
2	ANT	Antenna Pin*
3	GND	Ground Pin
4	GND	Ground Pin
5	GND	Ground Pin
6	Rx	Receiver side Pin
7	GND	Ground Pin
8	GND	Ground Pin
9	GND	Ground Pin
10	ANT	Antenna Pin*
11	GND	Ground Pin
12	GND	Ground Pin
13	GND	Ground Pin
14	Tx	Transmitter side Pin
15	GND	Ground Pin
16	GND	Ground Pin

\* : Only one Antenna pin should be connected.  
The remaining Antenna pin doesnot have to be connected.

# D5CC Series (D1)

## ■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating		Unit
		Min.	Max.	
Operating temperature	Ta	−30	+85	°C
Storage temperature	Tstg	−40	+100	°C
Maximum input power	P <sub>IN</sub>	—	1.2	W
Input DC voltage	—	−5	+5	V

WARNING: Piezoelectric devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

## ■ RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value		Unit
		Min.	Max.	
Operating temperature	Ta	−30	+85	°C

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the piezoelectric device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use piezoelectric devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

## ■ STANDARD FREQUENCIES

System	Tx freq. (MHz)	Rx freq. (MHz)	Part number	Part symbol	Remarks
AMPS/IS-95/IS-136	824 to 849	869 to 894	FAR-D5CC-881M50-D1C8	C8	

# D5CC Series (D1)

## ■ ELECTRICAL CHARACTERISTICS

AMPS/IS-136/IS-95



### 1. Part number : FAR-D5CC-881M50-D1C8

(Ta = -30 °C to +85 °C)


Parameter		Condition	Value			Unit	Remarks
			Min.	Typ.	Max.		
Tx → Antenna	Insertion Loss	824 to 849 MHz	—	2.0	2.5	dB	+15 to +35 °C
			—	—	2.7	dB	−30 to +85 °C
	Inband Ripple	824 to 849 MHz	—	1.0	1.5	dB	
	VSWR (Return loss)	842 to 849 MHz	— (7.4)	1.8 (10.9)	2.5 (—)	— (dB)	
	Absolute Attenuation	779 to 804 MHz	12	17	—	dB	
		869 to 894 MHz	40	46	—	dB	
		1648 to 1698 MHz	6	9	—	dB	
		2472 to 2547 MHz	6	8	—	dB	
Antenna → Rx	Insertion Loss	869 to 894 MHz	—	3.8	4.3	dB	
	Inband Ripple	869 to 894 MHz	—	1.5	2.5	dB	
	VSWR (Return loss)	869 to 894 MHz	— (6.8)	2.3 (8.1)	2.7 (—)	— (dB)	
	Absolute Attenuation	824 to 849 MHz	50	55	—	dB	
		930 to 1200 MHz	40	43	—	dB	
		1200 to 1500 MHz	40	43	—	dB	
		1500 to 1800MHz	40	45	—	dB	
	Tx → Rx	Absolute Attenuation (Isolation)	824 to 849 MHz	53	55	—	dB
869 to 894 MHz			46	49	—	dB	+15 to +85 °C
			43	—	—	dB	−30 to +15 °C
Maximum Input Power		Ta = +50 °C	1.2 W (continuous wave > 50000 h)				

# D5CC Series (D1)

## • Typical Characteristics

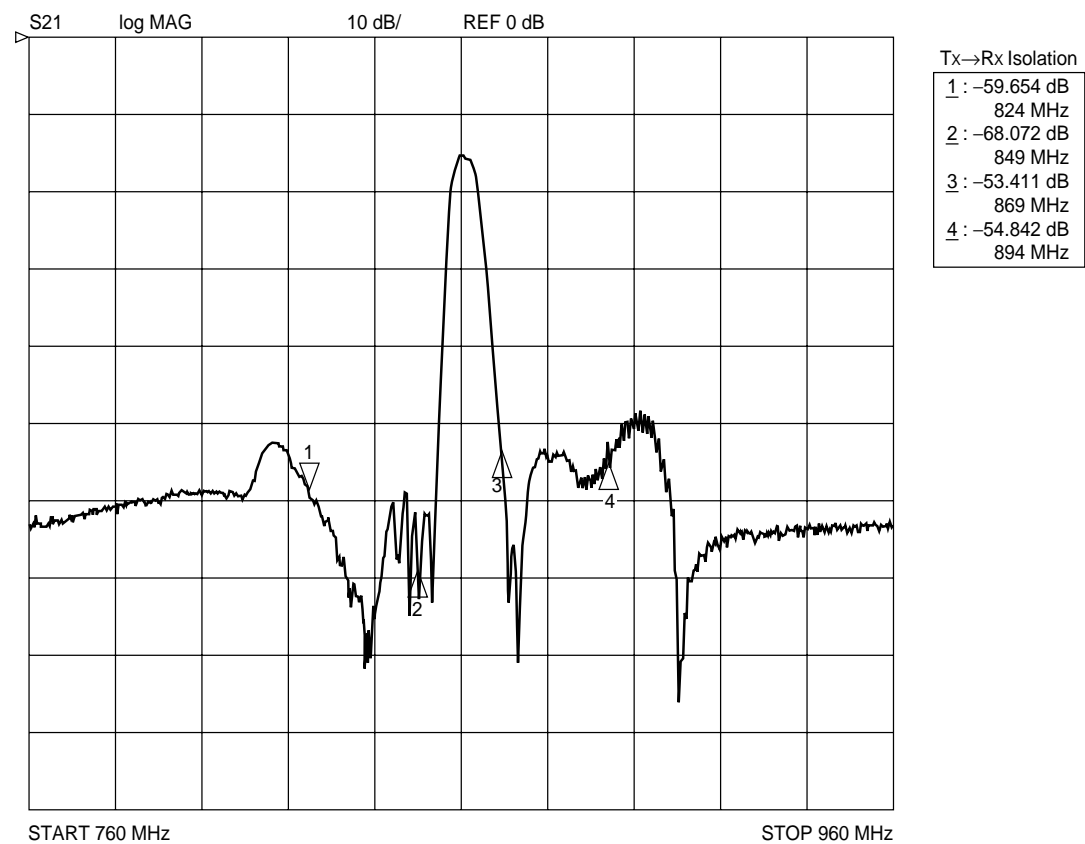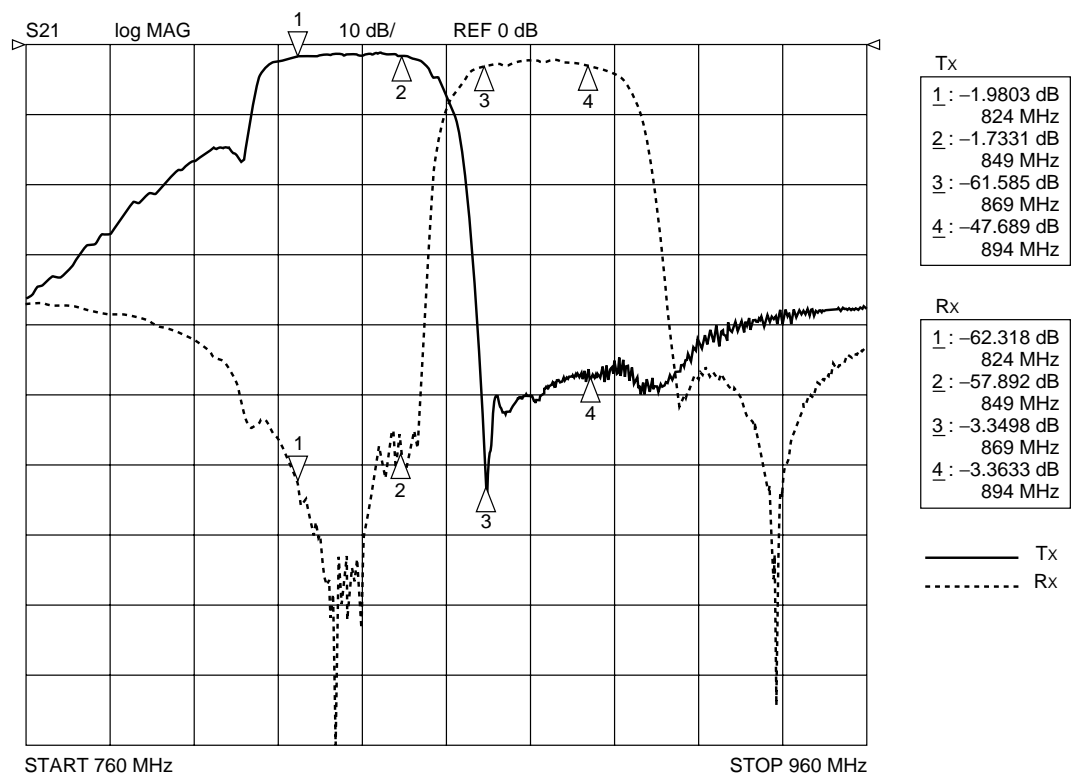


# D5CC Series (D1)

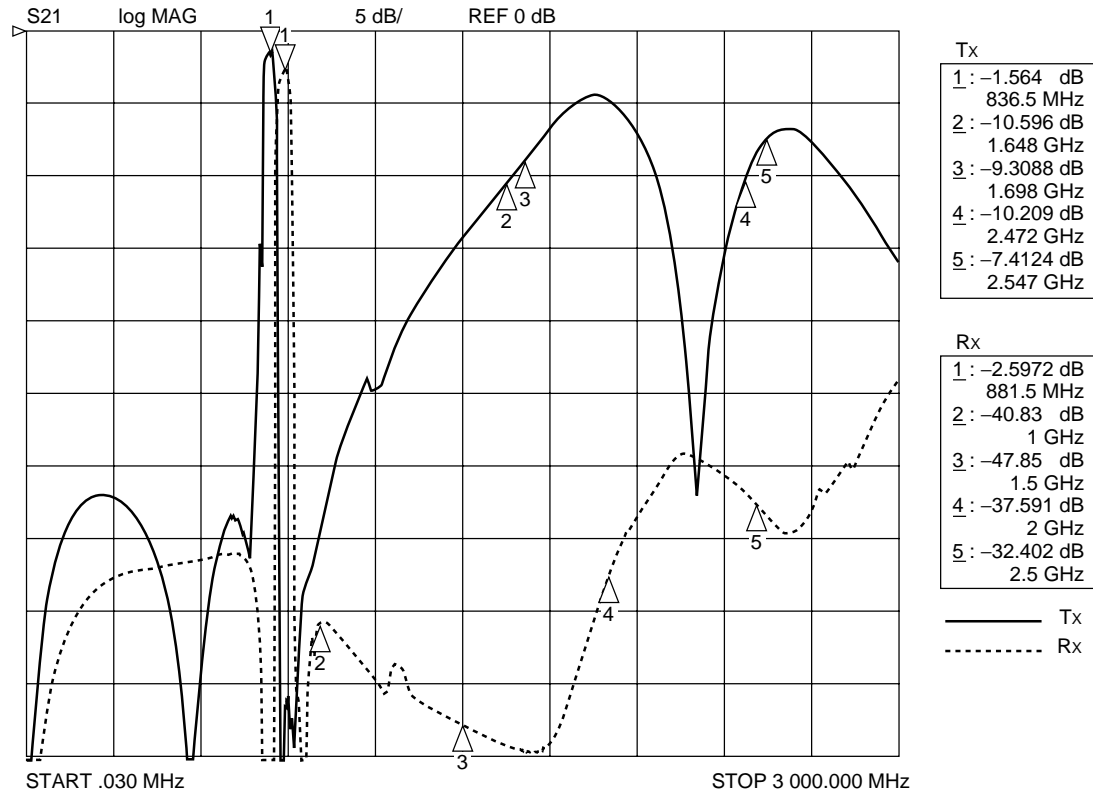

# D5CC Series (D1)

## MEASUREMENT CIRCUIT

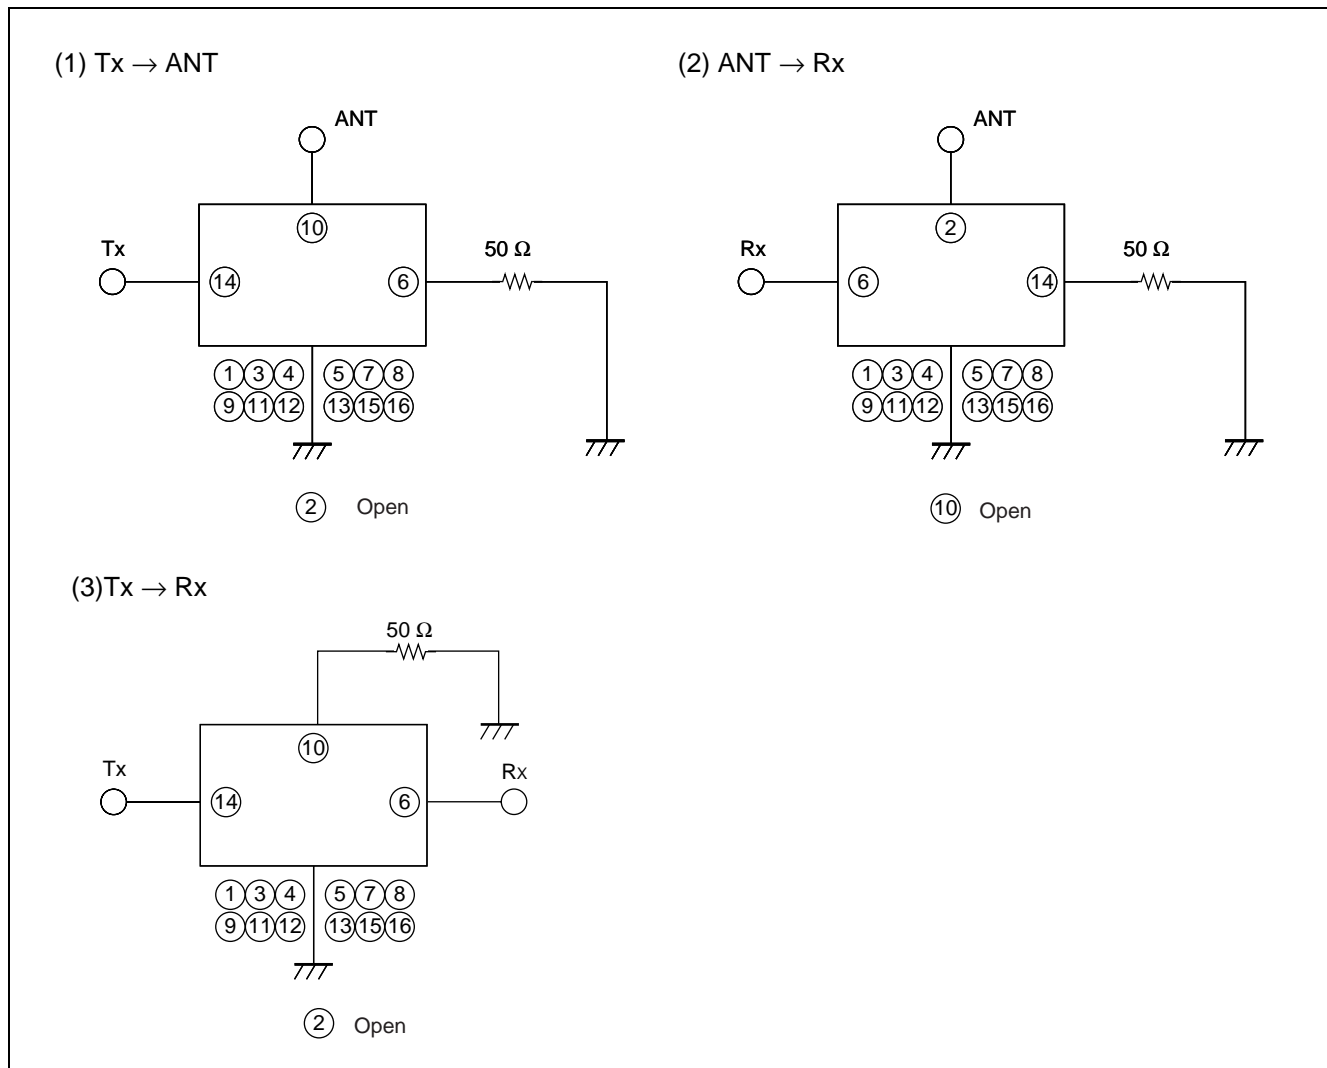

## PART NUMBER DESIGNATION

[Designation example]

FAR-D5CC- □□□□□□ -D1 □□ - □  
 (1) (2) (3)

(1) Frequency : Specify the nominal center frequency of higher frequency side in six alphanumeric.  
 Enter M (for MHz) at the decimal point. Refer to below example.

[Example] 881.5 MHz → 881M50


(2) Part symbol : Specified characters from A1 to Z9.

(3) Packing : T : 1 k pcs/reel

Q : 2 k pcs/reel




## ■ MARKING

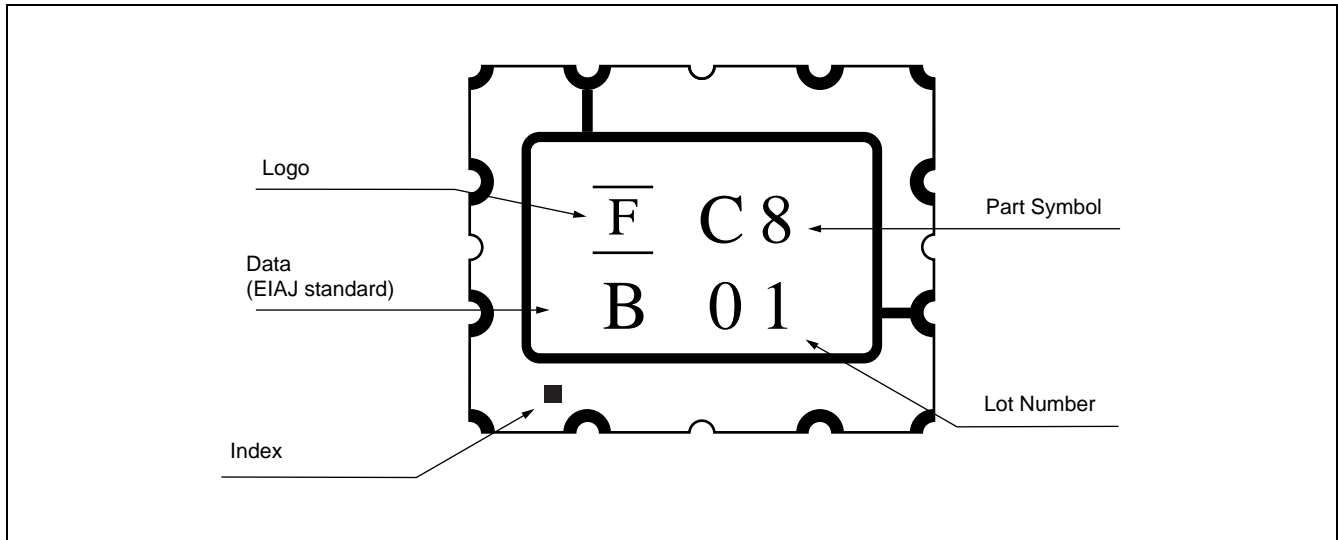


# D5CC Series (D1)

## ■ PACKAGE DIMENSION

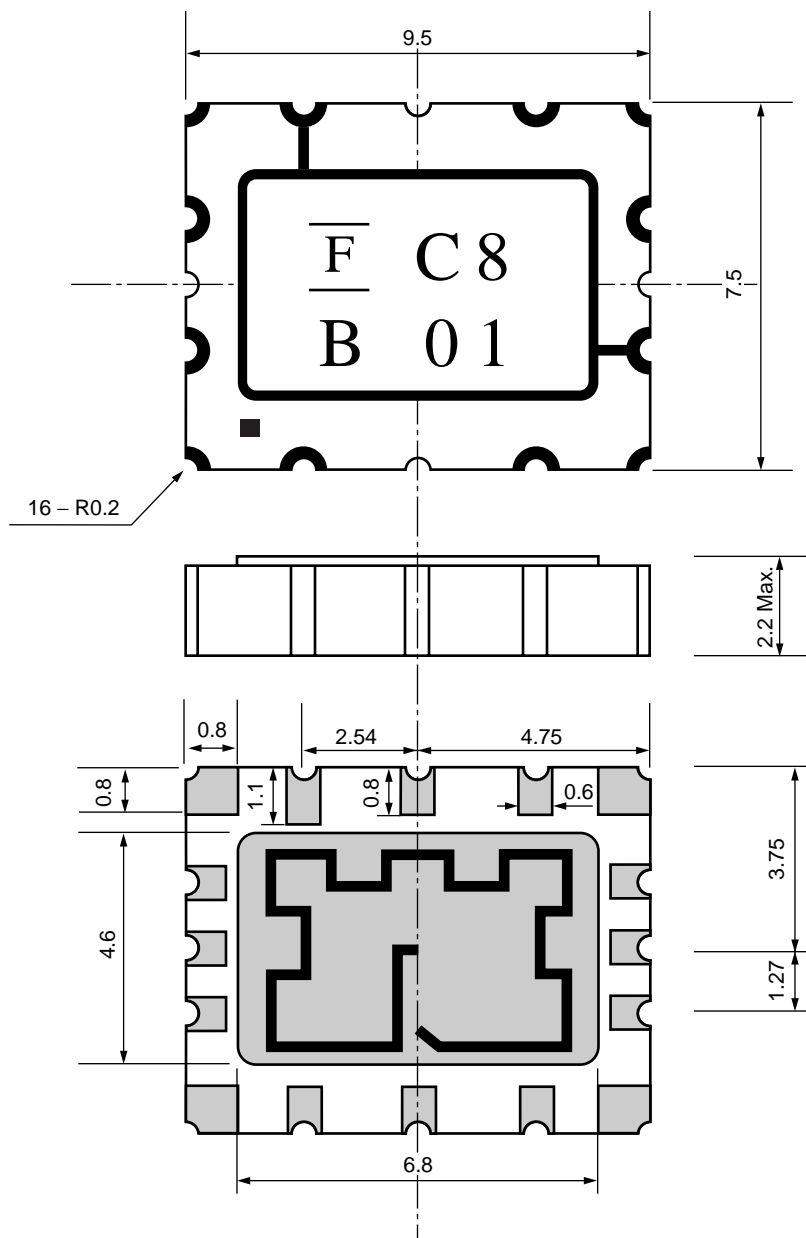

Dimensions in mm.

## RECOMMENDED LAND PATTERN

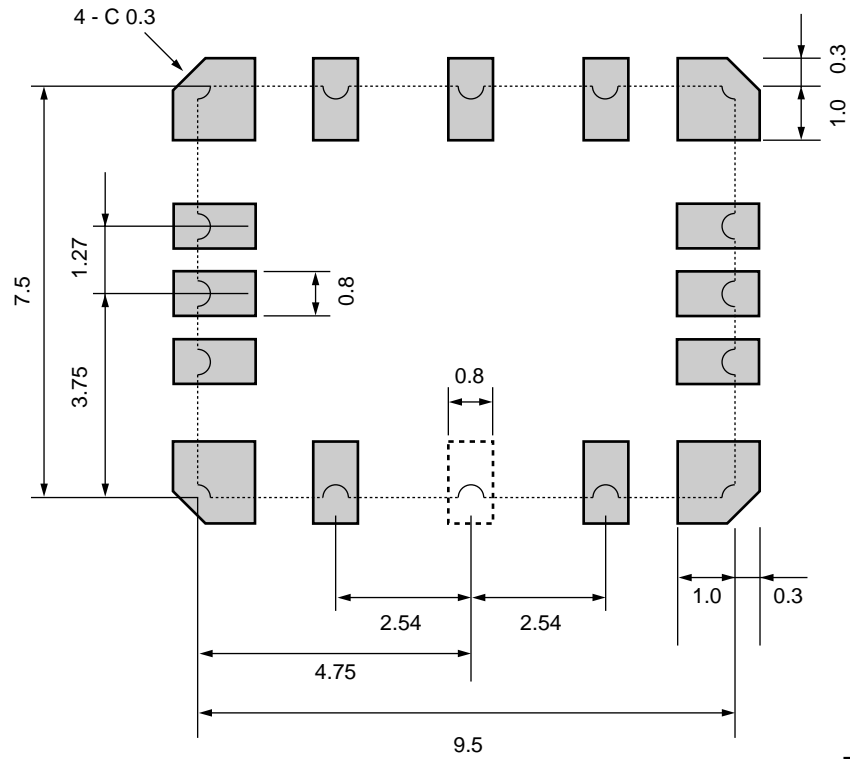


Dimensions in mm.

Note : Only one Antenna pin should be connected.  
The remaining Antenna pin does not have to be connected.

# D5CC Series (D1)

## ■ PACKING : Reel type


### (1) Reel Dimensions

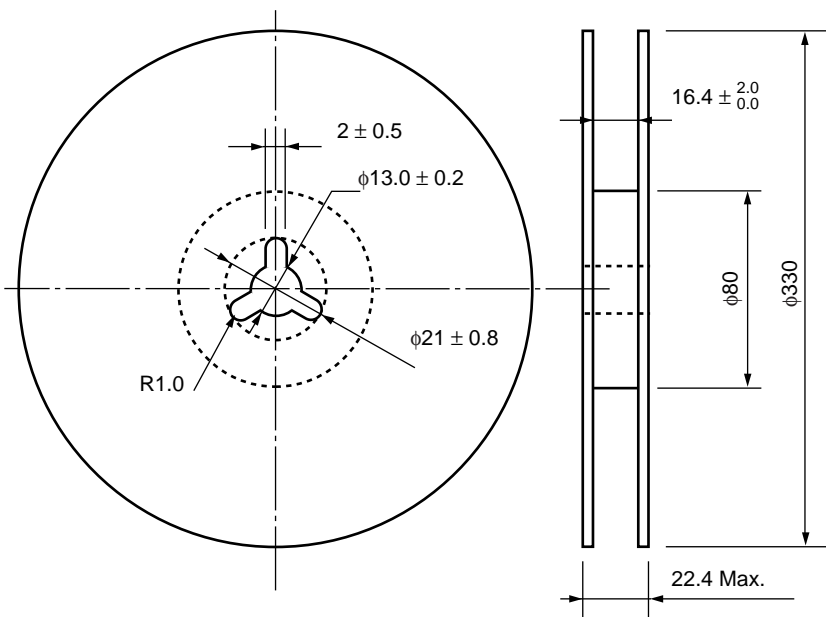


Type	A	Volume
-T	$\phi 330$	1 k pcs
-Q	$\phi 330$	2 k pcs

Dimensions in mm.

### (2) Packing Style

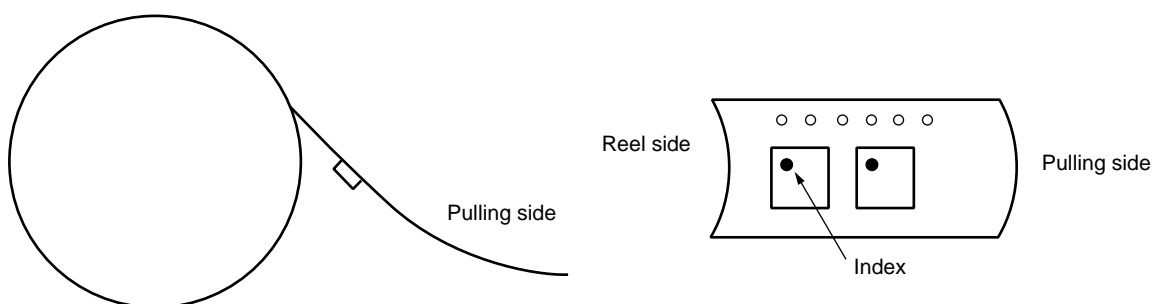


## (3) Tape Dimensions

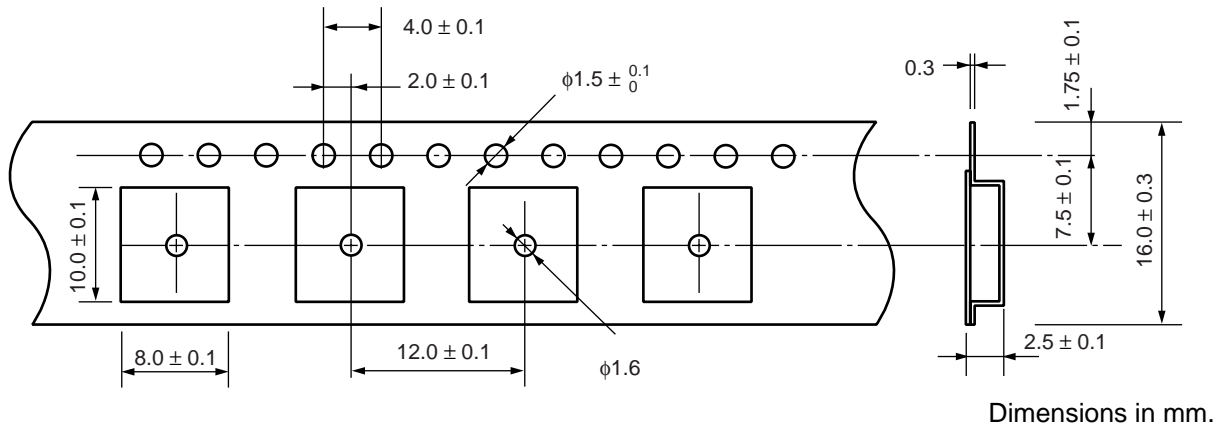


## (4) Peel strength of top cover tape

Peel off by the force of 0.1 N to 0.7 N  
under the condition at the right.  
(Conforms to JIS C 0806 section 5.2)

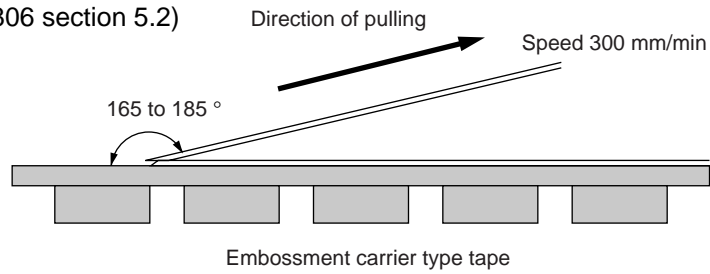

# D5CC Series (D1)

## ■ RECOMMENDED REFLOW PROFILE

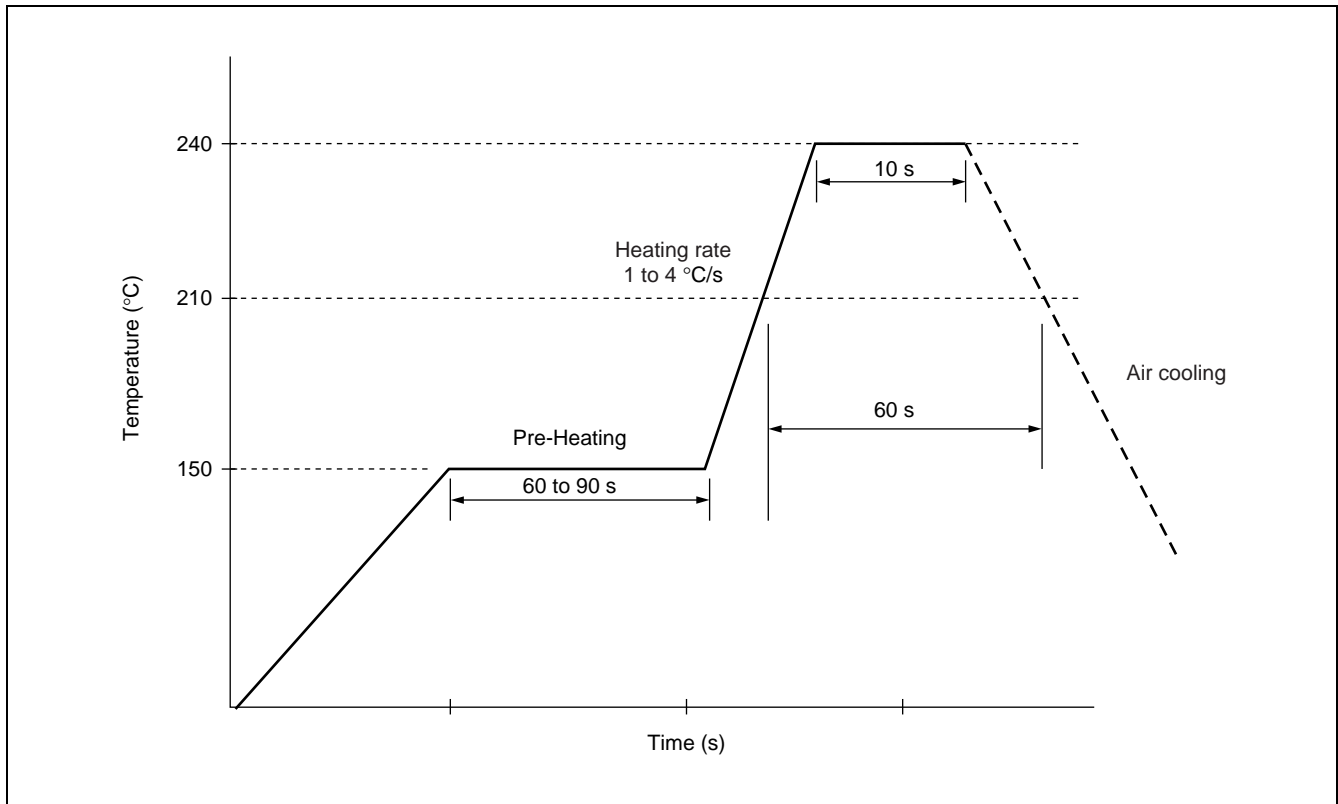

## ■ NOTE

Mass-produced product order is accepted by a unit of 1000.

# D5CC Series (D1)

## FUJITSU MEDIA DEVICES LIMITED

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU MEDIA DEVICES sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU MEDIA DEVICES is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

The products described in this document are designed, and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any electronic devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.

F0010

© FUJITSU LIMITED Printed in Japan