

ADJUSTABLE LOW DROPOUT VOLTAGE REGULATOR


■ GENERAL DESCRIPTION

The NJM2887 is an adjustable low dropout voltage regulator with ON/OFF control.


Advanced Bipolar technology achieves low noise, high ripple rejection and low quiescent current.

It is suitable for DVD, FAX and Car Audio.

■ PACKAGE OUTLINE



NJM2887DL2




NJM2887DL3


■ FEATURES

- High Ripple Rejection 75dB typ. (f=1kHz, V_o=3V Version)
- Output Noise Voltage V_{no}=50μV_{rms} typ.
- Output capacitor with 2.2μF ceramic capacitor
- Output Current I_o(max.)=500mA
- High Precision Output V_{ref}=1.29V±1.0%
- Low Dropout Voltage 0.18V typ. (I_o=300mA)
- ON/OFF Control
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline TO-252-5(DL2,DL3)

■ PIN CONFIGURATION




NJM2887DL2



NJM2887DL3

PIN FUNCTION
 1.CONTROL
 2. V_{IN}
 3.GND
 4.V_{OUT}
 5.V_{ADJ}

■ EQUIVALENT CIRCUIT

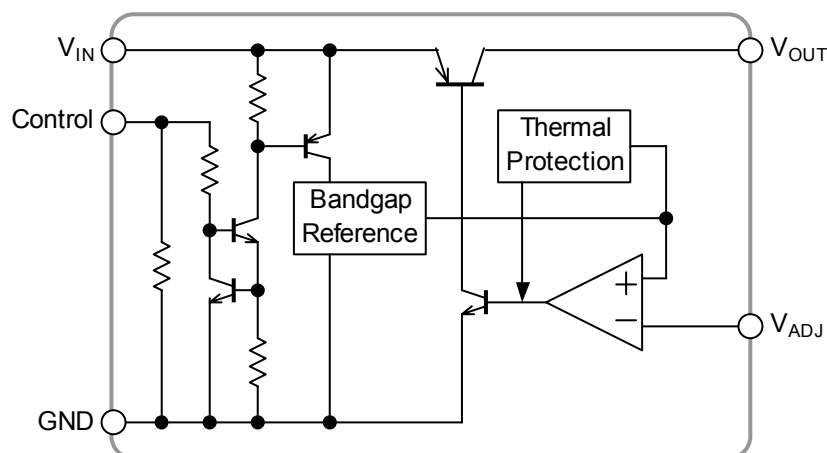

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	+14	V
Control Voltage	V_{CONT}	+14(*1)	V
Output Adjust Voltage	V_{ADJ}	+4	V
Power Dissipation	P_D	8(Tc=25°C) 0.8(Ta≤25°C)	W
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(*1): When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.


■ ELECTRICAL CHARACTERISTICS

($V_{IN}=V_o+1V$, $R_1=100k\Omega$, $C_{IN}=0.33\mu F$, $C_o=2.2\mu F:V_o$ ($C_o=4.7\mu F: V_o\leq 2.6V$), Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_o	$I_o=30mA$	1.5	—	6	V
Reference Voltage	V_{ref}	$I_o=30mA$	1.277	1.29	1.303	V
Quiescent Current	I_Q	$I_o=0mA, V_o=3.0V$	—	200	300	μA
Quiescent Current at Control OFF	$I_{Q(OFF)}$	$V_{CONT}=0V$	—	—	100	nA
Output Current	I_o	$V_o-0.3V$	500	650	—	mA
Line Regulation	$\Delta V_o/\Delta V_{IN}$	$V_{IN}=V_o+1V \sim V_o+6.0V$, $I_o=30mA$	—	—	0.10	%/V
Load Regulation	$\Delta V_o/\Delta I_o$	$I_o=0 \sim 500mA$	—	—	0.03	%/mA
Dropout Voltage(*2)	ΔV_{LO}	$I_o=300mA$	—	0.18	0.28	V
Ripple Rejection	RR	$e_{in}=200mV_{rms}$, $f=1kHz$, $I_o=10mA$ $V_o=3.0V$ Version	—	70	—	dB
Average Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T_a$	$T_a=0-85^\circ C$, $I_o=10mA$	—	± 50	—	ppm/°C
Output Noise Voltage	V_{NO}	$f=10Hz-80kHz$, $I_o=10mA$, $V_o=3.0V$ Version	—	50	—	μV_{rms}
Control Voltage for ON-state	$V_{CONT(ON)}$		1.6	—	—	V
Control Voltage for OFF-state	$V_{CONT(OFF)}$		—	—	0.6	V

(*2): Except output voltage less than 2.1V.

POWER DISSIPATION VS. AMBIENT TEMPERATURE

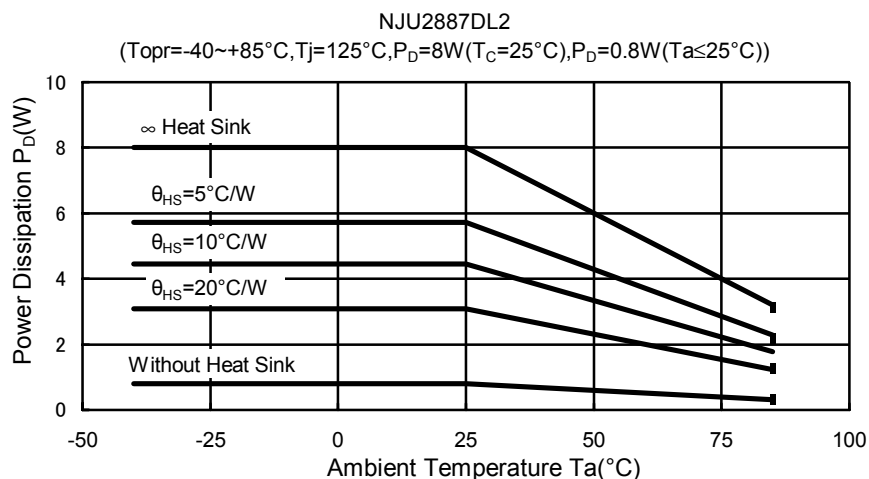

TEST CIRCUIT

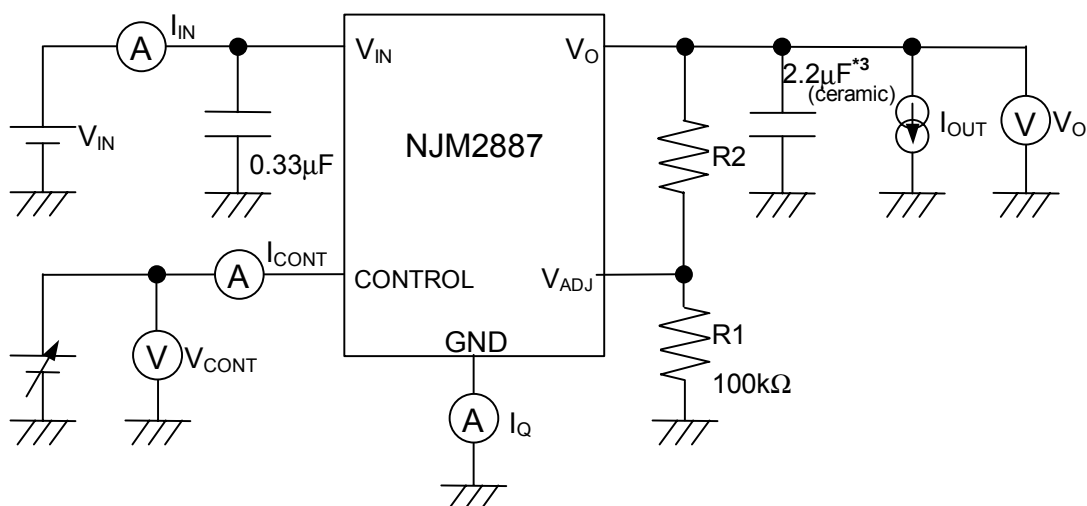


*3 $V_O \leq 2.6\text{V}$ version: $C_o = 4.7\mu\text{F}$ (ceramic)

The ceramic capacitor used by the output recommend the B characteristic.

NJM2887

■ TYPICAL APPLICATION

① In the case where ON/OFF Control is not required:

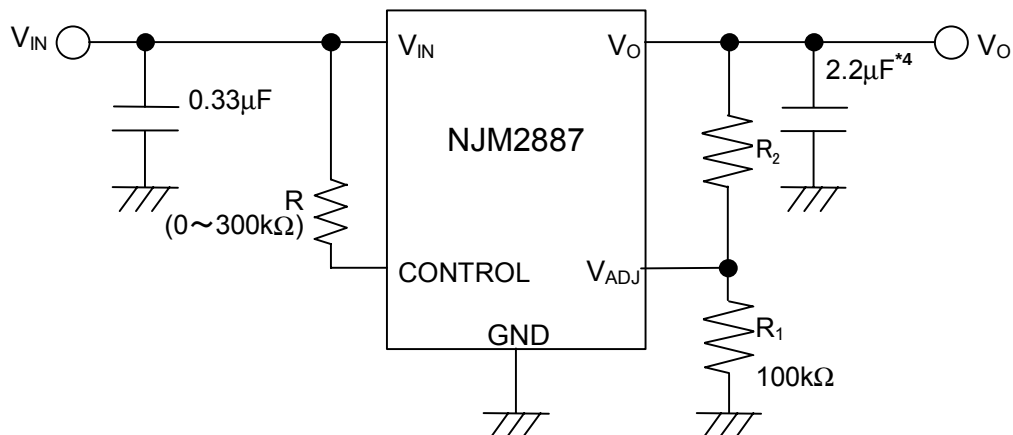


*4 $V_O \leq 2.6V$ version: $C_O = 4.7\mu F$

Connect control terminal to V_{IN} terminal

The quiescent current can be reduced by using a resistance “R”. Instead, it increases the minimum operating voltage. For further information, please refer to Figure “Output Voltage vs. Control Voltage”.

② In use of ON/OFF CONTROL:

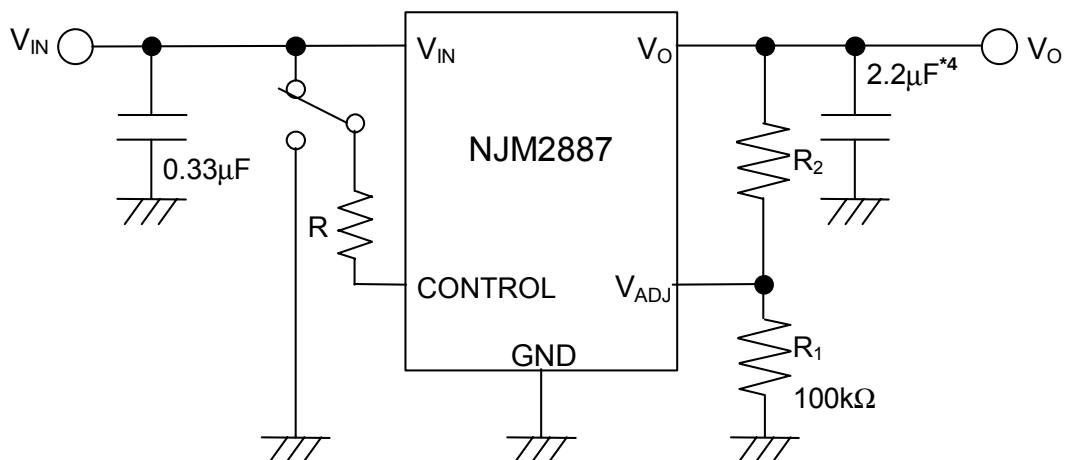


*4 $V_O \leq 2.6V$ version: $C_O = 4.7\mu F$

State of control terminal:

- “H” → output is enabled.
- “L” or “open” → output is disabled.

③ Reduction of output noise voltage:

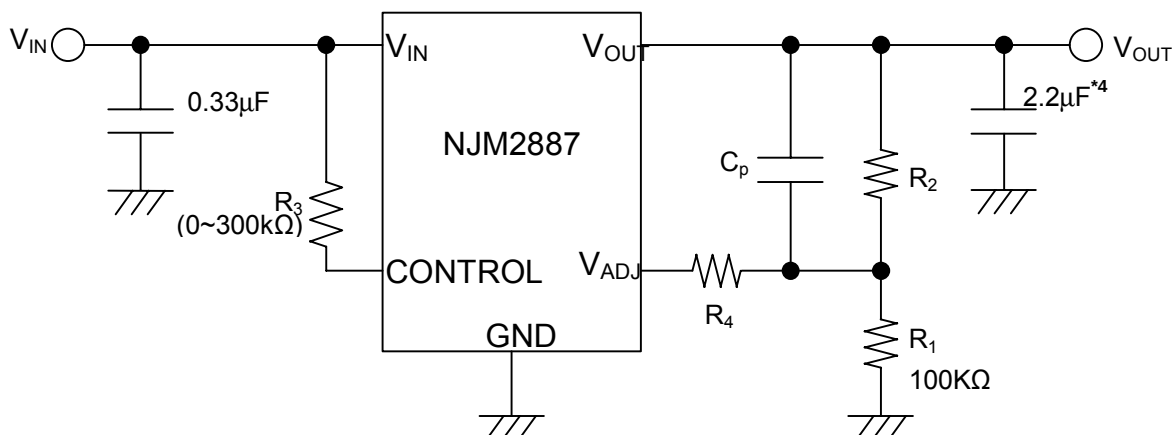

*4 $V_o \leq 2.6V$ version: $C_o = 4.7\mu F$







Output feedback resistance: R_1 , should connect near V_{ADJ} terminal.

For reduce output noise voltage, connect C_p and R_4 refer to the following table.







The example of use of C_p and R_4

Output capacity value	$R_1 = 10k\Omega$	$R_1 = 1k\Omega$	$R_1 = 100\Omega$	R_4
$C_o = 2.2\mu F$	$C_p = 100pF$	$C_p = 1nF$	$C_p = 0.01\mu F$	10k Ω or less
$C_o = 4.7\mu F$	$C_p = 680pF$	$C_p = 6.8nF$	$C_p = 0.068\mu F$	







ELECTRICAL CHARACTERISTICS

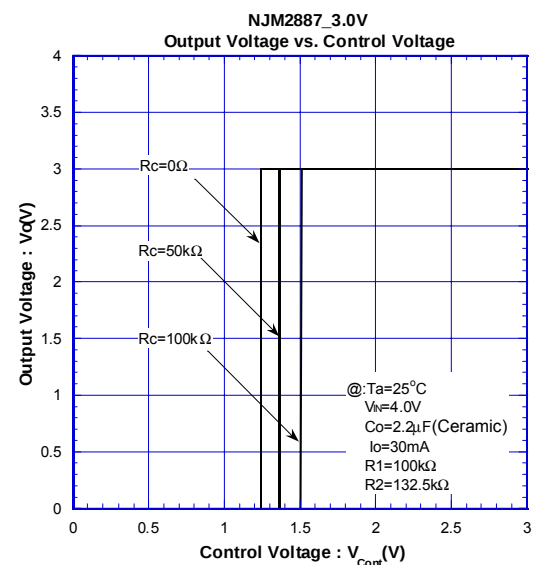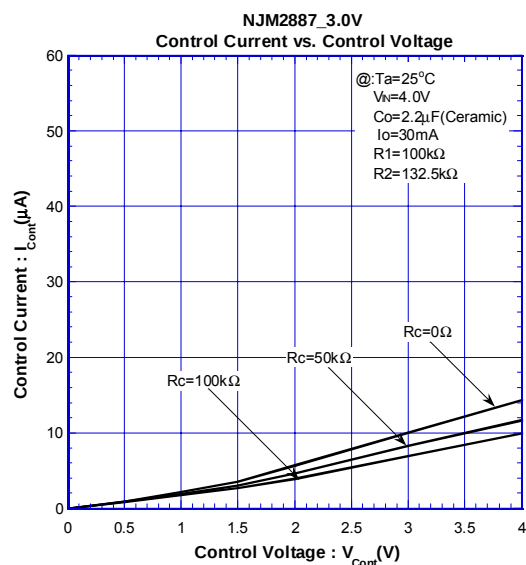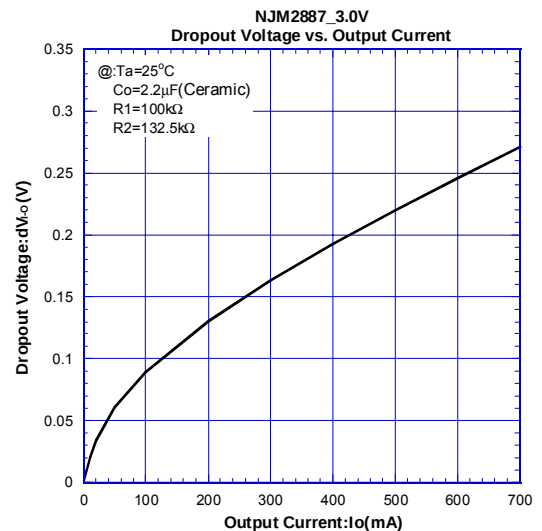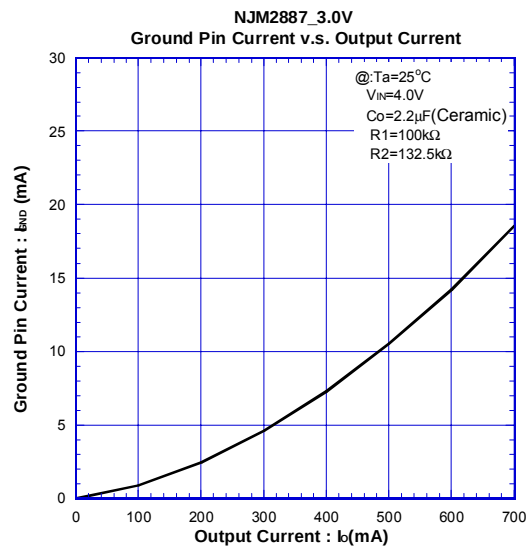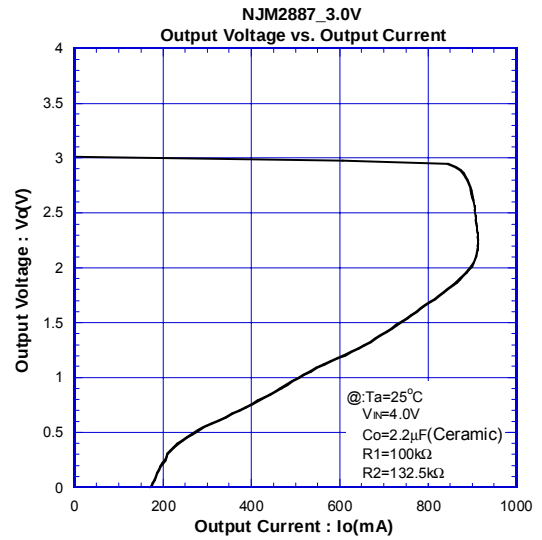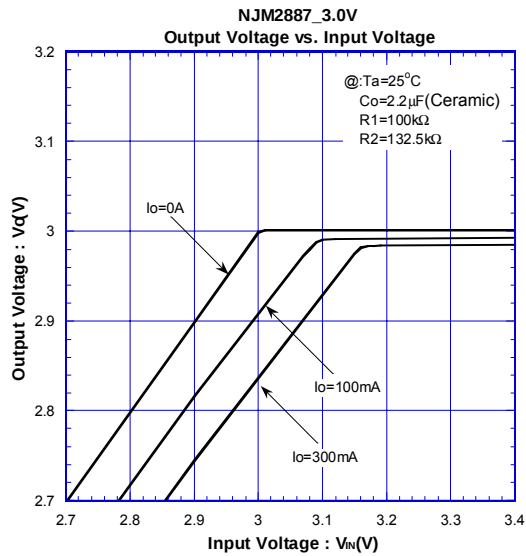







ELECTRICAL CHARACTERISTICS

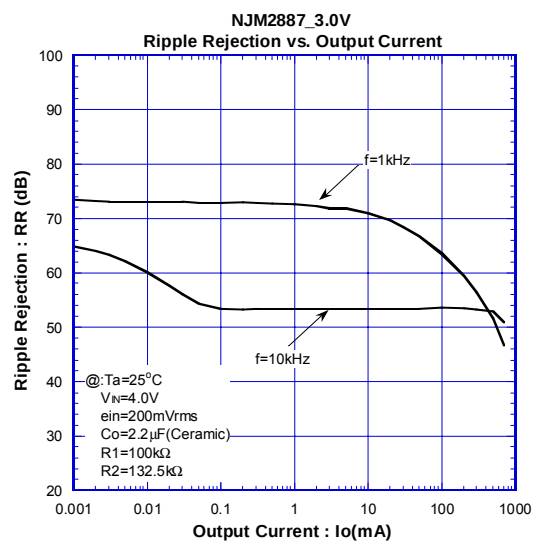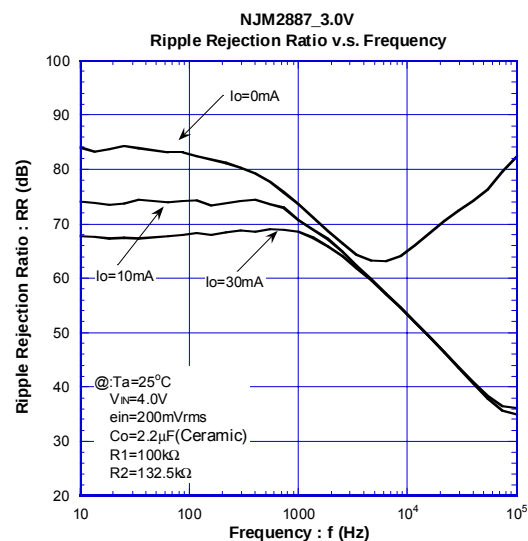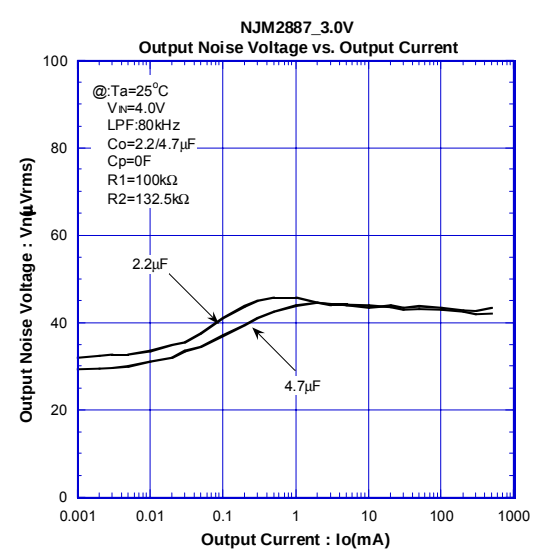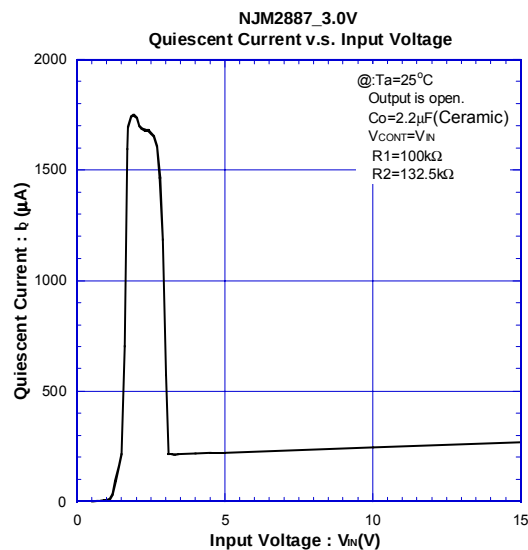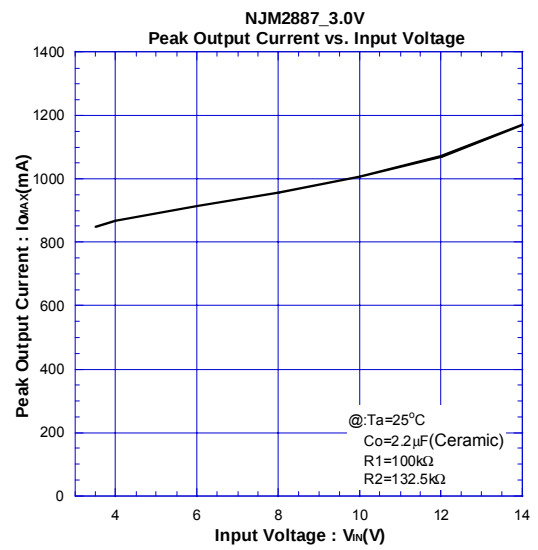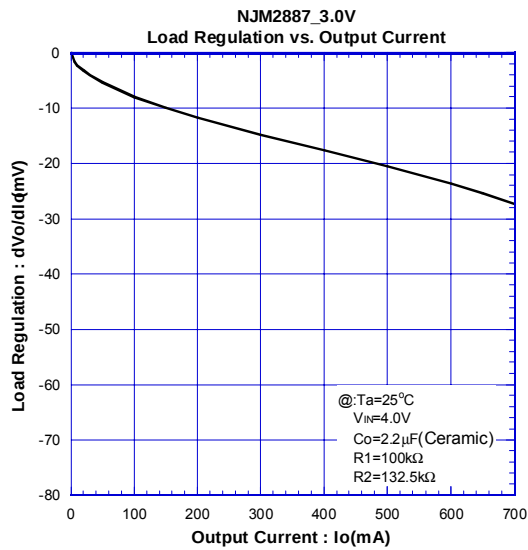



ELECTRICAL CHARACTERISTICS

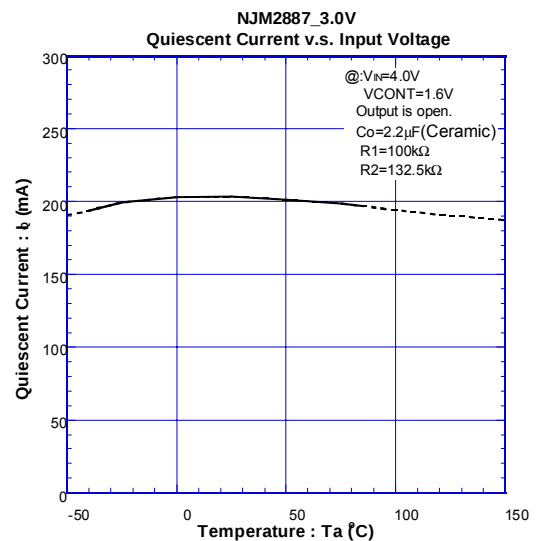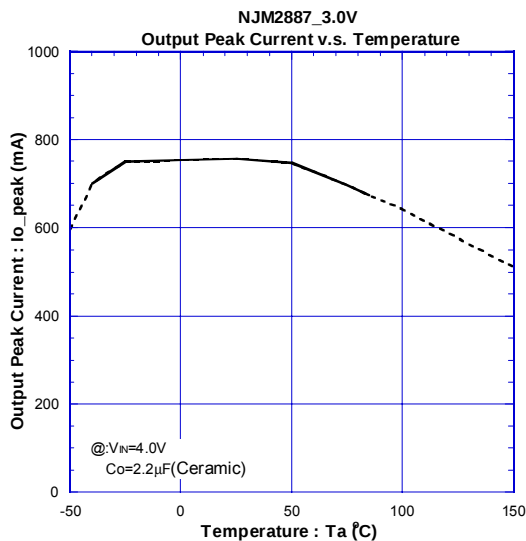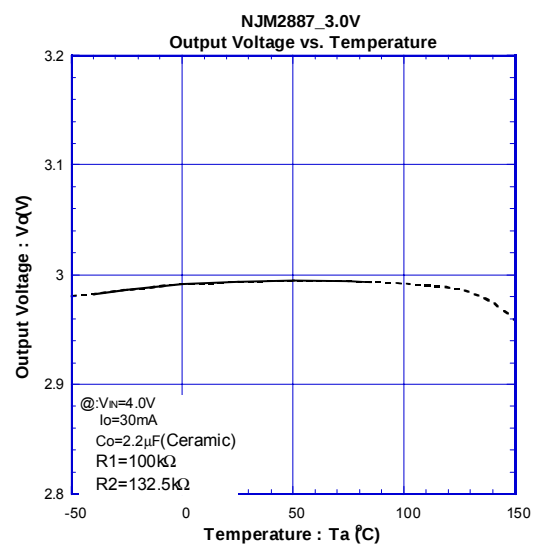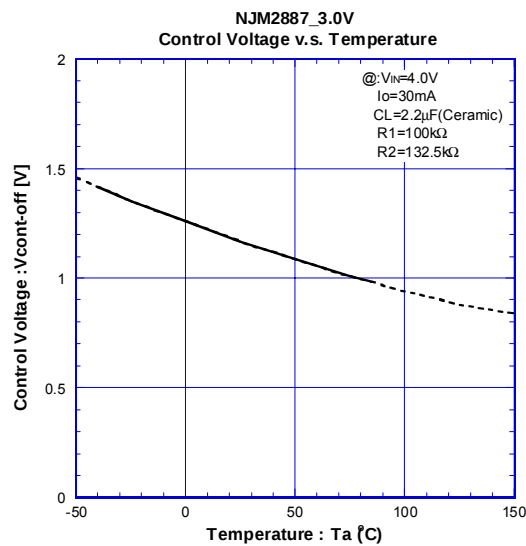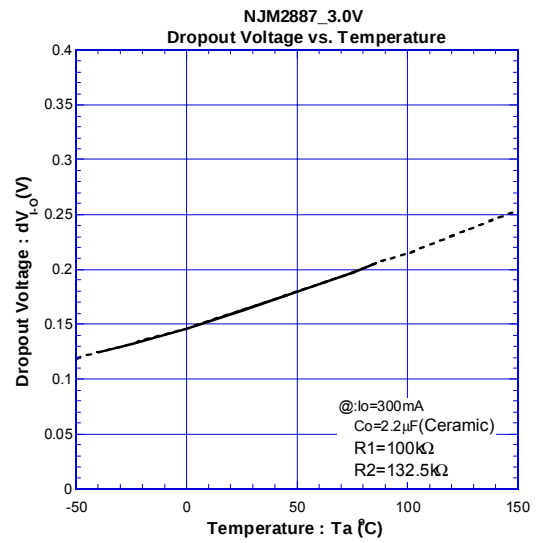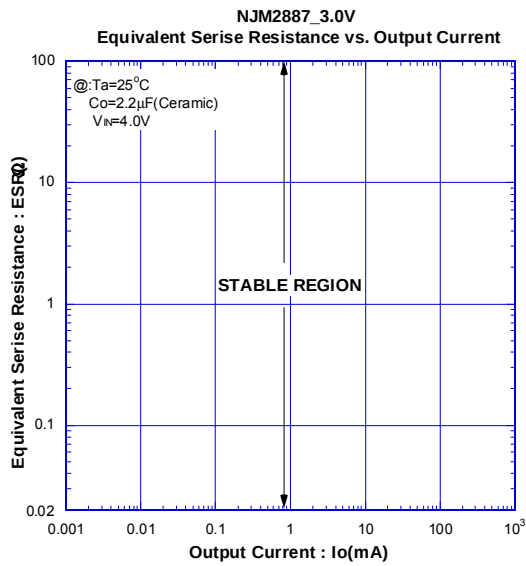

ELECTRICAL CHARACTERISTICS

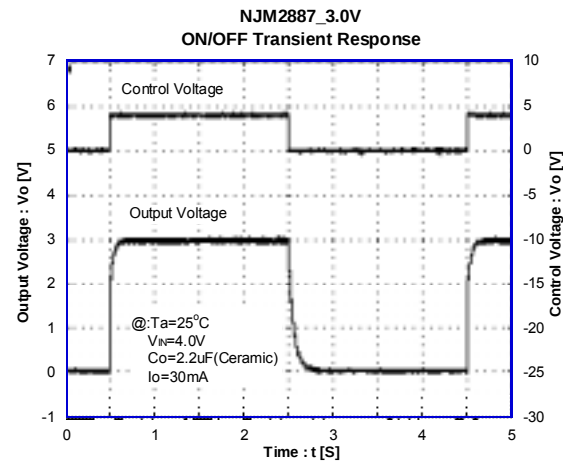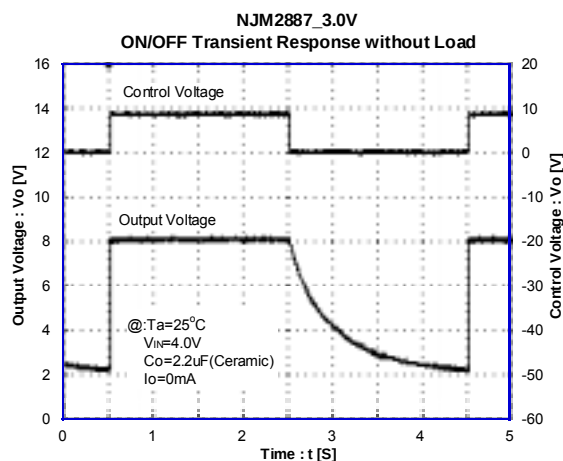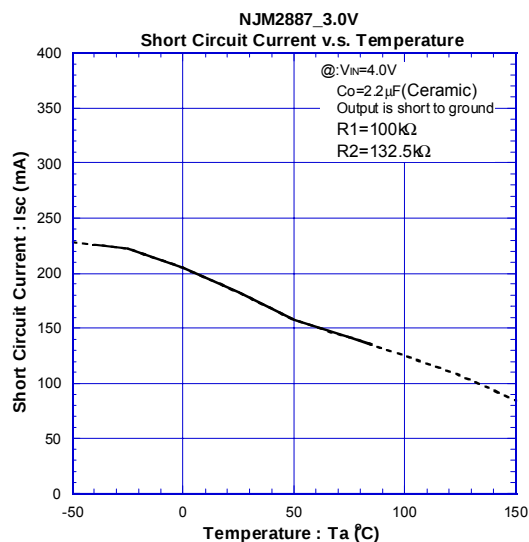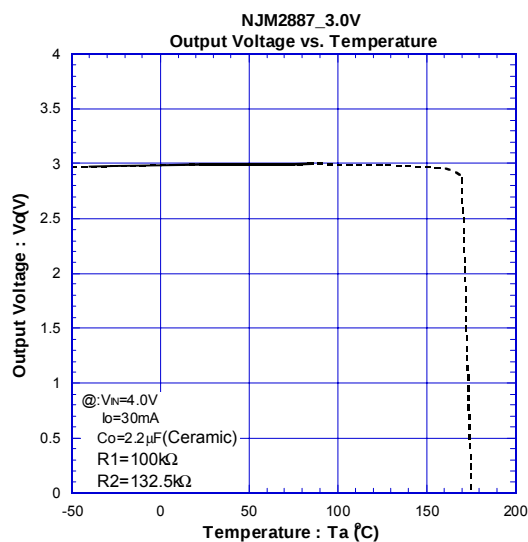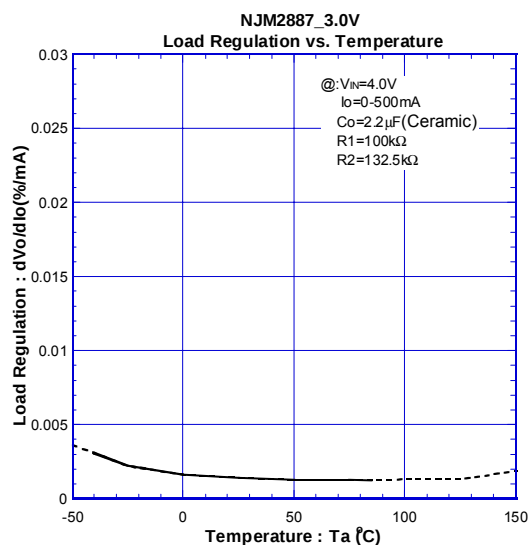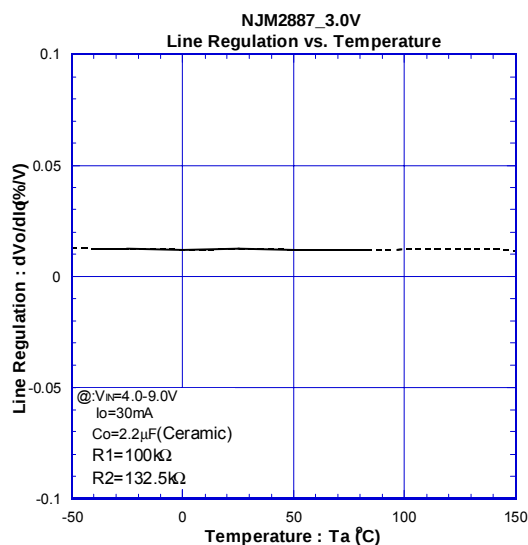

ELECTRICAL CHARACTERISTICS

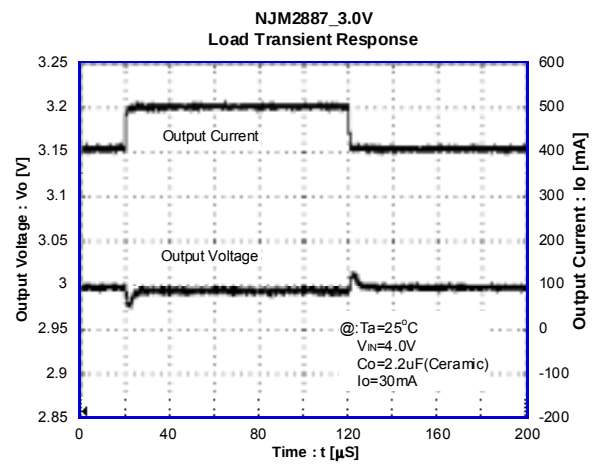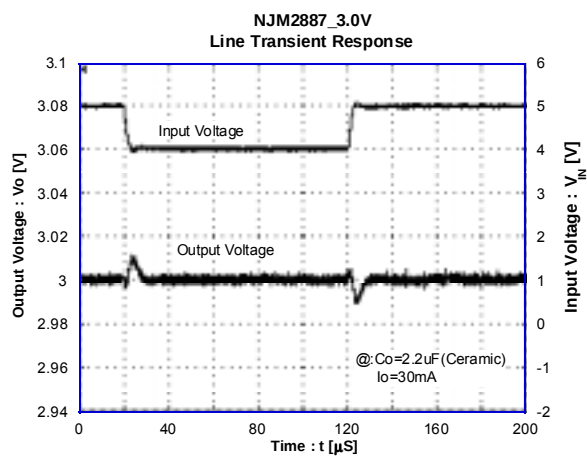

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.