

## LP2980

### Micropower SOT, 50 mA Ultra Low-Dropout Regulator

#### General Description

The LP2980 is a 50 mA, fixed-output voltage regulator designed specifically to meet the requirements of battery-powered applications.

Using an optimized VIP™ (Vertically Integrated PNP) process, the LP2980 delivers unequaled performance in all specifications critical to battery-powered designs:

**Dropout Voltage.** Typically 120 mV @ 50 mA load, and 7 mV @ 1 mA load.

**Ground Pin Current.** Typically 375  $\mu$ A @ 50 mA load, and 80  $\mu$ A @ 1 mA load.

**Sleep Mode.** Less than 1  $\mu$ A quiescent current when ON/OFF pin is pulled low.

**Smallest Possible Size.** SOT-23 package uses an absolute minimum of board space.

**Minimum Part Count.** Requires only 1  $\mu$ F of external capacitance on the regulator output.

**Precision Output.** 0.5% tolerance output voltages available (A grade).

5.0V, 3.3V, and 3.0V versions available as standard products.


#### Features

- Ultra low dropout voltage
- Output voltage accuracy 0.5% (A Grade)
- Guaranteed 50 mA output current
- Smallest possible size (SOT-23 Package)
- Requires only 1  $\mu$ F external capacitance
- < 1  $\mu$ A quiescent current when shutdown
- Low ground pin current at all load currents
- High peak current capability (150 mA typical)
- Wide supply voltage range (16V max)
- Fast dynamic response to line and load
- Low  $Z_{OUT}$  over wide frequency range
- Overtemperature/overcurrent protection
- -40°C to +125°C junction temperature range

#### Applications


- Cellular Phone
- Palmtop/Laptop Computer
- Personal Digital Assistant (PDA)
- Camcorder, Personal Stereo, Camera

#### Block Diagram

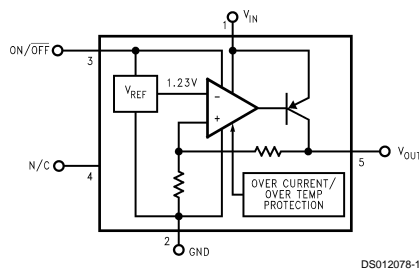

#### Connection Diagram and Ordering Information

##### 5-Lead Small Outline Package (M5)



Top View



Actual Size

For Ordering Information See Table 1 in this Datasheet  
See NS Package Number MA05B

VIP™ is a trademark of National Semiconductor Corporation.

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature Range	–65°C to +150°C
Operating Junction Temperature Range	–40°C to +125°C
Lead Temperature (Soldering, 5 sec.)	260°C

## ESD Rating (Note 2)

Power Dissipation (Note 3)	Internally Limited
Input Supply Voltage (Survival)	–0.3V to +16V
Input Supply Voltage (Operating)	2.1V to +16V
Shutdown Input Voltage (Survival)	–0.3V to +16V
Output Voltage (Survival), (Note 4)	–0.3V to +9V
I <sub>OUT</sub> (Survival)	Short Circuit Protected
Input-Output Voltage (Survival), (Note 5)	–0.3V to +16V

## Electrical Characteristics

Limits in standard typeface are for T<sub>J</sub> = 25°C, and limits in **boldface type** apply over the full operating temperature range. Unless otherwise specified: V<sub>IN</sub> = V<sub>O(NOM)</sub> + 1V, I<sub>L</sub> = 1 mA, C<sub>OUT</sub> = 1 µF, V<sub>ON/OFF</sub> = 2V.

Symbol	Parameter	Conditions	Typ	LP2980AI-XX (Note 6)		LP2980I-XX (Note 6)		Units
				Min	Max	Min	Max	
ΔV <sub>O</sub>	Output Voltage Tolerance	I <sub>L</sub> = 1 mA		–0.50	0.50	–1.0	1.0	%V <sub>NOM</sub>
		1 mA < I <sub>L</sub> < 50 mA		–0.75	0.75	–1.5	1.5	
				<b>–2.5</b>	<b>2.5</b>	<b>–3.5</b>	<b>3.5</b>	
$\frac{\Delta V_O}{\Delta V_{IN}}$	Output Voltage Line Regulation	V <sub>O(NOM)</sub> + 1V ≤ V <sub>IN</sub> ≤ 16V	0.007		0.014		0.014	%/V
V <sub>IN</sub> –V <sub>O</sub>	Dropout Voltage (Note 7)	I <sub>L</sub> = 0	1		3		3	mV
		I <sub>L</sub> = 1 mA	7		10		10	
					<b>15</b>		<b>15</b>	
		I <sub>L</sub> = 10 mA	40		60		60	
					<b>90</b>		<b>90</b>	
I <sub>GND</sub>	Ground Pin Current	I <sub>L</sub> = 50 mA	120		150		150	µA
					<b>225</b>		<b>225</b>	
		I <sub>L</sub> = 0	65		95		95	
					<b>125</b>		<b>125</b>	
		I <sub>L</sub> = 1 mA	80		110		110	
V <sub>ON/OFF</sub>	ON/OFF Input Voltage (Note 8)				<b>170</b>		<b>170</b>	V
		I <sub>L</sub> = 10 mA	140		220		220	
					<b>460</b>		<b>460</b>	
		I <sub>L</sub> = 50 mA	375		600		600	
					<b>1200</b>		<b>1200</b>	
I <sub>ON/OFF</sub>	ON/OFF Input Current	V <sub>ON/OFF</sub> < 0.18V	0		1		1	µA
		High = O/P ON	1.4	<b>1.6</b>		<b>1.6</b>		
		Low = O/P OFF	0.55		<b>0.18</b>		<b>0.18</b>	
I <sub>O(PK)</sub>	Peak Output Current	V <sub>ON/OFF</sub> = 0	0		<b>–1</b>		<b>–1</b>	mA
		V <sub>ON/OFF</sub> = 5V	5		<b>15</b>		<b>15</b>	
e <sub>n</sub>	Output Noise Voltage (RMS)	V <sub>OUT</sub> ≥ V <sub>O(NOM)</sub> – 5% BW = 300 Hz–50 kHz, C <sub>OUT</sub> = 10 µF	150	100		100		µV
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Ripple Rejection	f = 1 kHz C <sub>OUT</sub> = 10 µF	63					dB
I <sub>O(MAX)</sub>	Short Circuit Current	R <sub>L</sub> = 0 (Steady State) (Note 9)	150					mA

**Note 1:** Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its rated operating conditions.

**Note 2:** The ESD rating of pins 3 and 4 is 1 kV.

## Electrical Characteristics (Continued)

**Note 3:** The maximum allowable power dissipation is a function of the maximum junction temperature,  $T_{J(MAX)}$ , the junction-to-ambient thermal resistance,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is calculated using:

$$P (MAX) = \frac{T_{J(MAX)} - T_A}{\theta_{JA}}$$

The value of  $\theta_{JA}$  for the SOT-23 package is 220°C/W. Exceeding the maximum allowable power dissipation will cause excessive die temperature, and the regulator will go into thermal shutdown.

**Note 4:** If used in a dual-supply system where the regulator load is returned to a negative supply, the LP2980 output must be diode-clamped to ground.

**Note 5:** The output PNP structure contains a diode between the  $V_{IN}$  and  $V_{OUT}$  terminals that is normally reverse-biased. Reversing the polarity from  $V_{IN}$  to  $V_{OUT}$  will turn on this diode (see Application Hints).


**Note 6:** Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlation using Statistical Quality Control (SQC) methods. The limits are used to calculate National's Averaging Outgoing Level (AOQL).

**Note 7:** Dropout voltage is defined as the input to output differential at which the output voltage drops 100 mV below the value measured with a 1V differential.

**Note 8:** The ON/OFF inputs must be properly driven to prevent misoperation. For details, refer to Application Hints.

**Note 9:** See Typical Performance Characteristics curves.

## Basic Application Circuit

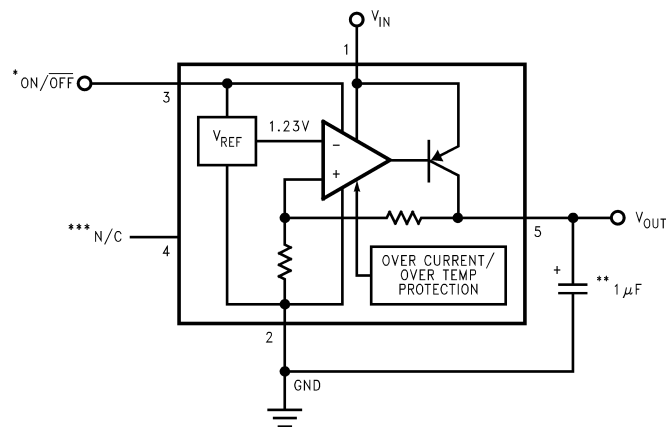

DS012078-2

\*ON/OFF input must be actively terminated. Tie to  $V_{IN}$  if this function is not to be used.

\*\*Minimum Output Capacitance is 1  $\mu F$  to insure stability over full load current range. More capacitance provides superior dynamic performance and additional stability margin (see Application Hints).

\*\*\*Do not make connections to this pin.

## Ordering Information

TABLE 1. Package Marking and Order Information


Output Voltage (V)	Grade	Order Information	Package Marking	Supplied as:
2.5	A	LP2980AIM5X-2.5	L0NA	3k Units on Tape and Reel
2.5	A	LP2980AIM5-2.5	L0NA	250 Units on Tape and Reel
2.5	STD	LP2980IM5X-2.5	L0NB	3k Units on Tape and Reel
2.5	STD	LP2980IM5-2.5	L0NB	250 Units on Tape and Reel
2.6	A	LP2980AIM5X-2.6	L48A	3k Units on Tape and Reel
2.6	A	LP2980AIM5-2.6	L48A	250 Units on Tape and Reel
2.6	STD	LP2980IM5X-2.6	L48B	3k Units on Tape and Reel
2.6	STD	LP2980IM5-2.6	L48B	250 Units on Tape and Reel
2.7	A	LP2980AIM5X-2.7	L26A	3k Units on Tape and Reel
2.7	A	LP2980AIM5-2.7	L26A	250 Units on Tape and Reel
2.7	STD	LP2980IM5X-2.7	L26B	3k Units on Tape and Reel
2.7	STD	LP2980IM5-2.7	L26B	250 Units on Tape and Reel
2.8	A	LP2980AIM5X-2.8	L13A	3k Units on Tape and Reel
2.8	A	LP2980AIM5-2.8	L13A	250 Units on Tape and Reel
2.8	STD	LP2980IM5X-2.8	L13B	3k Units on Tape and Reel
2.8	STD	LP2980IM5-2.8	L13B	250 Units on Tape and Reel
2.9	A	LP2980AIM5X-2.9	L12A	3k Units on Tape and Reel
2.9	A	LP2980AIM5-2.9	L12A	250 Units on Tape and Reel
2.9	STD	LP2980IM5X-2.9	L12B	3k Units on Tape and Reel
2.9	STD	LP2980IM5-2.9	L12B	250 Units on Tape and Reel
3.0	A	LP2980AIM5X-3.0	L02A	3k Units on Tape and Reel
3.0	A	LP2980AIM5-3.0	L02A	250 Units on Tape and Reel
3.0	STD	LP2980IM5X-3.0	L02B	3k Units on Tape and Reel
3.0	STD	LP2980IM5-3.0	L02B	250 Units on Tape and Reel
3.1	A	LP2980AIM5X-3.1	L30A	3k Units on Tape and Reel
3.1	A	LP2980AIM5-3.1	L30A	250 Units on Tape and Reel
3.1	STD	LP2980IM5X-3.1	L30B	3k Units on Tape and Reel
3.1	STD	LP2980IM5-3.1	L30B	250 Units on Tape and Reel
3.2	A	LP2980AIM5X-3.2	L31A	3k Units on Tape and Reel
3.2	A	LP2980AIM5-3.2	L31A	250 Units on Tape and Reel
3.2	STD	LP2980IM5X-3.2	L31B	3k Units on Tape and Reel
3.2	STD	LP2980IM5-3.2	L31B	250 Units on Tape and Reel
3.3	A	LP2980AIM5X-3.3	L00A	3k Units on Tape and Reel
3.3	A	LP2980AIM5-3.3	L00A	250 Units on Tape and Reel
3.3	STD	LP2980IM5X-3.3	L00B	3k Units on Tape and Reel
3.3	STD	LP2980IM5-3.3	L00B	250 Units on Tape and Reel
3.5	A	LP2980AIM5X-3.5	L27A	3k Units on Tape and Reel
3.5	A	LP2980AIM5-3.5	L27A	250 Units on Tape and Reel
3.5	STD	LP2980IM5X-3.5	L27B	3k Units on Tape and Reel
3.5	STD	LP2980IM5-3.5	L27B	250 Units on Tape and Reel
3.6	A	LP2980AIM5X-3.6	L28A	3k Units on Tape and Reel
3.6	A	LP2980AIM5-3.6	L28A	250 Units on Tape and Reel
3.6	STD	LP2980IM5X-3.6	L28B	3k Units on Tape and Reel
3.6	STD	LP2980IM5-3.6	L28B	250 Units on Tape and Reel
3.8	A	LP2980AIM5X-3.8	L21A	3k Units on Tape and Reel

## Ordering Information (Continued)

TABLE 1. Package Marking and Order Information (Continued)

Output Voltage (V)	Grade	Order Information	Package Marking	Supplied as:
3.8	A	LP2980AIM5-3.8	L21A	250 Units on Tape and Reel
3.8	STD	LP2980IM5X-3.8	L21B	3k Units on Tape and Reel
3.8	STD	LP2980IM5-3.8	L21B	250 Units on Tape and Reel
4.0	A	LP2980AIM5X-4.0	L25A	3k Units on Tape and Reel
4.0	A	LP2980AIM5-4.0	L25A	250 Units on Tape and Reel
4.0	STD	LP2980IM5X-4.0	L25B	3k Units on Tape and Reel
4.0	STD	LP2980IM5-4.0	L25B	250 Units on Tape and Reel
4.5	A	LP2980AIM5X-4.5	L0XA	3k Units on Tape and Reel
4.5	A	LP2980AIM5-4.5	L0XA	250 Units on Tape and Reel
4.5	STD	LP2980IM5X-4.5	L0XB	3k Units on Tape and Reel
4.5	STD	LP2980IM5-4.5	L0XB	250 Units on Tape and Reel
4.7	A	LP2980AIM5X-4.7	L37A	3k Units on Tape and Reel
4.7	A	LP2980AIM5-4.7	L37A	250 Units on Tape and Reel
4.7	STD	LP2980IM5X-4.7	L37B	3k Units on Tape and Reel
4.7	STD	LP2980IM5-4.7	L37B	250 Units on Tape and Reel
5.0	A	LP2980AIM5X-5.0	L01A	3k Units on Tape and Reel
5.0	A	LP2980AIM5-5.0	L01A	250 Units on Tape and Reel
5.0	STD	LP2980IM5X-5.0	L01B	3k Units on Tape and Reel
5.0	STD	LP2980IM5-5.0	L01B	250 Units on Tape and Reel


## Connection Diagram




Top View  
See NS Package Number MA05A

# **Typical Performance Characteristics** Unless otherwise specified: $T_A = 25^\circ\text{C}$ , $V_{IN} = V_{O(NOM)} + 1\text{V}$ , $C_{OUT} = 2.2\ \mu\text{F}$ , all voltage options, ON/OFF pin tied to $V_{IN}$ .


**Output Voltage vs Temperature**

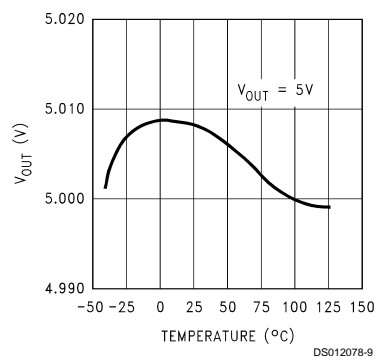


**Output Voltage vs Temperature**

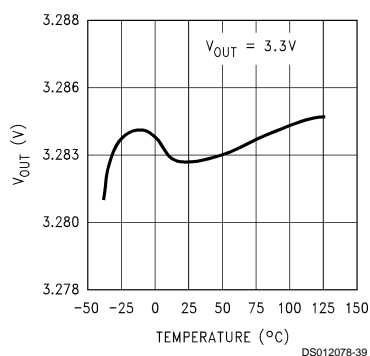


**Output Voltage vs Temperature**

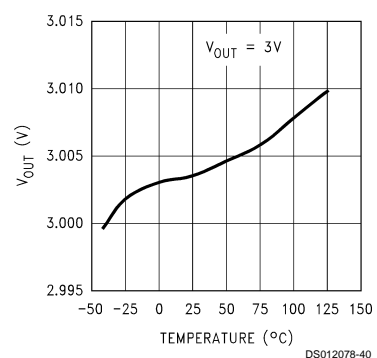


**Dropout Characteristics**

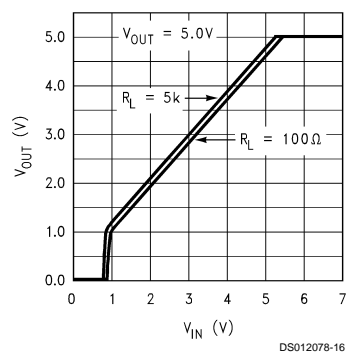

**Dropout Characteristics**

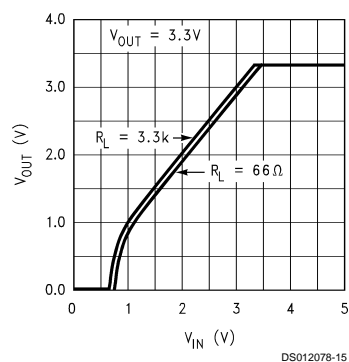


**Dropout Characteristics**

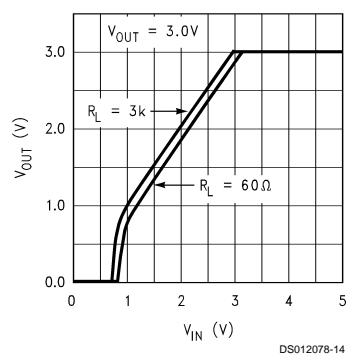


**Typical Performance Characteristics** Unless otherwise specified:  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = V_{O(NOM)} + 1\text{V}$ ,  $C_{OUT} = 2.2\ \mu\text{F}$ , all voltage options, ON/OFF pin tied to  $V_{IN}$ . (Continued)


**Dropout Voltage vs Temperature**

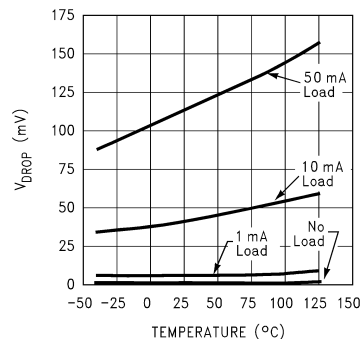


**Dropout Voltage vs Load Current**

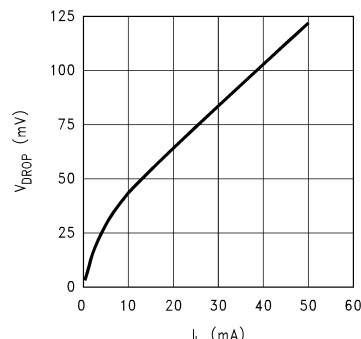


**Ground Pin Current vs Temperature**

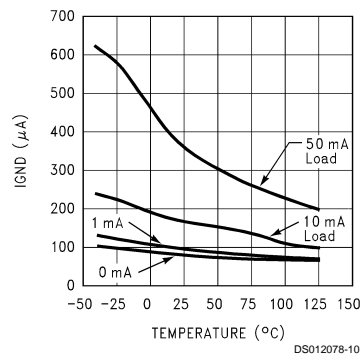


**Ground Pin Current vs Load Current**

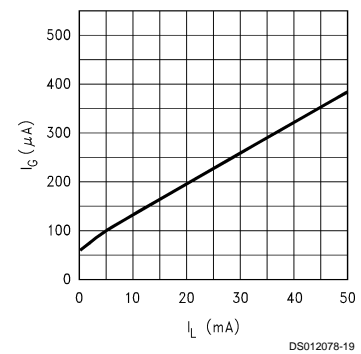

**Input Current vs  $V_{IN}$**

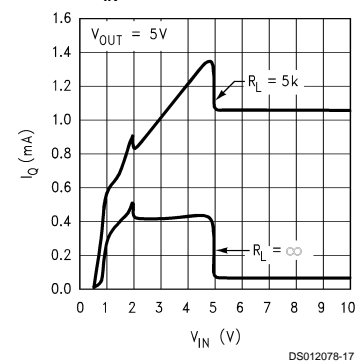


**Input Current vs  $V_{IN}$**

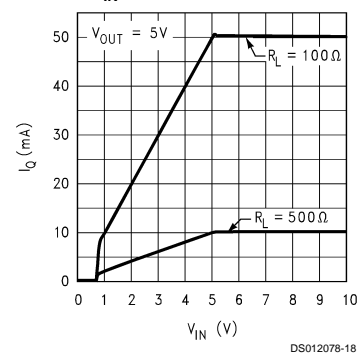


**Typical Performance Characteristics** Unless otherwise specified:  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = V_{O(NOM)} + 1\text{V}$ ,  $C_{OUT} = 2.2\text{ }\mu\text{F}$ , all voltage options, ON/OFF pin tied to  $V_{IN}$ . (Continued)

**Line Transient Response**




DS012078-21

**Line Transient Response**




DS012078-22

**Load Transient Response**

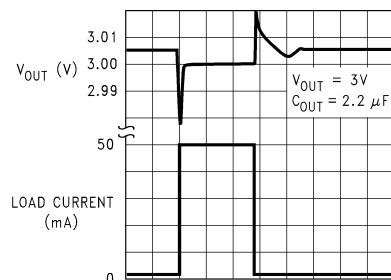


DS012078-41

**Load Transient Response**

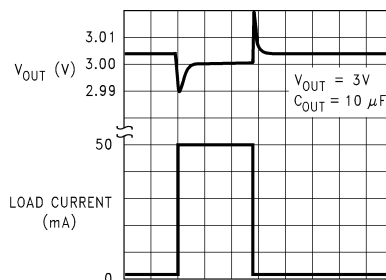


DS012078-42

**Load Transient Response**

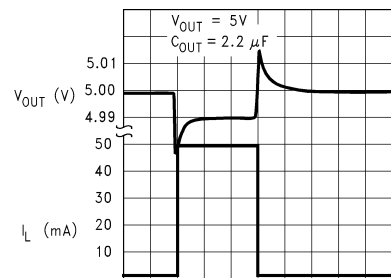

DS012078-23

**Load Transient Response**

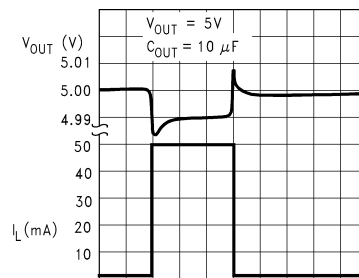


DS012078-24




**Typical Performance Characteristics** Unless otherwise specified:  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = V_{O(NOM)} + 1\text{V}$ ,  $C_{OUT} = 2.2\ \mu\text{F}$ , all voltage options, ON/OFF pin tied to  $V_{IN}$ . (Continued)


#### Short Circuit Current

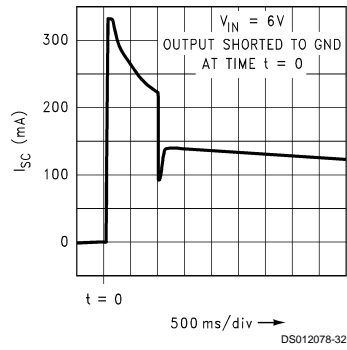


#### Instantaneous Short Circuit Current vs Temperature

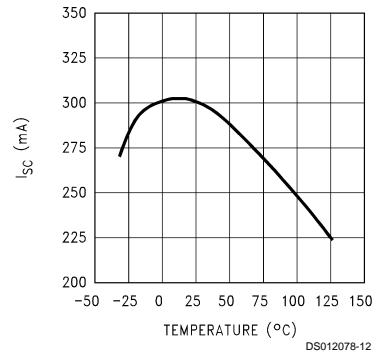


#### Short Circuit Current




#### Instantaneous Short Circuit Current vs Output Voltage

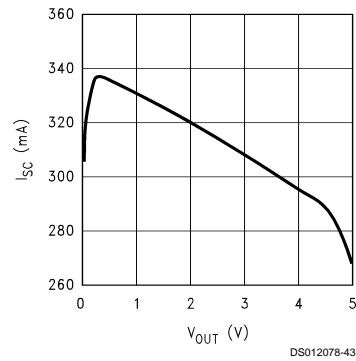

#### Output Impedance vs Frequency

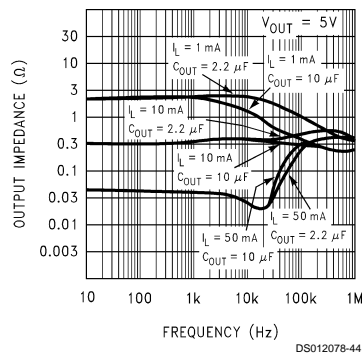


#### Output Impedance vs Frequency

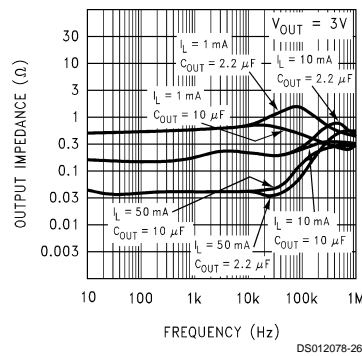


**Typical Performance Characteristics** Unless otherwise specified:  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = V_{O(NOM)} + 1\text{V}$ ,  $C_{OUT} = 2.2\ \mu\text{F}$ , all voltage options, ON/OFF pin tied to  $V_{IN}$ . (Continued)


#### Output Noise Density

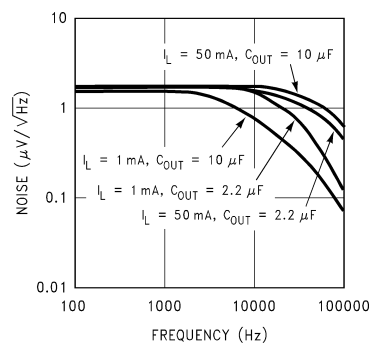


#### Ripple Rejection

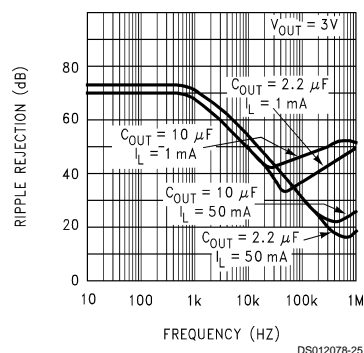


#### Input to Output Leakage vs Temperature

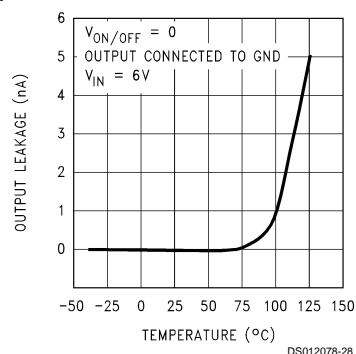


#### Output Reverse Leakage vs Temperature

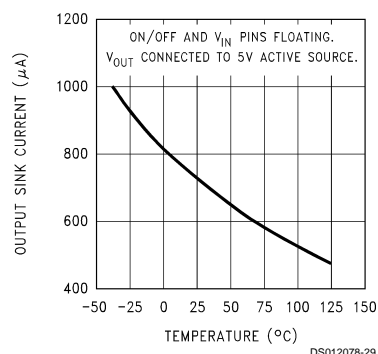

#### Turn-On Waveform

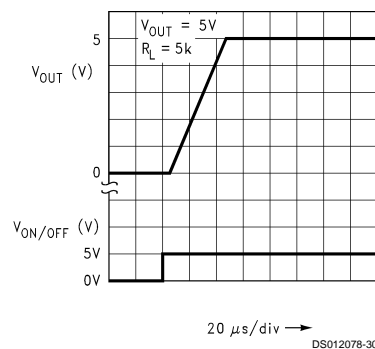


#### Turn-Off Waveform

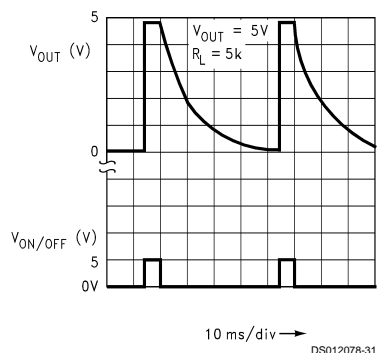

**Typical Performance Characteristics** Unless otherwise specified:  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = V_{O(NOM)} + 1\text{V}$ ,  $C_{OUT} = 2.2\ \mu\text{F}$ , all voltage options, ON/OFF pin tied to  $V_{IN}$ . (Continued)

**ON/OFF Pin Current vs  $V_{ON/OFF}$**

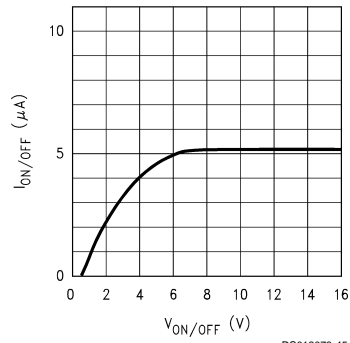

## Application Hints

### OUTPUT CAPACITOR

Like any low-dropout regulator, the LP2980 requires an output capacitor to maintain regulator loop stability. This capacitor must be selected to meet the requirements of minimum capacitance and equivalent series resistance (ESR) range. It is not difficult to find capacitors which meet the criteria of the LP2980, as the acceptable capacitance and ESR ranges are wider than for most other LDOs.

In general, the capacitor value must be at least 1  $\mu\text{F}$  (over the actual ambient operating temperature), and the ESR must be within the range indicated in Figures 1, 2 and Figure 3. It should be noted that, although a maximum ESR is shown in these Figures, it is very unlikely to find a capacitor with ESR that high.

### Tantalum Capacitors

Surface-mountable solid tantalum capacitors offer a good combination of small physical size for the capacitance value, and ESR in the range needed by the LP2980.

The results of testing the LP2980 stability with surface-mount solid tantalum capacitors show good stability with values of at least 1  $\mu\text{F}$ . The value can be increased to 2.2  $\mu\text{F}$  (or more) for even better performance, including transient response and noise.

Small value tantalum capacitors that have been verified as suitable for use with the LP2980 are shown in Table 2. Capacitance values can be increased without limit.

### Aluminum Electrolytic Capacitors

Although probably not a good choice for a production design, because of relatively large physical size, an aluminum electrolytic capacitor can be used in the design prototype for an LP2980 regulator. A value of at least 1  $\mu\text{F}$  should be used, and the ESR must meet the conditions of Figures 1, 2 and Figure 3. If the operating temperature drops below 0°C, the regulator may not remain stable, as the ESR of the aluminum electrolytic capacitor will increase, and may exceed the limits indicated in the Figures.

TABLE 2. Surface-Mount Tantalum Capacitor Selection Guide

1 $\mu\text{F}$ Surface-Mount Tantalums	
Manufacturer	Part Number
Kemet	T491A105M010AS
NEC	NRU105M10
Siemens	B45196-E3105-K
Nichicon	F931C105MA
Sprague	293D105X0016A2T
2.2 $\mu\text{F}$ Surface-Mount Tantalums	
Manufacturer	Part Number
Kemet	T491A225M010AS
NEC	NRU225M06
Siemens	B45196/2.2/10/10
Nichicon	F930J225MA
Sprague	293D225X0010A2T

### Multilayer Ceramic Capacitors

Surface-mountable multilayer ceramic capacitors may be an attractive choice because of their relatively small physical size and excellent RF characteristics. However, they some-

times have ESR values lower than the minimum required by the LP2980, and relatively large capacitance change with temperature. The manufacturer's datasheet for the capacitor should be consulted before selecting a value.

Test results of LP2980 stability using multilayer ceramic capacitors show that a minimum value of 2.2  $\mu\text{F}$  is usually needed for the 5V regulator. For the lower output voltages, or for better performance, a higher value should be used, such as 4.7  $\mu\text{F}$ .

Multilayer ceramic capacitors that have been verified as suitable for use with the LP2980 are shown in Table 3.

TABLE 3. Surface-Mount Multilayer Ceramic Capacitor Selection Guide

2.2 $\mu\text{F}$ Surface-Mount Ceramic	
Manufacturer	Part Number
Token	1E225ZY5U-C203
Murata	GRM42-6Y5V225Z16
4.7 $\mu\text{F}$ Surface-Mount Ceramic	
Manufacturer	Part Number
Token	1E475ZY5U-C304

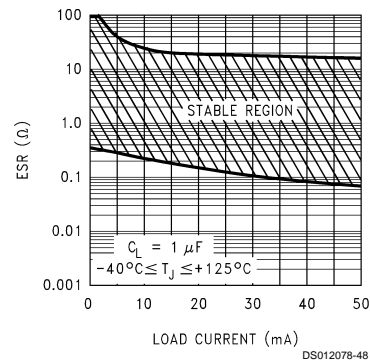


FIGURE 1. 1  $\mu\text{F}$  ESR Range

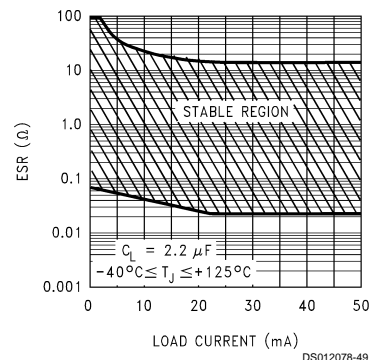


FIGURE 2. 2.2  $\mu\text{F}$  ESR Range

## Application Hints (Continued)

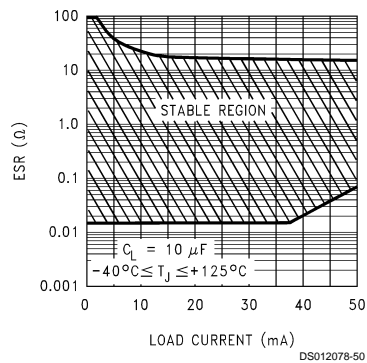


FIGURE 3. 10  $\mu$ F ESR Range

### REVERSE CURRENT PATH

The power transistor used in the LP2980 has an inherent diode connected between the regulator input and output (see below).




FIGURE 4. LP2980 Reverse Current Path

If the output is forced above the input by more than a  $V_{BE}$ , this diode will become forward biased and current will flow from the  $V_{OUT}$  terminal to  $V_{IN}$ . No damage to the LP2980 will occur under these conditions as long as the current flowing into the output pin does not exceed 100 mA.

### ON/OFF INPUT OPERATION

The LP2980 is shut off by pulling the ON/OFF input low, and turned on by driving the input high. If this feature is not to be used, the ON/OFF input should be tied to  $V_{IN}$  to keep the regulator on at all times (the ON/OFF input must **not** be left floating).

To ensure proper operation, the signal source used to drive the ON/OFF input must be able to swing above and below the specified turn-on/turn-off voltage thresholds which guarantee an ON or OFF state (see Electrical Characteristics).

The ON/OFF signal may come from either a totem-pole output, or an open-collector output with pull-up resistor to the LP2980 input voltage or another logic supply. The high-level voltage may exceed the LP2980 input voltage, but must remain within the Absolute Maximum Ratings for the ON/OFF pin.

It is also important that the turn-on/turn-off voltage signals applied to the ON/OFF input have a slew rate which is greater than 40 mV/ $\mu$ s.

Important: the regulator shutdown function will operate incorrectly if a slow-moving signal is applied to the ON/OFF input.

## Typical Applications

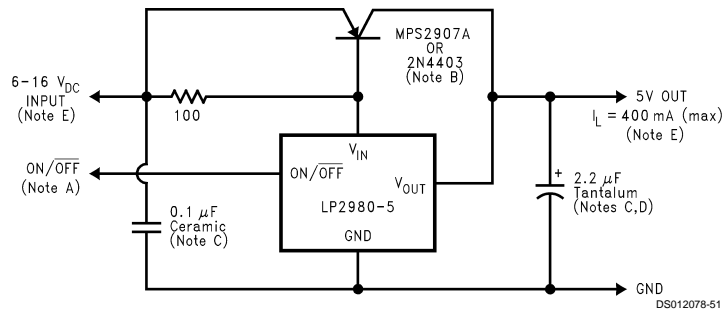


FIGURE 5. 5V/400mA Regulator

The LP2980 can be used to control higher-current regulators, by adding an external PNP pass device. With the PNP transistors shown in , the output current can be as high as 400 mA, as long as the input voltage is held within the Safe Operation Boundary Curves shown below in.

To ensure regulation, the minimum input voltage of this regulator is 6V. This "headroom" is the sum of the  $V_{BE}$  of the external transistor and the dropout voltage of the LP2980.

### Notes:

A. Drive this input with a logic signal (see Application Hints). If the shutdown function is not to be used, tie the ON/OFF pin directly to the  $V_{IN}$  pin.

B. Recommended devices (other PNP transistors can be used if the current gain and voltage ratings are similar).

C. Capacitor is required for regulator stability. Minimum size is shown, and may be increased without limit.

D. Increasing the output capacitance improves transient response and increases phase margin.

E. Maximum safe input voltage and load current are limited by power dissipation in the PNP pass transistor and the maximum ambient temperature for the specific application. If a TO-92 transistor such as the MPS2907A is used, the thermal resistance from junction-to-ambient is 180°C/W in still air.

Assuming a maximum allowable junction temperature of 150°C for the MPS2907A device, the following curves show the maximum  $V_{IN}$  and  $I_L$  values that may be safely used for several ambient temperatures.

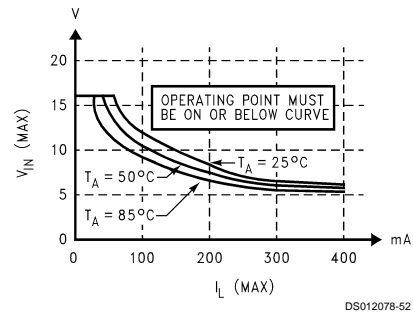


FIGURE 6. Safe Operation Boundary Curves for Figure 5

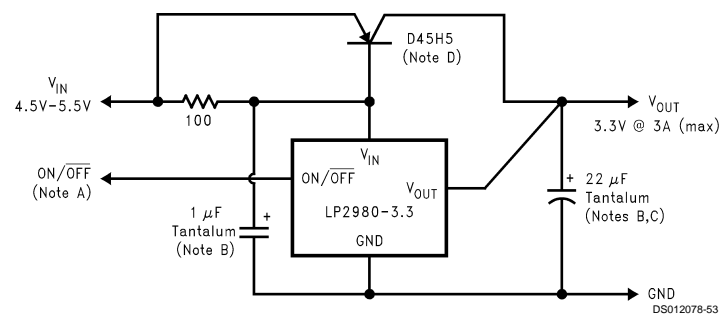


FIGURE 7. 5V to 3.3V @ 3A Converter

With limited input voltage range, the LP2980 can control a 3.3V, 3A regulator with the use of a high current-gain external PNP pass transistor as shown in . If the regulator is to be loaded with the full 3A, heat sinking will be required on the pass transistor to keep it within its rated temperature range. Refer to the Heatsink Thermal Resistance Requirements,

below. For best load regulation at the high load current, the LP2980 output voltage connection should be made as close to the load as possible.

Although this regulator can handle a much higher load current than can the LP2980 alone, it can be shut down in the same manner as the LP2980. When the ON/OFF control is

## Typical Applications (Continued)

brought low, the converter will be in shutdown, and will draw less than 1  $\mu\text{A}$  from the source.

### Notes:

- A. Drive this input with a logic signal (see Application Hints). If the shutdown function is not to be used, tie the ON/OFF pin directly to the  $V_{\text{IN}}$  pin.
- B. Capacitor is required for regulator stability. Minimum size is shown, and may be increased without limit.
- C. Increasing the output capacitance improves transient response and increases phase margin.
- D. A heatsink may be required for this transistor. The maximum allowable value for thermal resistance of the heatsink is dependent on ambient temperature and load current (see curves in ). Once the value is obtained from the graph, a heatsink must be selected which has a thermal resistance equal to or lower than this value. If the value is above 60°C/W, no heatsink is required (the TO-220 package alone will safely dissipate this).

For these curves, a maximum junction temperature of 150°C is assumed for the pass transistor. The case-to-heatsink at-

tachment thermal resistance is assumed to be 1.5°C/W. All calculations are for 5.5V input voltage (which is worst-case for power dissipation).

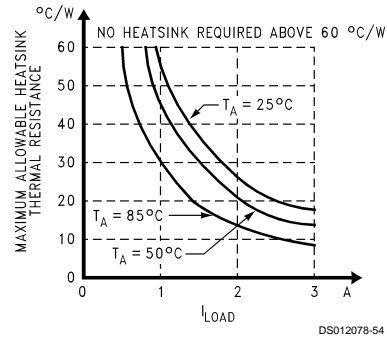
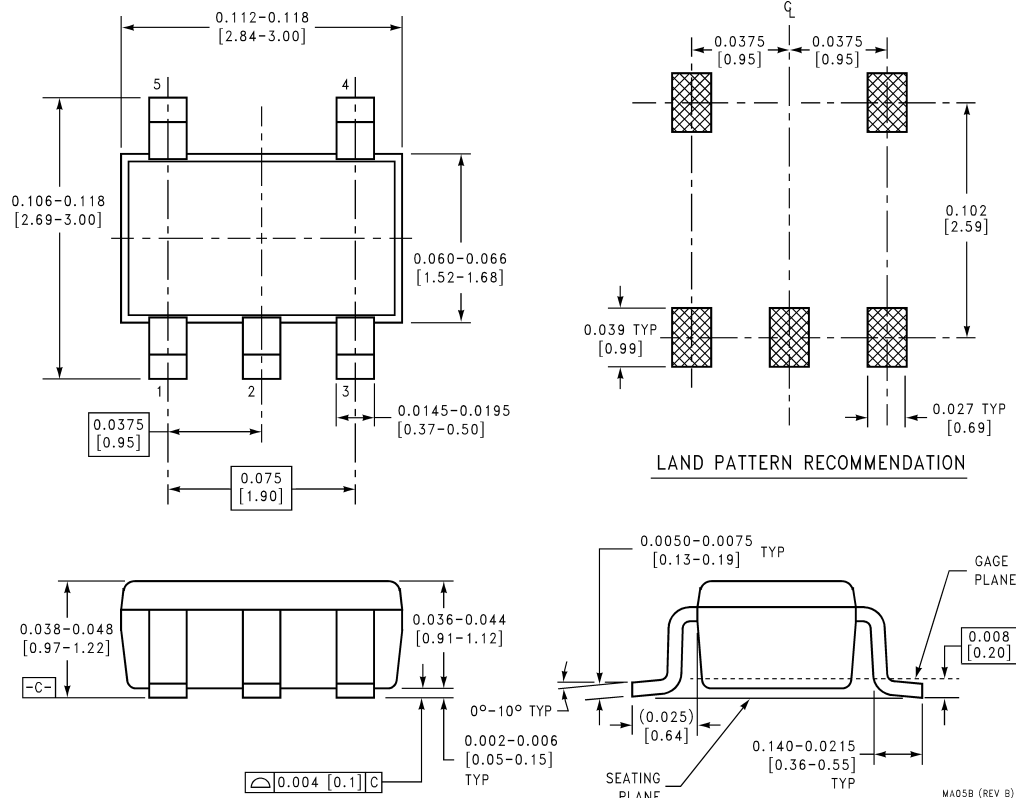


FIGURE 8. Heatsink Thermal Resistance Requirements for Figure 7

**Physical Dimensions** inches (millimeters) unless otherwise noted

**5-Lead Small Outline Package (M5)  
NS Package Number MA05B**

For Order Numbers, refer to *Table 1* in the “Order Information” section of this document.

## LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
Americas  
Tel: 1-800-272-9959  
Fax: 1-800-737-7018  
Email: [support@nsc.com](mailto:support@nsc.com)

www.national.com

**National Semiconductor  
Europe**

Fax: +49 (0) 1 80-530 85 86  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
Deutsch Tel: +49 (0) 1 80-530 85 85  
English Tel: +49 (0) 1 80-532 78 32  
Français Tel: +49 (0) 1 80-532 93 58  
Italiano Tel: +49 (0) 1 80-534 16 80

**National Semiconductor  
Asia Pacific Customer**

**Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: [sea.support@nsc.com](mailto:sea.support@nsc.com)

Email: [sea.support@nsc.com](mailto:sea.support@nsc.com)

**National Semiconductor  
Japan Ltd.**

Tel: 81-3-5639-7560  
Fax: 81-3-5639-7507

Fax: 81-3-5639-7507

Fax: 81-3-5639-7507