## **PF0414A**

# MOS FET Power Amplifier Module for DCS 1800 Handy Phone

## HITACHI

ADE-208-431B (Z) 3rd Edition December 1997

### **Application**


For DCS 1800 class1 1710 to 1785 MHz.

#### **Features**

3stage amplifier
Small package: 0.2cc
High efficiency: 45% Typ
High speed switching: 0.9 µsec

### **Pin Arrangement**

■ BF-K



1: Pin 2: Yapo 3: Ydd 4: Pout G: GND

#### **Absolute Maximum Ratings** ( $Tc = 25^{\circ}C$ )


Item	Symbol	Rating	Unit	Unit	
Supply voltage	$V_{DD}$	11	V		
Supply current	I <sub>DD</sub>	3	Α		
V <sub>APC</sub> voltage	$V_{APC}$	6	V		
Input power	Pin	20	mW		
Operating case temperature	Tc (op)	-30 to +100	°C	—	
	Tc (op)	-30 to +100 -30 to +100	°C	_	



## **PF0414A**


## **Electrical Characteristics** ( $Tc = 25^{\circ}C$ )

Item	Symbol	Min	Тур	Max	Unit	Test Condition
Frequency range	f	1710	_	1785	MHz	
Control voltage range	$V_{APC}$	0.5	_	3	V	
Drain cutoff current	I <sub>DS</sub>	_	_	100	μΑ	$V_{DD} = 11 \text{ V}, V_{APC} = 0 \text{ V}$
Total efficiency	Т	37	45	_	%	$Pin = 2 \text{ mW}, V_{DD} = 4.8 \text{ V},$
2nd harmonic distortion	2nd H.D.	_	-45	-35	dBc	Pout = 1.8 W (at APC controlled),
3rd harmonic distortion	3rd H.D.	_	<b>-45</b>	-35	dBc	$R_L = Rg = 50$ , $Tc = 25$ °C
Input VSWR	VSWR (in)	_	1.5	3	_	
Output power (1)	Pout (1)	2.0	2.4	_	W	$\begin{aligned} \text{Pin} &= 2 \text{ mW},  \text{V}_{\text{DD}} = 4.8 \text{ V}, \\ \text{V}_{\text{APC}} &= 3 \text{ V},  \text{R}_{\text{L}} = \text{Rg} = 50  , \\ \text{Tc} &= 25^{\circ}\text{C} \end{aligned}$
Output power (2)	Pout (2)	1.2	1.5	_	W	$\begin{aligned} \text{Pin} &= 2 \text{ mW},  \text{V}_{\text{DD}} = 4.3  \text{V}, \\ \text{V}_{\text{APC}} &= 3  \text{V},  \text{R}_{\text{L}} = \text{Rg} = 50  , \\ \text{Tc} &= 80^{\circ}\text{C} \end{aligned}$
Isolation	_	_	-40	-30	dBm	$\begin{aligned} \text{Pin} &= 2 \text{ mW}, \text{ V}_{\text{DD}} = 4.8 \text{ V}, \\ \text{V}_{\text{APC}} &= 0.5 \text{ V}, \text{ R}_{\text{L}} = \text{Rg} = 50 \\ \text{Tc} &= 25^{\circ}\text{C} \end{aligned} ,$
Switching time	tr, tf	_	0.9	2	μs	$\begin{aligned} & \text{Pin} = 2 \text{ mW}, \text{ V}_{\text{DD}} = 4.8 \text{ V}, \\ & \text{Pout} = 1.8 \text{ W}, \text{ R}_{\text{L}} = \text{Rg} = 50 \\ & \text{Tc} = 25^{\circ}\text{C} \end{aligned} ,$
Stability	_	No parasitic oscillation			_	$\begin{aligned} &\text{Pin} = 2 \text{ mW}, \text{ V}_{\text{DD}} = 6 \text{ V}, \\ &\text{Ids}  0.9 \text{ A (only pulsed)}, \\ &\text{Pout}  1.8 \text{ W (at APC controlled)}, \\ &\text{Rg} = 50  , \text{ t} = 20 \text{ sec.}, \text{ Tc} = 25^{\circ}\text{C}, \\ &\text{Output VSWR} = 10: 1 \text{ All phases} \end{aligned}$

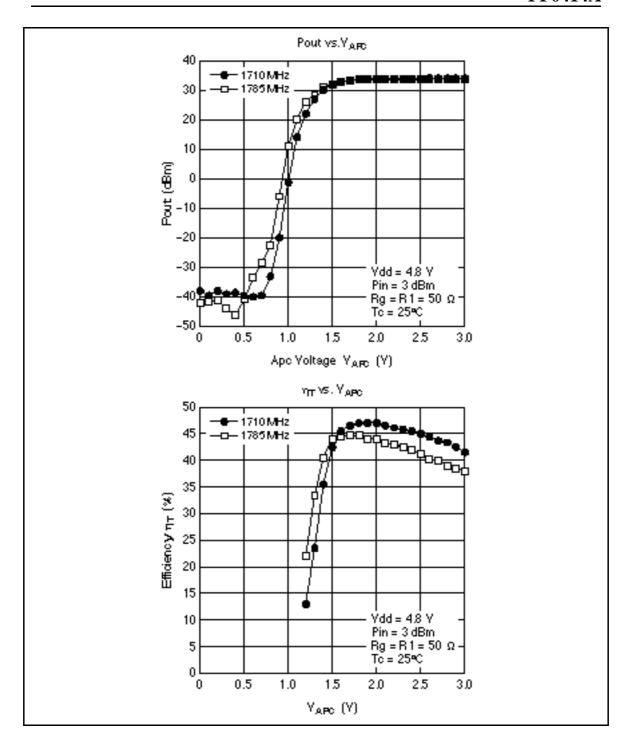

### PF0414A

### **Package Dimensions**

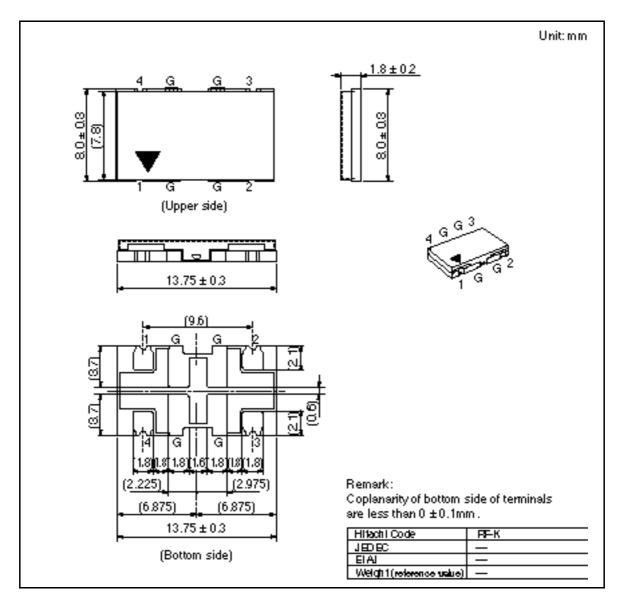

When using this document, keep the following in mind:

- 1. This document may, wholly or partially, be subject to change without notice.
- 2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
- 3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
- 4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
- 5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
- 6. MEDICAL APPLICATIONS: Hitachi's products are not authorized for use in MEDICAL APPLICATIONS without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in MEDICAL APPLICATIONS.

## HITACHI

#### Hitachi, Ltd.

Semiconductor & IC Diu Nippon Bidg., 2-6-C, Oht-machi, Chiyoda-ku, Tokyo 100, Japan Tel: Tokyo (08) 8270-2111 Fa∎: (08) 8270-5109

For further information write to:

Hitachi America, Ltd. Semiconductor & IC Diu 2000 Sierra Point Partura y Brisbane, CA 94005-1885 USA

Tel: 415-589-8800 Fall: 415-588-4007 Hilachi Burope GmbH
Bectronic Components Group
Continental Burope
Domacher Straße 8
D-85622 Feldkirchen
München
Tel: 089-9 91 80-0
Fai: 089-9 29 80 00

Hilachi Burope Lti.
Bectronic Components Di u
Northern Burope Headquariers
Villebrook Park.
Lower Cookham Road
Maldenhead
Berkshire 8L6 8YA.
United Kingdom
Tel: 0628-585000
Fair: 0628-778822

Hilachi Asia Fie. Ltd. 16 Collyer Quay #20-00 Hilachi Tomer Singapore 0104 Tel: 585-2100 Fai: 585-1588

Hilachi Asia (Hong Kong) Lid. Unit 706, North Tower, Verid Finance Centre, Harbour City Canton Road Taim Sha Tsul, Kowloon Hong Kong Tel: 27859218 Fai: 27806071

Copyright © Hitachi, Ltd., 1997. All rights reserved. Printed in Japan.