

CMOS System Reset Monolithic IC PST37XXU Series

Outline

This CMOS output type system reset IC, developed using the CMOS. Super low consumption current of 1.0 μ A typ. (PST3709 ~ PST3719) has been achieved through use of the CMOS process. Also, detection voltage is high precision detection of $\pm 2\%$.

Features

- | | |
|--------------------------------------|---|
| (1) Super low consumption current | 1.0 μ A typ. (when $V_{DD} = (-V_{DET}) + 2.0V$) PST3709 ~ PST3719 |
| (2) High precision detection voltage | $\pm 2\%$ |
| (3) Operating range | 0.7 ~ 10V |
| (4) Wide operating temperature range | -30 ~ +85°C |
| (5) Detection voltage | 0.9 ~ 6.0V (0.1V step) |


Package

SC-82AB

Applications

- (1) Microcomputer, CPU, MPU reset circuits
- (2) Logic circuit reset circuits
- (3) Battery voltage check circuits
- (4) Back-up circuit switching circuits
- (5) Level detection circuits


Pin Assignment



SC-82AB
(TOP VIEW)

1	OUT
2	V_{DD}
3	NC
4	GND

Block Diagram

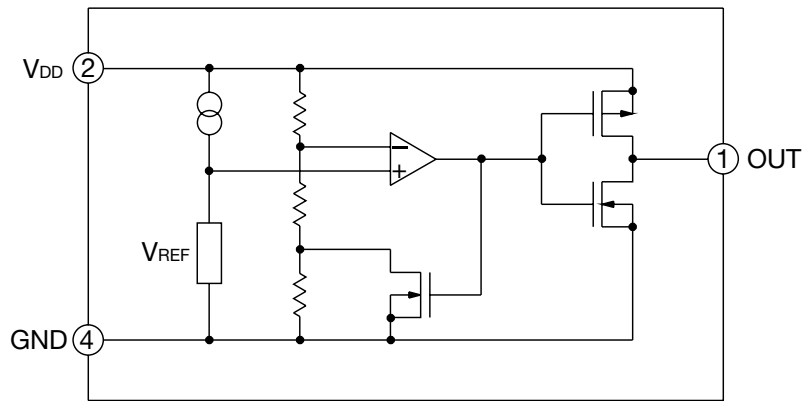

Pin Explanations

Pin No.	Pin Name	Functions
1	OUT	Reset Signal Output Pin
2	V _{DD}	V _{DD} Pin / Voltage Detect Pin
3	NC	
4	GND	GND Pin

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Rating	Unit
Operating Temperature	T _{OPR}	-30 ~ +85	°C
Storage Temperature	T _{STG}	-40 ~ +125	°C
Supply Voltage	V _{DD}	12	V
Output Voltage	V _{OUT}	V _{SS} - 0.3 ~ V _{DD} + 0.3	V
Output Current	I _{OUT}	70	mA
Power Dissipation	P _d	150	mW

Recommended Operating Conditions


Item	Symbol	Rating	Unit
Operating Temperature	T _{OPR}	-30 ~ +85	°C
Supply Voltage	V _{DD}	+0.70 ~ +10	V

Electrical Characteristics (Ta=25°C)


Product Name	Item												
	Output Current 1			Output Current 2			Output Current 3						
	I _{OUT1} (mA)			I _{OUT2} (mA)			I _{OUT3} (mA)						
	Test Circuit 3			Test Circuit 3			Test Circuit 4						
	Condition	Min.	Typ.	Condition	Min.	Typ.	Condition	Typ.	Max.				
PST3709	N-ch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	N-ch V _{DS} = 0.5V	V _{DD} = 0.85V	0.05	0.5	P-ch V _{DS} = -2.1V V _{DD} = 4.5V	1.0	2.0			
PST3710													
PST3711													
PST3712					V _{DD} = 1.0V	0.2	1.0						
PST3713													
PST3714													
PST3715													
PST3716													
PST3717													
PST3718													
PST3719													
PST3720													
PST3721													
PST3722													
PST3723													
PST3724													
PST3725													
PST3726													
PST3727													
PST3728													
PST3729													
PST3730													
PST3731													
PST3732													
PST3733					N-ch V _{DD} = 1.5V	1.0	2.0				P-ch V _{DS} = -2.1V V _{DD} = 8.0V	1.5	3.0
PST3734													
PST3735													
PST3736													
PST3737													
PST3738													
PST3739													
PST3740													
PST3741													
PST3742													
PST3743													
PST3744													
PST3745													
PST3746													
PST3747													
PST3748													
PST3749													
PST3750													
PST3751													
PST3752													
PST3753													
PST3754													
PST3755													
PST3756													
PST3757													
PST3758													
PST3759													
PST3760													

Measuring Circuit


(1)

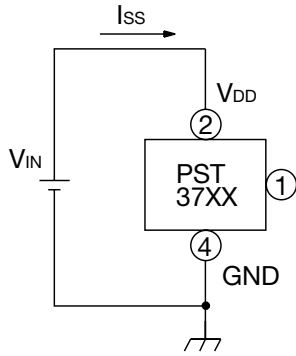


(2)

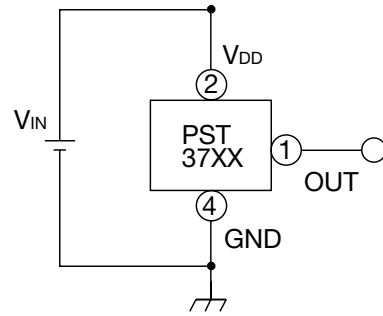


(3)

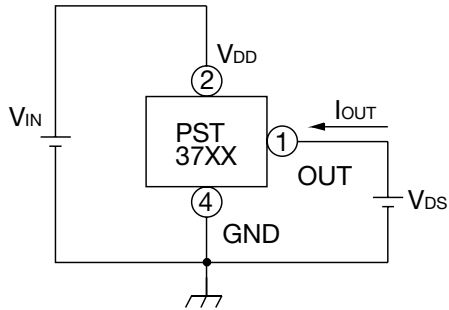

(4)

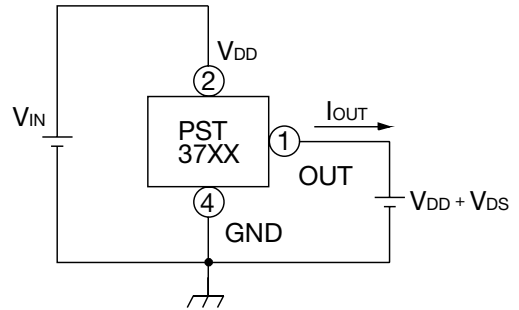


Application Circuits

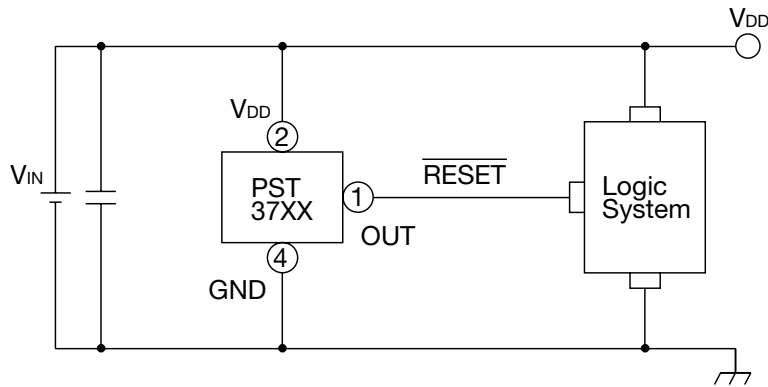


We shall not be liable for any trouble or damage caused by using this circuit.

In the event a problem which may affect industrial property or any other rights of us or a third party is encountered during the use of information described in these circuit, Mitsumi Electric Co., Ltd. shall not be liable for any such problem, nor grant a license therefore.

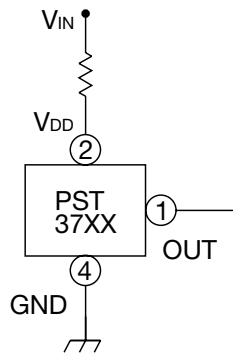


Please note that there is any possibility of circuit oscillation when resistance put in the line V_{IN}.

Timing Chart

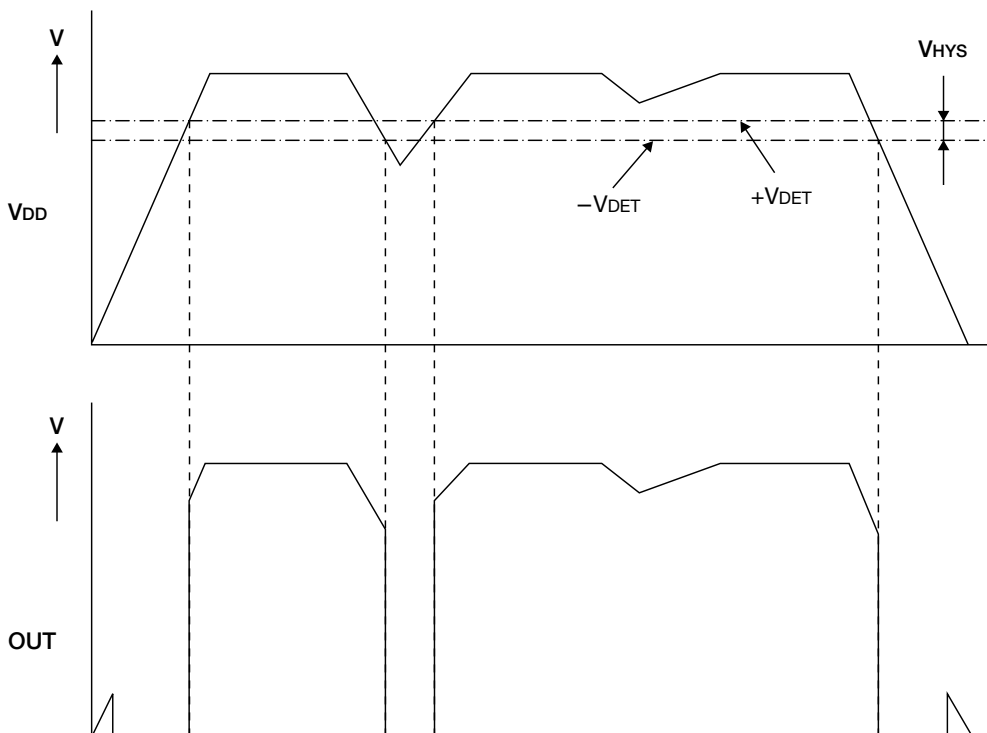


Characteristics Typical Performance Characteristics 0.9V


■ Detecting Voltage

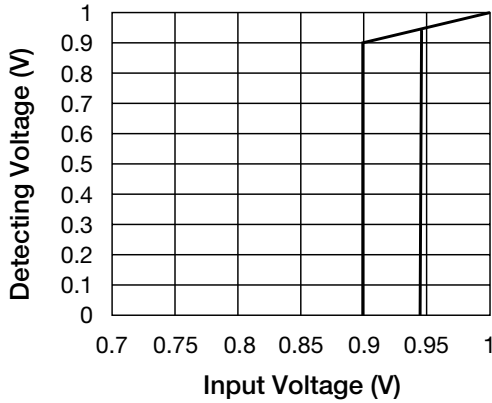


■ Supply Current

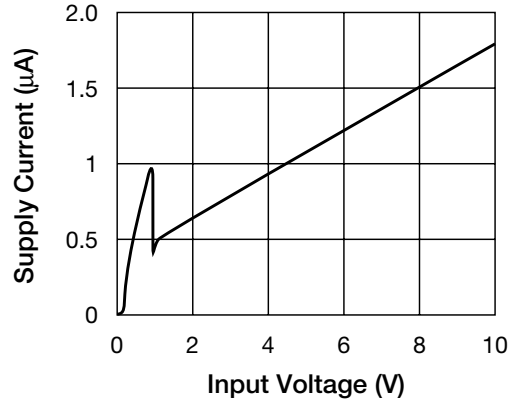


■ Detecting Voltage vs Temperature

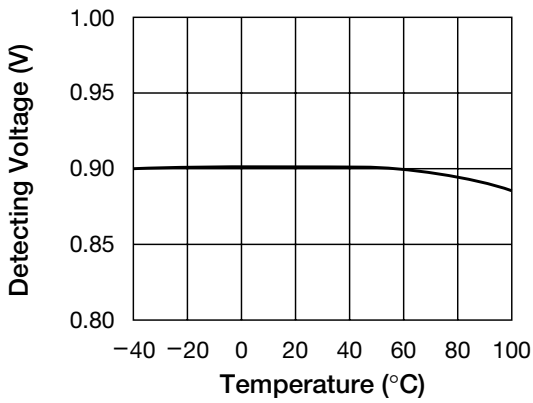


■ Hysteresis Voltage vs Temperature

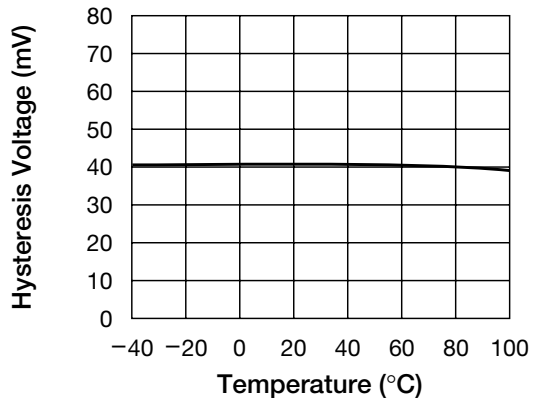

■ Output Current1 (N-ch) vs Temperature (V_{DD} = 0.7V, V_{DS} = 0.05V)

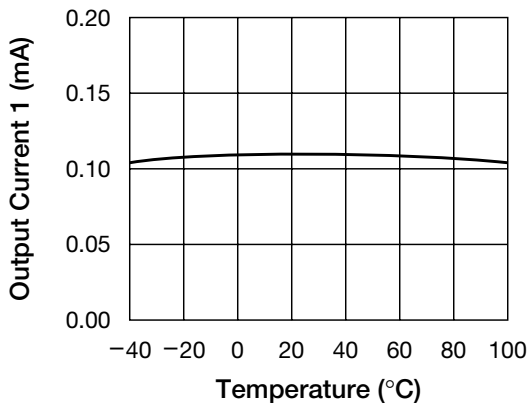


■ Output Current3 (P-ch) vs Temperature (V_{DD} = 4.5V, V_{DS} = -2.1V)

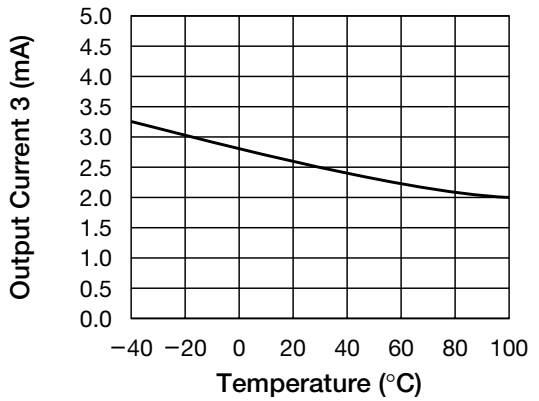


note : these are typical characteristics

Characteristics Typical Performance Characteristics 2.8V


■ Detecting Voltage

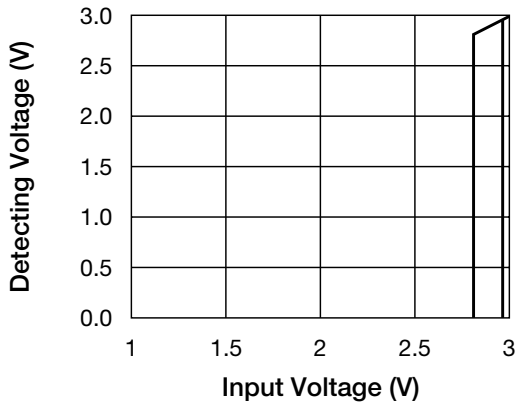


■ Supply Current

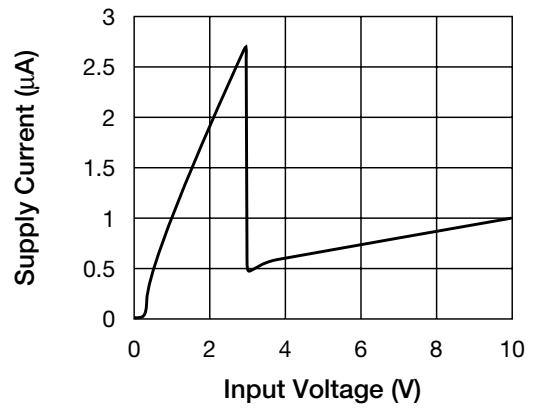


■ Detecting Voltage vs Temperature

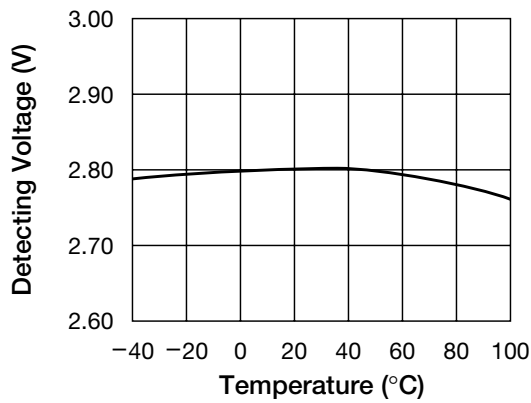


■ Hysteresis Voltage vs Temperature

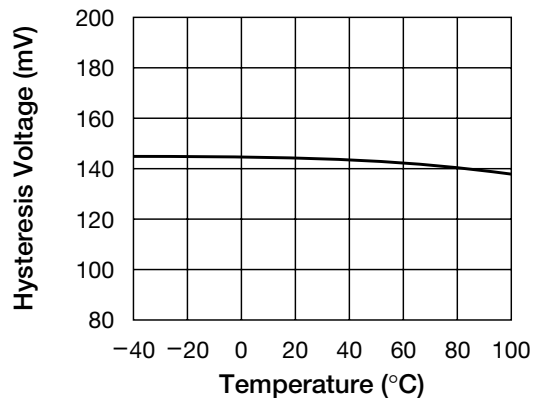

■ Output Current1 (N-ch) vs Temperature ($V_{DD} = 0.7V, V_{DS} = 0.05V$)

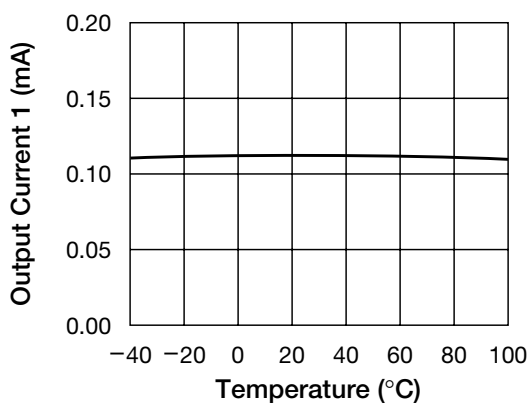


■ Output Current3 (P-ch) vs Temperature ($V_{DD} = 4.5V, V_{DS} = -2.1V$)

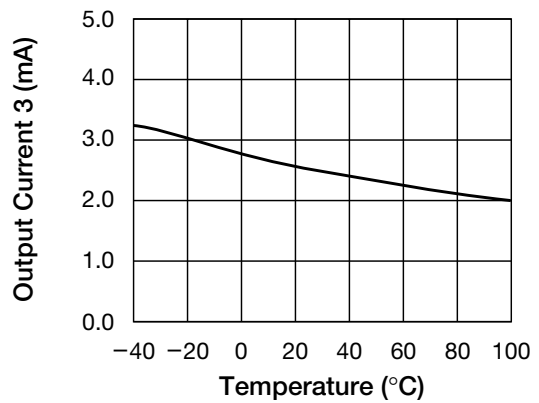


note : these are typical characteristics

Characteristics Typical Performance Characteristics 4.6V


■ Detecting Voltage

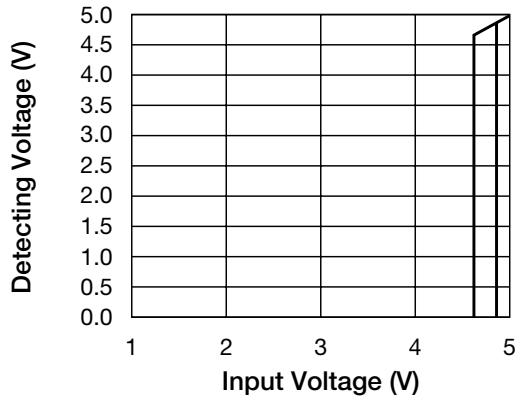


■ Supply Current

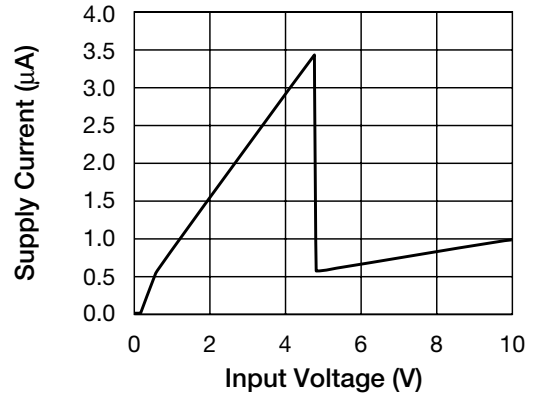


■ Detecting Voltage vs Temperature

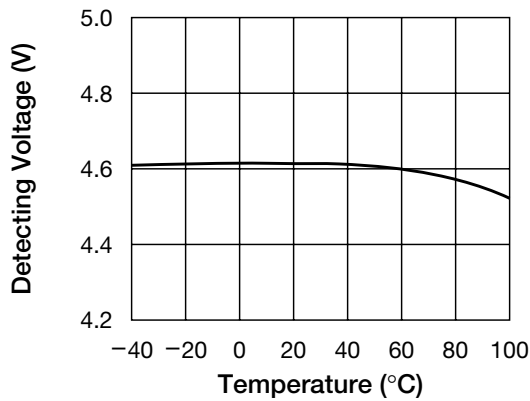

■ Hysteresis Voltage vs Temperature

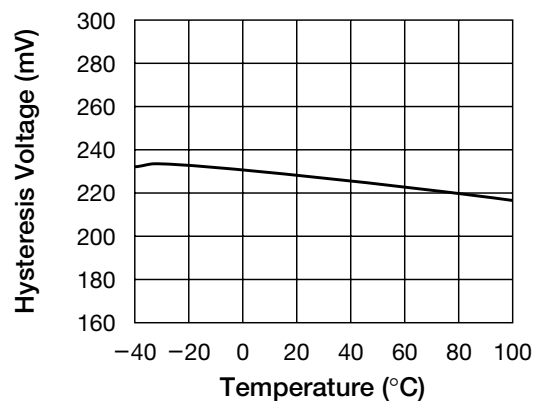

■ Output Current1 (N-ch) vs Temperature ($V_{DD} = 0.7V, V_{DS} = 0.05V$)

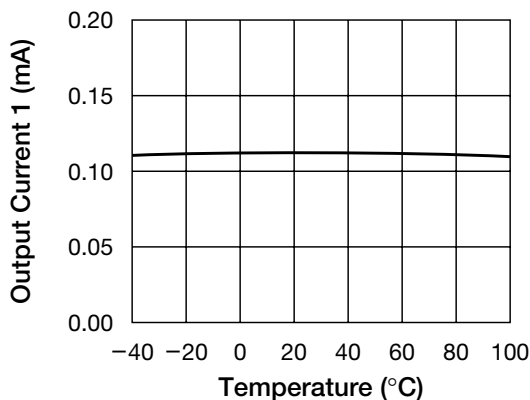

■ Output Current3 (P-ch) vs Temperature ($V_{DD} = 4.5V, V_{DS} = -2.1V$)

