

**Features**

- Frequency Range: 3 – 400 MHz
- Impedance Ratio: 1:2, Unbalanced to Balanced
- Industry Standard SMT package
- Available in Tape-and –Reel
- Low Cost

**SURFACE MOUNT TRANSFORMER**



**Description**

The XFK-0401-2W transformer is designed for applications that require small, low cost, and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems.


**Specifications**

| Parameter             | Minimum                | Maximum |
|-----------------------|------------------------|---------|
| Frequency Range (MHz) | 3.0                    | 400     |
| Insertion Loss <1dB   | -                      | -       |
| Insertion Loss <2dB   | 3.0                    | 400     |
| Insertion Loss <3dB   | -                      | -       |
| Impedance ratio       | 1:2                    |         |
| Type                  | Unbalanced to Balanced |         |


**Absolute Maximum Ratings**

| Parameter             | Maximum        |
|-----------------------|----------------|
| RF Power              | +33 dBm        |
| Operating Temperature | -55 to +100 °C |
| Storage Temperature   | -55 to +100 °C |
| Re-flow Temperature   | + 240 °C       |

**Schematic**

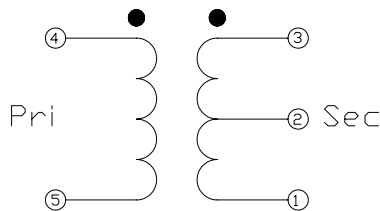


**Package – S01**

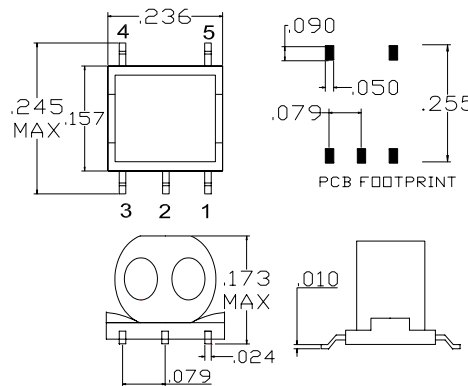

**Pin Functions**

| Function      | Pin |
|---------------|-----|
| SECONDARY     | 1   |
| SECONDARY CT  | 2   |
| SECONDARY DOT | 3   |
| PRIMARY DOT   | 4   |
| PRIMARY       | 5   |

Typical Test Data – Insertion Loss of two units back-to-back @ 25°C. Primary Impedance 50 Ohms.

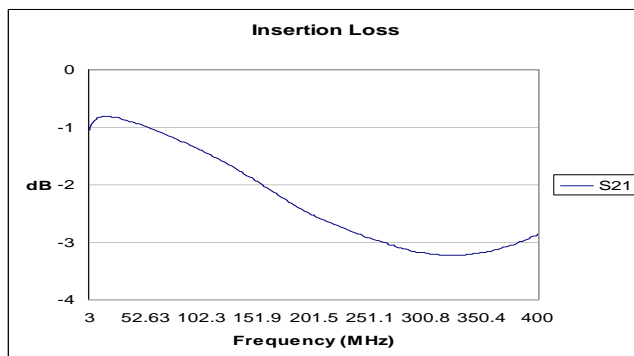

Specifications and information on this data sheet are subject to change without notice.