

PD410PI


High Speed Photodiode

■ Features

- Peak sensitivity wavelength matching with infrared LED($\lambda_p = 1000\text{nm}$)
- Built-in visible light cut-off filter

■ Outline Dimensions

(Unit : mm)

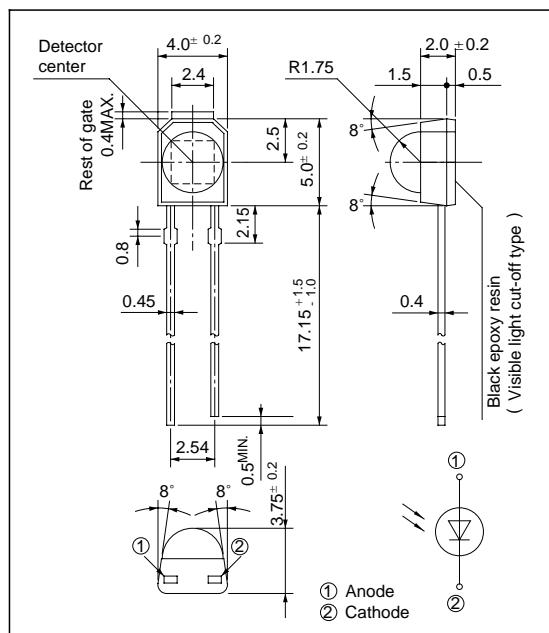

■ Applications

- Infrared remote controllers for TVs, VCRs, audio equipment and air conditioners, etc.

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	Rating	Unit
Reverse voltage	V _R	32	V
Power dissipation	P	150	mW
Operating temperature	T _{opr}	-25 to +85	°C
Storage temperature	T _{stg}	-40 to +100	°C
* ¹ Soldering temperature	T _{sol}	260	°C

*¹ For 5 seconds at the position of 2.15mm from the bottom face of resin package

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Shortcircuit current	I _{SC}	E _V = 100 lx	2.5	3.0	4.5	µA
Short-circuit current temperature coefficient	β _T	E _V = 100 lx	-	0.2	-	% /°C
Dark current	I _d	V _R = 10V, E _V = 0	-	0.5	10	nA
Dark current temperature coefficient	α _T	V _R = 10V, E _V = 0	-	3.5	5.0	times/10°C
Terminal capacitance	C _t	V _R = 3V, f = 1MHz	-	20	35	pF
Peak sensitivity wavelength	λ _p	-	-	1000	-	nm
Peak spectral sensitivity	K	λ = 1000nm	-	1	-	A/W
Half intensity angle	Δθ	-	-	± 45	-	°
Response time	t _r , t _f	R _L = 1kΩ, V _R = 10V	-	200	-	ns

¹ In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP's device.

Fig. 1 Power Dissipation vs. Ambient Temperature

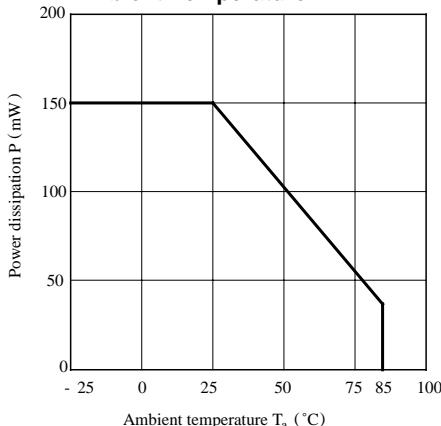


Fig. 2 Spectral Sensitivity

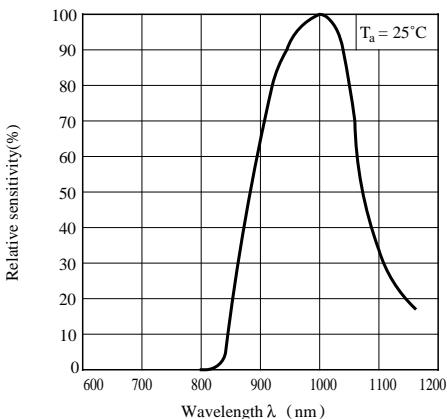


Fig. 3 Dark Current vs. Ambient Temperature

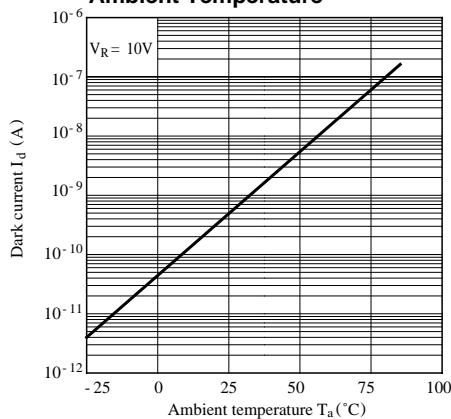


Fig. 4 Dark Current vs. Reverse Voltage

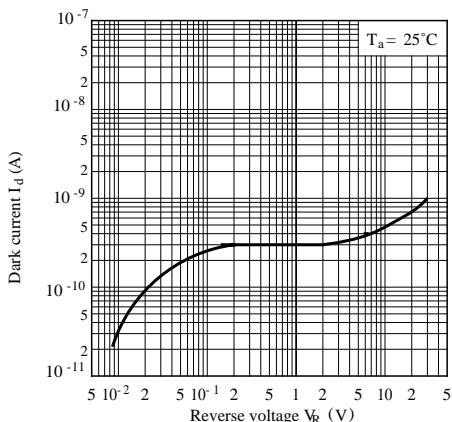


Fig. 5 Terminal Capacitance vs. Reverse Voltage

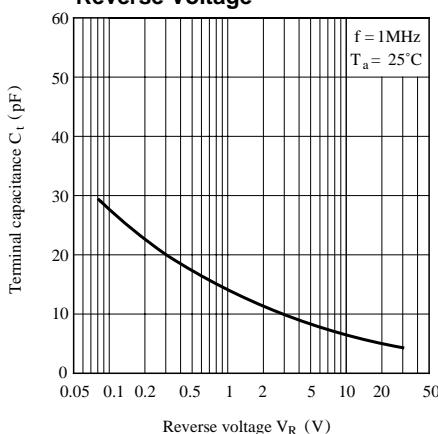


Fig. 6 Relative Output vs. Ambient Temperature
(Emitter : GL537/GL538)
Detector : PD410PI

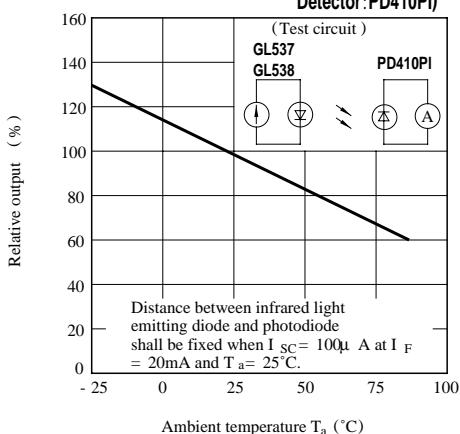
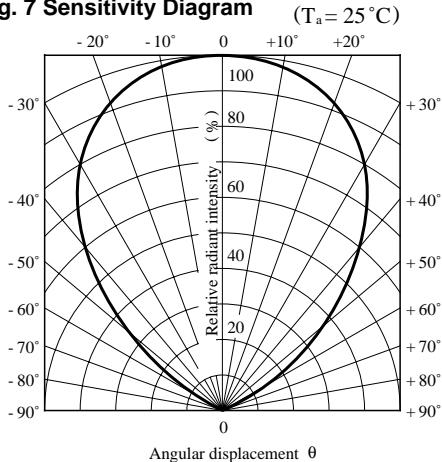
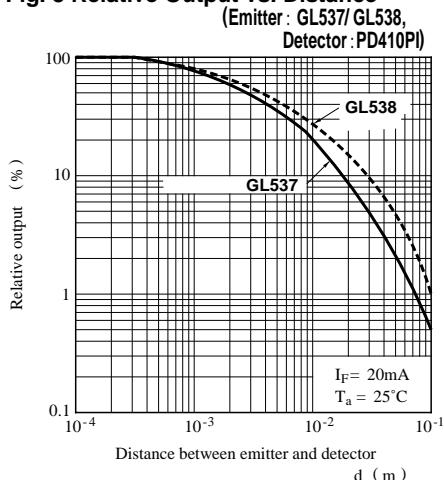
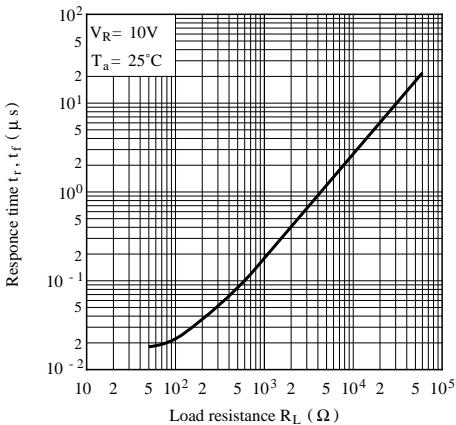
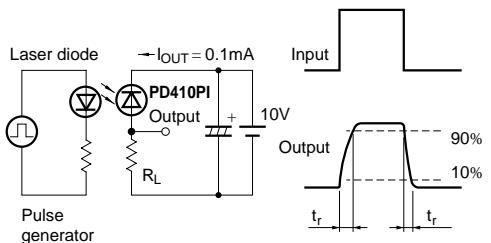


Fig. 7 Sensitivity Diagram**Fig. 8 Relative Output vs. Distance****Fig. 9 Response Time vs. Load Resistance****Test Circuit for Response Time**

- Please refer to the chapter "Precautions for Use."