






SAW Components

Datasheet B7661



Chip Sized SAW Package QCS9A
Features

- Low-loss duplexer for W-CDMA 800MHz band mobile telephone systems
- Package for **Surface Mounted Technology (SMT)**
- Small size and low height

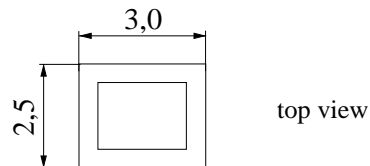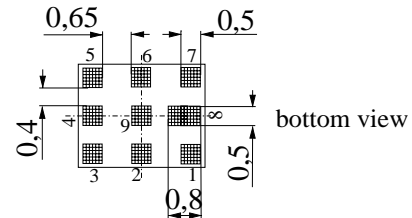


Dimensions in mm, approx. weight 0,015 g

Terminals

Ni, gold-plated

Pin configuration

- | | |
|---------|-----------|
| 6 | TX Input |
| 2 | RX Output |
| 4 | Antenna |
| 1, 3, 5 | Ground |
| 7, 8, 9 | Ground |

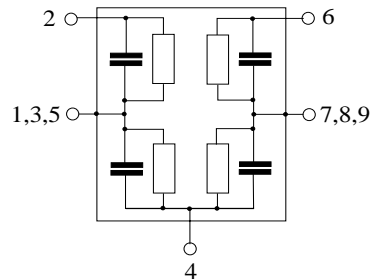

Type	Ordering code	Marking and Package according to	Packing according to
B7661	B39881-B7661-D610	C61157-A3-A8	F61074-V8156-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operating temperature range	T	- 30/+ 85	°C	machine model, 10 pulses source and load impedance 50 Ω } continuous wave
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	100 ¹⁾	V	
Input power max.	P_{IN}	30	dBm	
830,0 ... 840,0 MHz elsewhere		10	dBm	

1) -acc. to JESD22-115A (Machine Model), 10 negative & 10 positive pulses



Datasheet



Characteristics

Operating temperature range $T = 25 \pm 2^\circ \text{C}$
 ANT terminating impedance $Z_{\text{ANT}} = 50 \Omega, 8,2 \text{ nH}$ (in parallel)
 RX terminating impedance $Z_{\text{RX}} = 50 \Omega$
 TX terminating impedance $Z_{\text{TX}} = 40 \Omega, 8 \text{ nH}$ (in series)

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	835,00	—	MHz
Maximum insertion attenuation	α_{max}				
	830,00 ... 840,00 MHz	—	1,5	1,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	830,00 ... 840,00 MHz	—	0,2	1,0	dB
Return loss					
	830,00 ... 840,00 MHz	10,0	17,0	—	dB
Attenuation	α				
	40,00 ... 400,00 MHz	30	40	—	dB
	400,00 ... 500,00 MHz	25	36	—	dB
	875,00 ... 885,00 MHz	50	55	—	dB
	1210,00 ... 1400,00 MHz	20	32	—	dB
	1590,00 ... 1680,00 MHz	25	38	—	dB
	1680,00 ... 1980,00 MHz	27	42	—	dB
	2490,00 ... 2520,00 MHz	35	52	—	dB
Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	880,00	—	MHz
Maximum insertion attenuation	α_{max}				
	875,00 ... 885,00 MHz	—	2,3	2,4	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	875,00 ... 885,00 MHz	—	0,5	0,9	dB
	880,00 ... 885,00 MHz	—	0,3	0,5	dB
Return loss					
	875,00 ... 885,00 MHz	10,0	12,0	—	dB
Attenuation	α				
	40,00 ... 50,00 MHz	55	80	—	dB
	785,00 ... 795,00 MHz	35	46	—	dB
	830,00 ... 840,00 MHz	55	58	—	dB
	852,50 ... 862,50 MHz	1,5	3,0	—	dB
	1000,00 ... 1705,00 MHz	35	43	—	dB
	1705,00 ... 1770,00 MHz	45	57	—	dB
	2535,00 ... 2565,00 MHz	25	43	—	dB
	2625,00 ... 2655,00 MHz	32	40	—	dB
	3500,00 ... 3540,00 MHz	20	24	—	dB
	4375,00 ... 4425,00 MHz	15	25	—	dB
	5230,00 ... 5310,00 MHz	15	24	—	dB
	6125,00 ... 6195,00 MHz	—	22	—	dB



SAW Components

B7661

Low-Loss Filter for Mobile Communication

835,0 / 880,0 MHz

Datasheet



Characteristics ANT - RX		min.	typ.	max.	
Attenuation	α				
	7000,00 ... 7080,00 MHz	—	20	—	dB
	7875,00 ... 7965,00 MHz	—	16	—	dB
	8750,00 ... 8850,00 MHz	—	17	—	dB
	9625,00 ... 9735,00 MHz	—	13	—	dB
	10500,00 ... 10620,00 MHz	—	17	—	dB
	11375,00 ... 11505,00 MHz	—	18	—	dB
	12250,00 ... 12390,00 MHz	—	18	—	dB

Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path	α				
	830,00 ... 840,00 MHz	55	58	—	dB
	875,00 ... 885,00 MHz	50	53	—	dB



Datasheet



Characteristics

Operating temperature range $T = -30$ to 85°C
 ANT terminating impedance $Z_{\text{ANT}} = 50\ \Omega, 8,2\ \text{nH}$ (in parallel)
 RX terminating impedance $Z_{\text{RX}} = 50\ \Omega$
 TX terminating impedance $Z_{\text{TX}} = 40\ \Omega, 8\ \text{nH}$ (in series)

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	835,00	—	MHz
Maximum insertion attenuation	α_{max}				
	830,00 ... 840,00 MHz	—	1,6	2,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	830,00 ... 840,00 MHz	—	0,2	1,2	dB
Return loss					
	830,00 ... 840,00 MHz	10,0	17,0	—	dB
Attenuation	α				
	40,00 ... 400,00 MHz	30	40	—	dB
	400,00 ... 500,00 MHz	25	36	—	dB
	875,00 ... 885,00 MHz	48	52	—	dB
	1210,00 ... 1400,00 MHz	20	32	—	dB
	1590,00 ... 1680,00 MHz	25	38	—	dB
	1680,00 ... 1980,00 MHz	27	42	—	dB
	2490,00 ... 2520,00 MHz	35	52	—	dB
Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	880,00	—	MHz
Maximum insertion attenuation	α_{max}				
	875,00 ... 885,00 MHz	—	2,3	2,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	875,00 ... 885,00 MHz	—	0,6	1,6	dB
Return loss					
	875,00 ... 885,00 MHz	10,0	12,0	—	dB
Attenuation	α				
	40,00 ... 50,00 MHz	55	80	—	dB
	785,00 ... 795,00 MHz	30	46	—	dB
	830,00 ... 840,00 MHz	55	58	—	dB
	852,50 ... 862,50 MHz	1,5	3,0	—	dB
	1000,00 ... 1705,00 MHz	35	43	—	dB
	1705,00 ... 1770,00 MHz	45	57	—	dB
	2535,00 ... 2565,00 MHz	25	43	—	dB
	2625,00 ... 2655,00 MHz	32	40	—	dB
	3500,00 ... 3540,00 MHz	20	24	—	dB
	4375,00 ... 4425,00 MHz	15	25	—	dB
	5230,00 ... 5310,00 MHz	15	24	—	dB
	6125,00 ... 6195,00 MHz	—	22	—	dB



SAW Components

B7661

Low-Loss Filter for Mobile Communication

835,0 / 880,0 MHz

Datasheet




Characteristics ANT - RX		min.	typ.	max.	
Attenuation	α				
	7000,00 ... 7080,00 MHz	—	28	—	dB
	7875,00 ... 7965,00 MHz	—	16	—	dB
	8750,00 ... 8850,00 MHz	—	17	—	dB
	9625,00 ... 9735,00 MHz	—	13	—	dB
	10500,00 ... 10620,00 MHz	—	17	—	dB
	11375,00 ... 11505,00 MHz	—	18	—	dB
	12250,00 ... 12390,00 MHz	—	18	—	dB

Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path	α				
	830,00 ... 840,00 MHz	55	58	—	dB
	875,00 ... 885,00 MHz	48	51	—	dB

Matching circuit to terminating impedances

(Element values depend upon PCB layout)

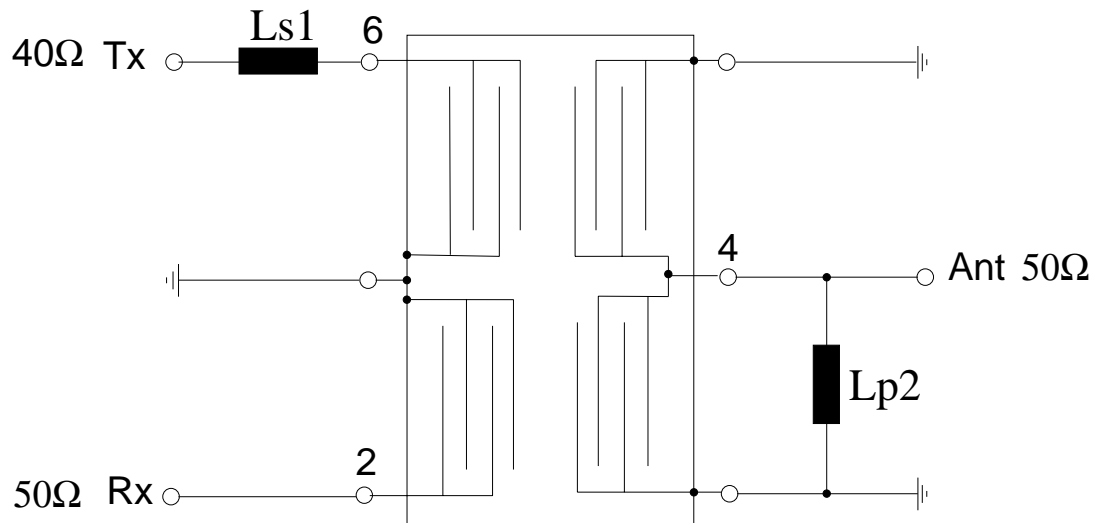


$$L_{s1} = 8.0 \text{ nH}$$


$$L_{p2} = 8.2 \text{ nH}$$



Frequency Response TX - ANT

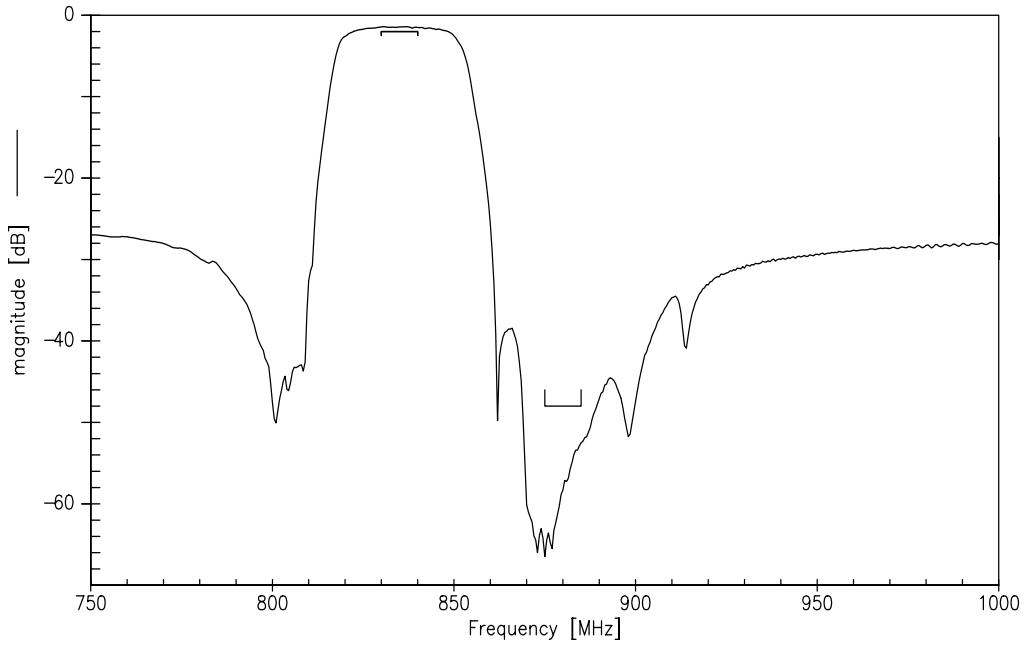


Frequency Response TX - ANT (wideband)

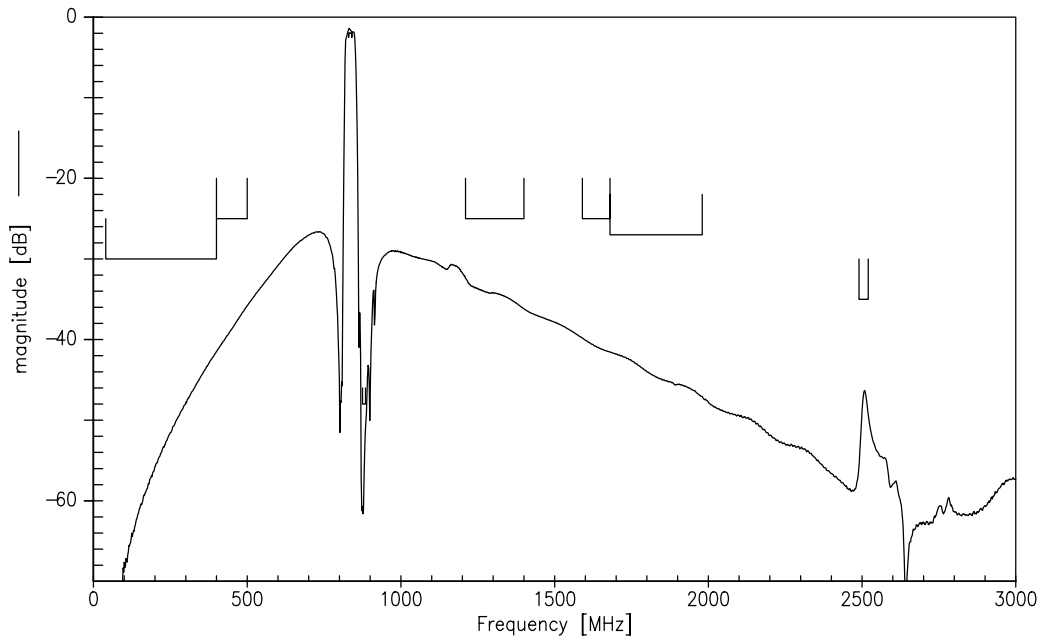




Frequency Response ANT - RX

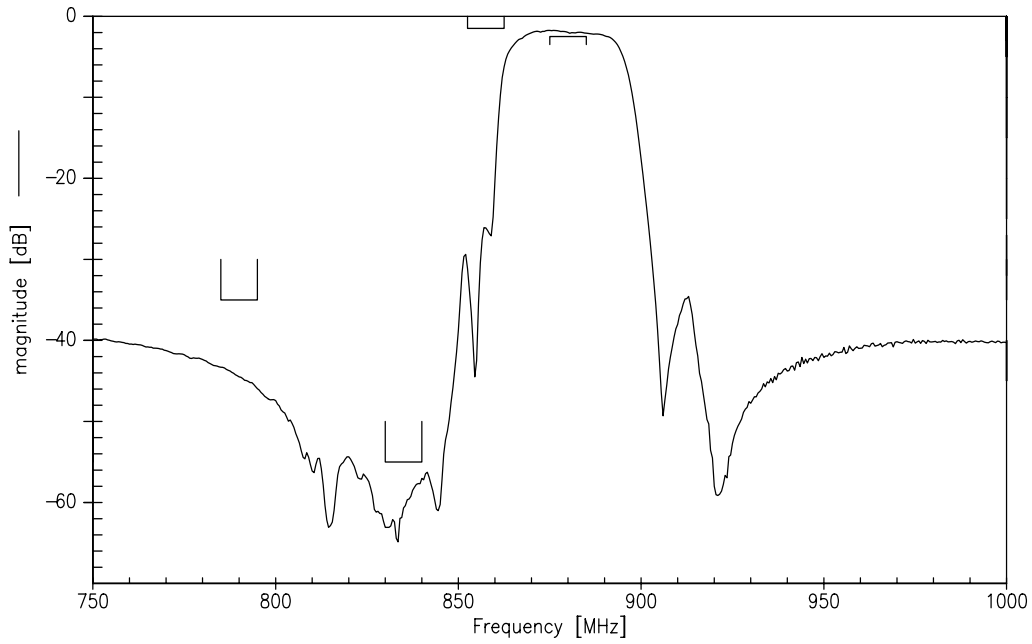

Frequency Response ANT - RX (wideband)

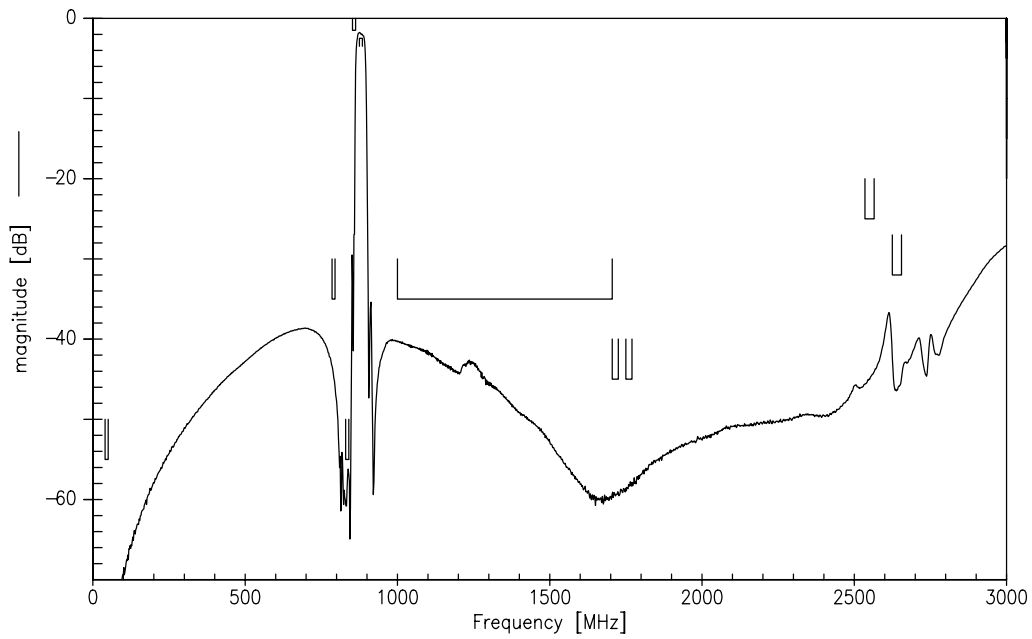



SAW Components

B7661


Low-Loss Filter for Mobile Communication

835,0 / 880,0 MHz

Datasheet




Frequency Response ANT - RX

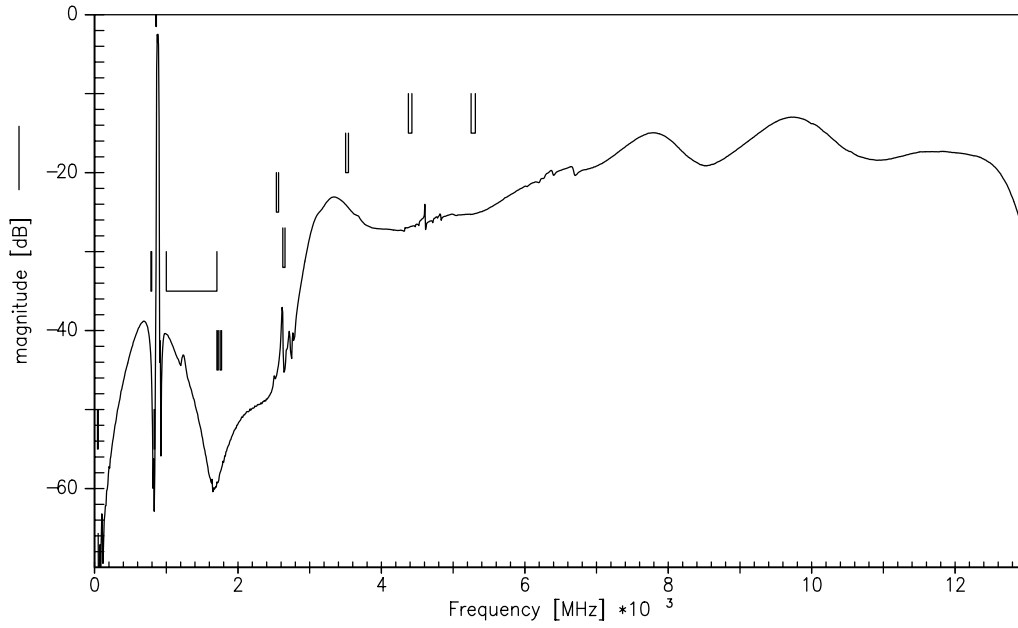




Frequency Response TX - RX

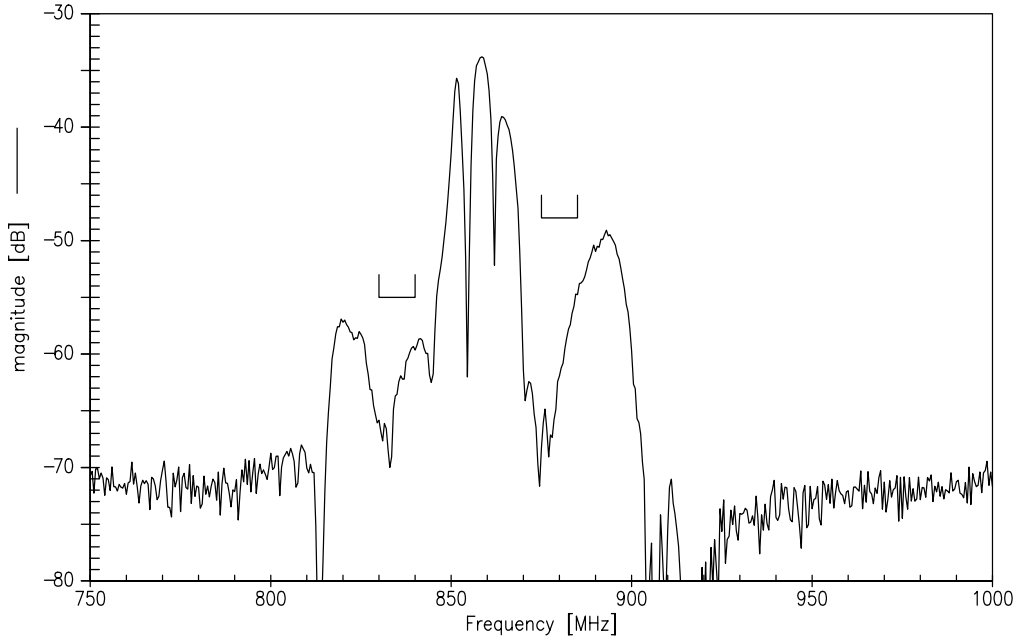

Frequency Response TX - RX (wideband)

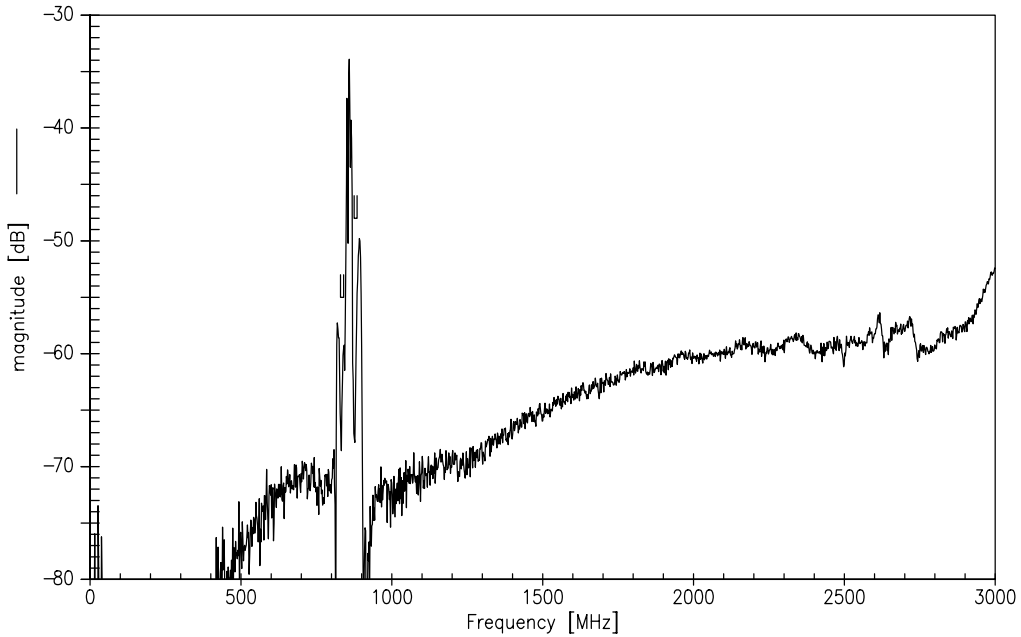



SAW Components

B7661

Low-Loss Filter for Mobile Communication

835,0 / 880,0 MHz

Datasheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.