



Silicon Schottky Diode

- Low barrier diode for detectors up to GHz frequencies

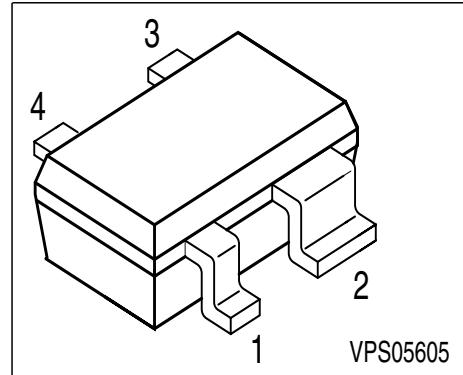

EHA07008

ESD: Electrostatic discharge sensitive device, observe handling precaution!

Type	Marking	Pin Configuration				Package
BAT 62-07W	62s	1=C1	2=C2	3=A2	4=A1	SOT-343

Maximum Ratings

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	40	V
Forward current	I_F	20	mA
Total power dissipation, $T_S = 103 \text{ }^\circ\text{C}$	P_{tot}	100	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance


Junction - ambient 1)	R_{thJA}	≤ 630	K/W
Junction - soldering point	R_{thJS}	≤ 470	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics					
Reverse current $V_R = 40 \text{ V}$	I_R	-	-	10	μA
Forward voltage $I_F = 2 \text{ mA}$	V_F	-	0.58	1	V
AC characteristics					
Diode capacitance $V_R = 0 \text{ V}, f = 1 \text{ MHz}$	C_T	-	0.35	0.6	pF
Case capacitance $f = 1 \text{ MHz}$	C_C	-	0.1	-	
Differential resistance $V_R = 0, f = 10 \text{ kHz}$	R_0	-	225	-	$\text{k}\Omega$
Series inductance	L_s	-	1.8	-	nH


Forward current $I_F = f(T_A^*; T_S)$

* mounted on alumina

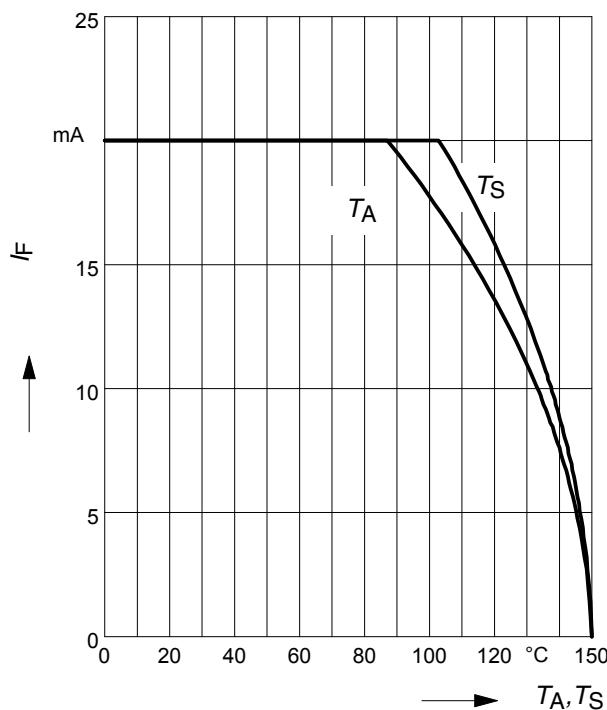


Forward current $I_F = f(V_F)$

T_A = parameter

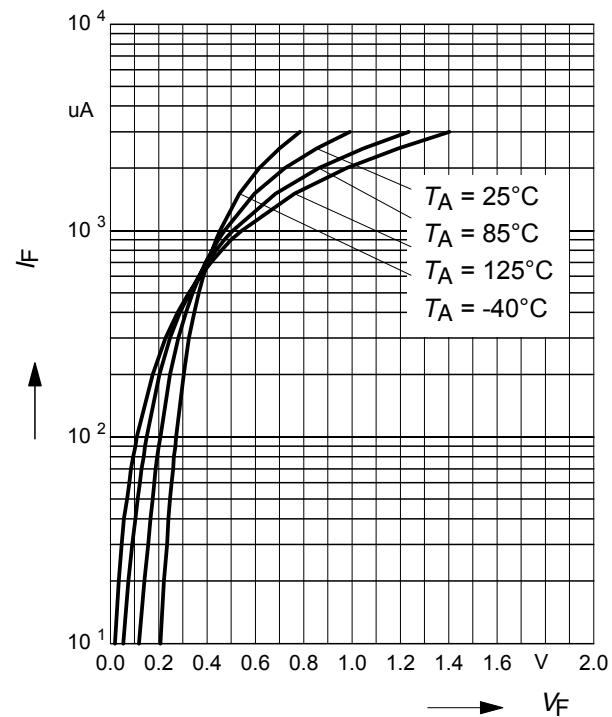


Permissible Pulse Load

$I_{F\max} / I_{FDC} = f(t_p)$

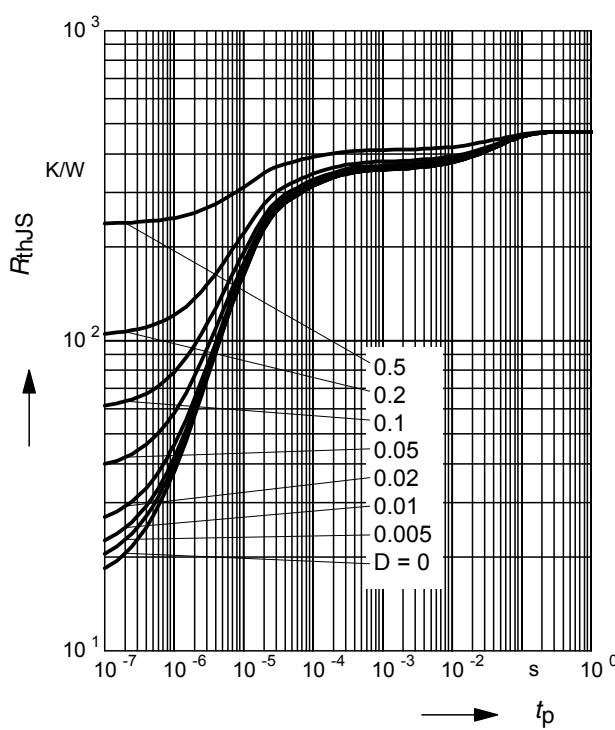


Permissible pulse load $I_{F\max}/I_{FDC} = f(t_p)$

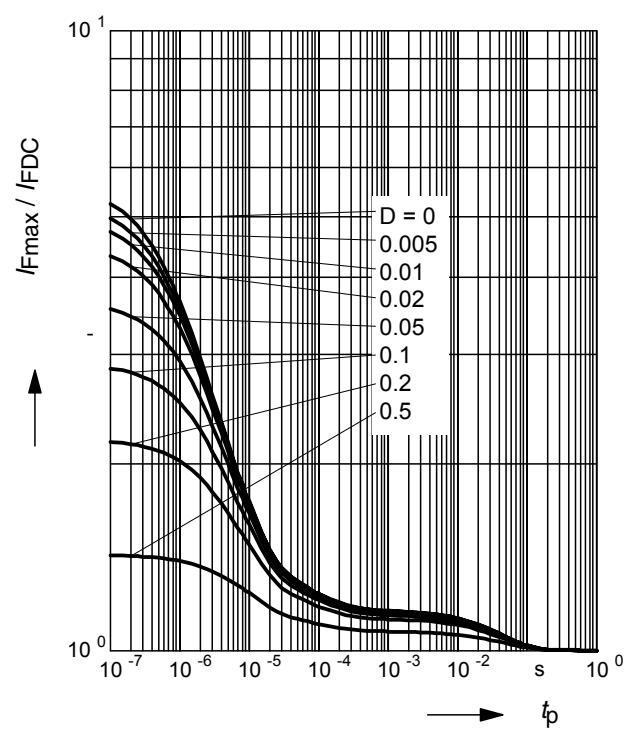


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

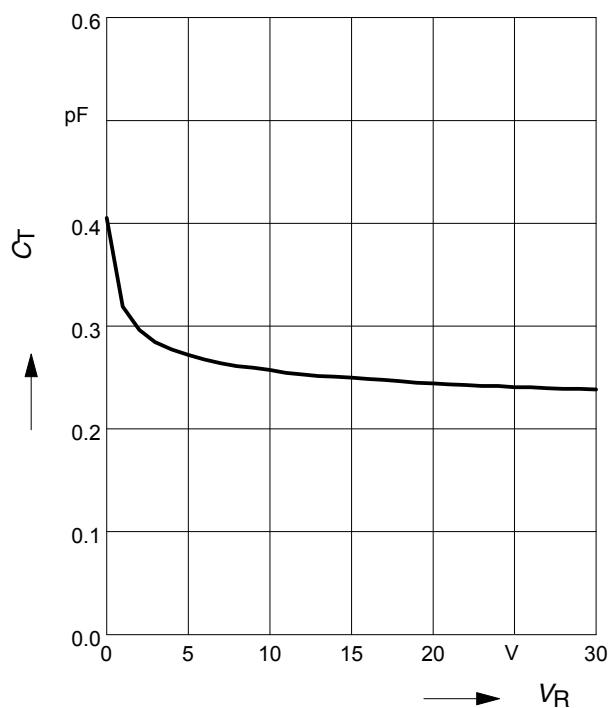

Reverse current $I_R = f(V_R)$


$T_A = \text{Parameter}$

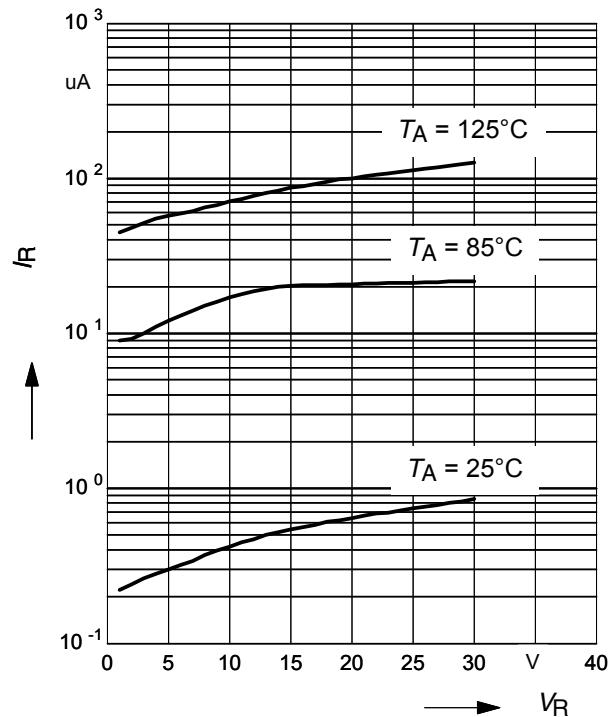

Rectifier voltage $V_{\text{out}} = f(V_{\text{in}})$

$f = 900\text{ MHz}$

$R_L = \text{parameter in k}\Omega$

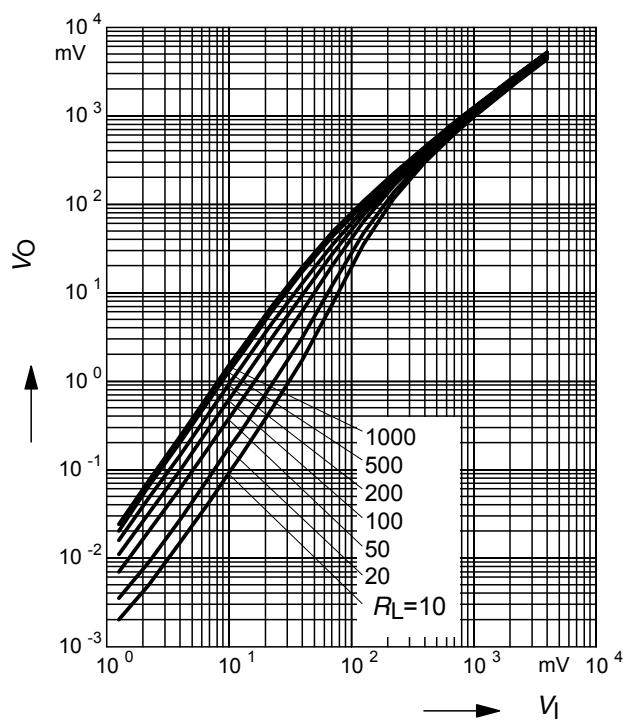

Testcircuit:

