



SAW Components

Data Sheet B7834





SAW Components

B7834

Low-Loss Filter for Mobile Communication

1960,0 MHz




Data Sheet



Chip sized SAW package QCS5C

Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Usable passband 60 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50Ω to 100Ω
- Package for **Surface Mounted Technology (SMT)**

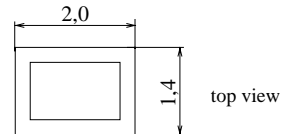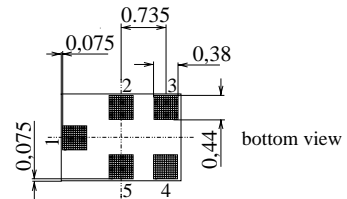


Terminals

- Gold-plated Ni

Dimensions in mm, approx. weight 0,007 g

Pin configuration

- 1 Input, unbalanced
- 2, 5 Input ground
- 3, 4 Output, balanced
- 2, 5 To be grounded

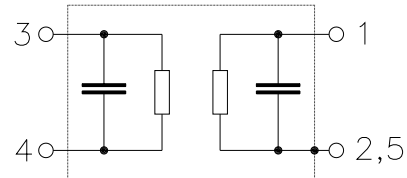

Type	Ordering code	Marking and Package according to	Packing according to
B7834	B39202-B7834-C710	C61157-A7-A111	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40/+ 85	°C	Machine Model, 10 pulses
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}	50*	V	
Input power	P_S	10	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



Data Sheet



Characteristics

Operating temperature range: $T = 25\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 100\ \Omega$ (balanced) || 22 nH

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,8	3,0	dB
1930,0 ... 1990,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,1	1,5	dB
1930,0 ... 1990,0 MHz					
Input VSWR		—	1,8	2,1	
1930,0 ... 1990,0 MHz					
Output VSWR		—	1,8	2,1	
1930,0 ... 1990,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	0	10	degree
1930,0 ... 1990,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-1,5	0	1,5	dB
1930,0 ... 1990,0 MHz					
Attenuation	α				
10,0 ... 1000,0 MHz		40	58	—	dB
1000,0 ... 1850,0 MHz		30	35	—	dB
1850,0 ... 1910,0 MHz		18	20	—	dB
2040,0 ... 3980,0 MHz		25	28	—	dB
3980,0 ... 6000,0 MHz		35	60	—	dB



Data Sheet




Characteristics

Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50$ Ω
 Terminating load impedance: $Z_L = 100$ Ω (balanced) || 22 nH


		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	α_{max}	—	2,8	4,0	dB
1930,0 ... 1990,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,1	2,5	dB
1930,0 ... 1990,0 MHz					
Input VSWR		—	1,8	2,2	
1930,0 ... 1990,0 MHz					
Output VSWR		—	1,8	2,2	
1930,0 ... 1990,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	0	10	degree
1930,0 ... 1990,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-1,5	0	1,5	dB
1930,0 ... 1990,0 MHz					
Attenuation	α				
10,0 ... 1000,0 MHz		40	58	—	dB
1000,0 ... 1850,0 MHz		30	35	—	dB
1850,0 ... 1910,0 MHz		18	20	—	dB
2040,0 ... 3980,0 MHz		25	28	—	dB
3980,0 ... 6000,0 MHz		35	60	—	dB



Transfer function (measured at room temperature):

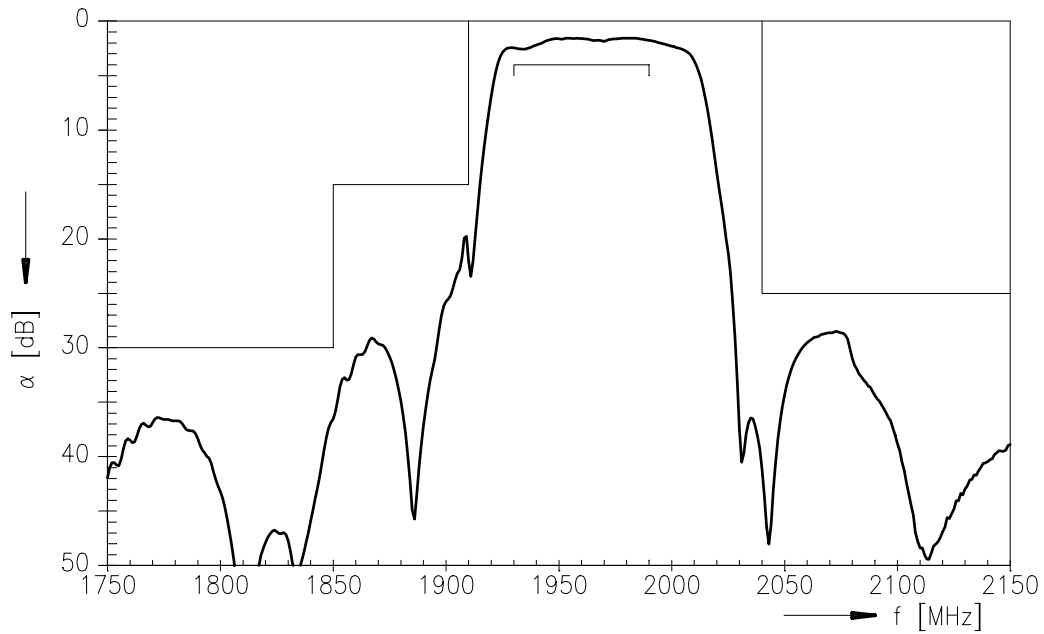

Transfer function (wideband, measured at room temperature):

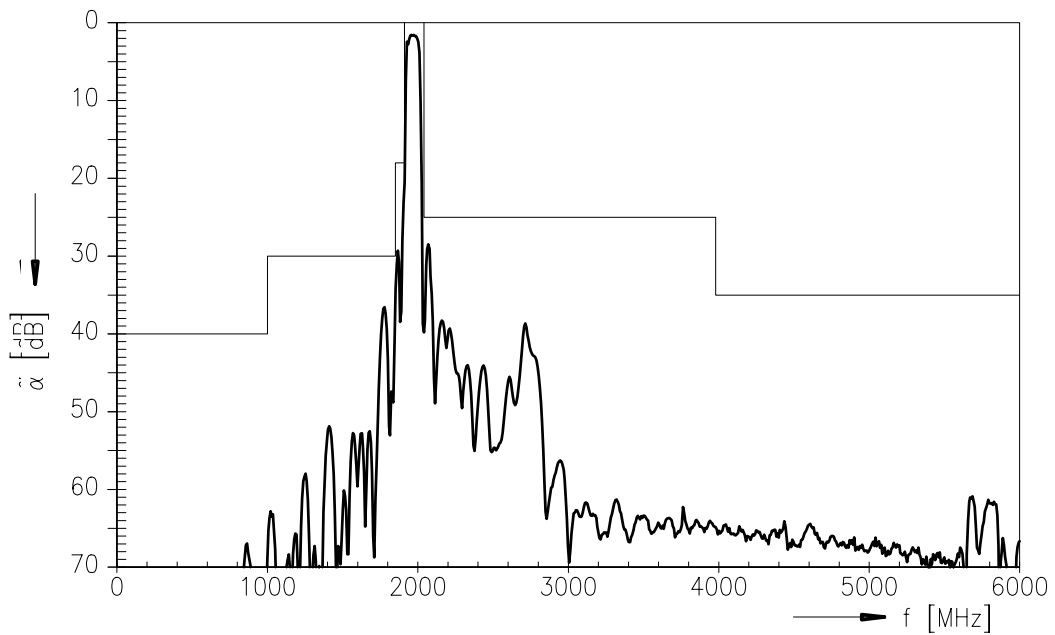



SAW Components

B7834

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.