

# UNR9111/9112/9113/9114/9115/9116/9117/9118/9119/9110/ 911D/911E/911F/911H/911L/911AJ/911BJ/911CJ (UN9111/9112/9113/9114/9115/9116/9117/9118/9119/9110/911D/911E/ 911F/911H/911L/911AJ/911BJ/911CJ)

Silicon PNP epitaxial planer transistor

For digital circuits

**Features**



- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- SS-Mini type package, allowing automatic insertion through tape packing and magazine packing.

**Resistance by Part Number**


	Marking Symbol	(R <sub>1</sub> )	(R <sub>2</sub> )
• UNR9111	6A	10kΩ	10kΩ
• UNR9112	6B	22kΩ	22kΩ
• UNR9113	6C	47kΩ	47kΩ
• UNR9114	6D	10kΩ	47kΩ
• UNR9115	6E	10kΩ	—
• UNR9116	6F	4.7kΩ	—
• UNR9117	6H	22kΩ	—
• UNR9118	6I	0.51kΩ	5.1kΩ
• UNR9119	6K	1kΩ	10kΩ
• UNR9110	6L	47kΩ	—
• UNR911D	6M	47kΩ	10kΩ
• UNR911E	6N	47kΩ	22kΩ
• UNR911F	6O	4.7kΩ	10kΩ
• UNR911H	6P	2.2kΩ	10kΩ
• UNR911L	6Q	4.7kΩ	4.7kΩ
• UNR911AJ	6X	100kΩ	100kΩ
• UNR911BJ	6Y	100kΩ	—
• UNR911CJ	6Z	—	47kΩ

**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V <sub>CBO</sub>	-50	V
Collector to emitter voltage	V <sub>CEO</sub>	-50	V
Collector current	I <sub>C</sub>	-100	mA
Total power dissipation	P <sub>T</sub>	125	mW
Junction temperature	T <sub>j</sub>	125	°C
Storage temperature	T <sub>stg</sub>	-55 to +125	°C

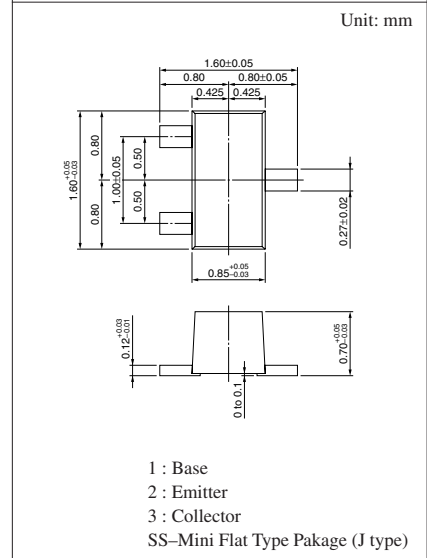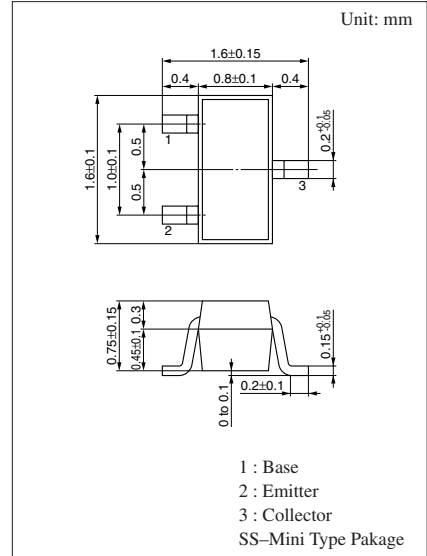

**Internal Connection**

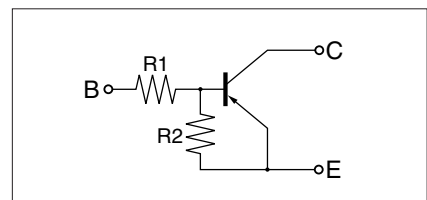

Note.) The Part numbers in the Parenthesis show conventional part number.

■ Electrical Characteristics (T<sub>a</sub>=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit	
Collector cutoff current		I <sub>CBO</sub>	V <sub>CB</sub> = -50V, I <sub>E</sub> = 0			-0.1	μA	
		I <sub>CEO</sub>	V <sub>CE</sub> = -50V, I <sub>B</sub> = 0			-0.5	μA	
Emitter cutoff current	UNR9111	I <sub>EBO</sub>	V <sub>EB</sub> = -6V, I <sub>C</sub> = 0			-0.5	mA	
	UNR9112/9114/911E/911D					-0.2		
	UNR9113/UNR911AJ					-0.1		
	UNR9115/9116/9117/9110/UNR911BJ					-0.01		
	UNR911F/911H					-1.0		
	UNR9119					-1.5		
	UNR9118/911L/911CJ					-2.0		
Collector to base voltage		V <sub>CBO</sub>	I <sub>C</sub> = -10μA, I <sub>E</sub> = 0	-50			V	
Collector to emitter voltage		V <sub>CEO</sub>	I <sub>C</sub> = -2mA, I <sub>B</sub> = 0	-50			V	
Forward current transfer ratio	UNR9111	h <sub>FE</sub>	V <sub>CE</sub> = -10V, I <sub>C</sub> = -5mA	35				
	UNR9112/911E			60				
	UNR9113/9114/UNR911AJ/911CJ			80				
	UNR9115*9116*9117*/9110*UNR911BJ			160		460		
	UNR911F/911D/9119/911H			30				
	UNR9118/911L			20				
Collector to emitter saturation voltage		V <sub>CE(sat)</sub>	I <sub>C</sub> = -10mA, I <sub>B</sub> = -0.3mA			-0.25	V	
Output voltage high level		V <sub>OH</sub>	V <sub>CC</sub> = -5V, V <sub>B</sub> = -0.5V, R <sub>L</sub> = 1kΩ	-4.9			V	
Output voltage low level		V <sub>OL</sub>	V <sub>CC</sub> = -5V, V <sub>B</sub> = -10V, R <sub>L</sub> = 1kΩ			-0.2	V	
				UNR9113/UNR911BJ				-0.2
				UNR911D				-0.2
				UNR911E				-0.2
				UNR911AJ				-0.2
								-0.2
Transition frequency		f <sub>T</sub>	V <sub>CB</sub> = -10V, I <sub>E</sub> = 2mA, f = 200MHz		150		MHz	
				UNR911AJ		80		
Input resistance	UNR9111/9114/9115	R <sub>i</sub>		(-30%)		10	(+30%)	kΩ
	UNR9112/9117					22		
	UNR9113/9110/911D/911E					47		
	UNR9116/911F/911L					4.7		
	UNR9118					0.51		
	UNR9119					1		
	UNR911H					2.2		
	UNR911AJ/911BJ					100		


\* h<sub>FE</sub> rank classification (UNR9115/9116/9117/9110)

Rank	Q	R	S
h <sub>FE</sub>	160 to 260	210 to 340	290 to 460







■ Electrical Characteristics (continued) (Ta=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit
Resis- tance ratio	UNR9111/9112/9113/911L	$R_1/R_2$		0.8	1.0	1.2	
	UNR9114			0.17	0.21	0.25	
	UNR9118/9119			0.08	0.1	0.12	
	UNR911D				4.7		
	UNR911E				2.14		
	UNR911F				0.47		
	UNR911H			0.17	0.22	0.27	
	UNR911AJ				1.0		
Resistance between Emitter to Base	UNR911CJ	$R_2$		-30%	47	30%	







Common characteristics chart

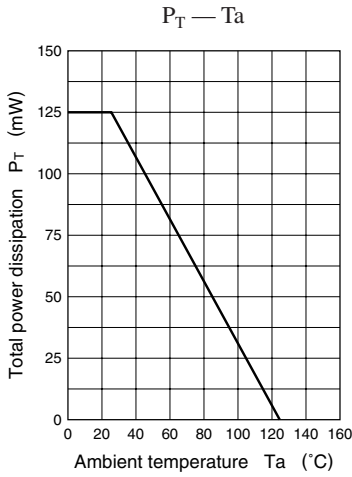




Characteristics charts of UNR9111

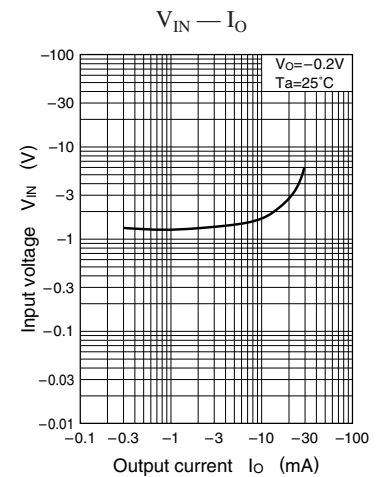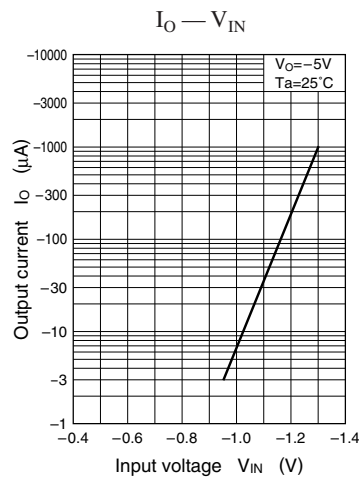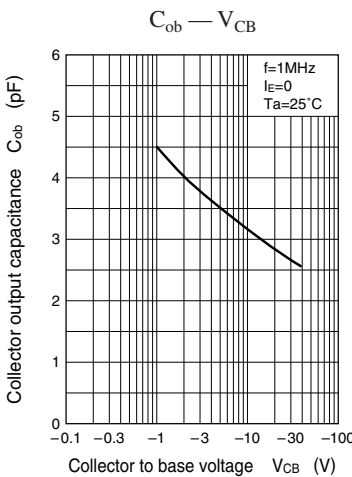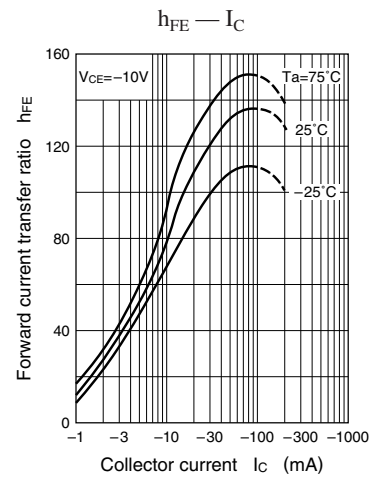
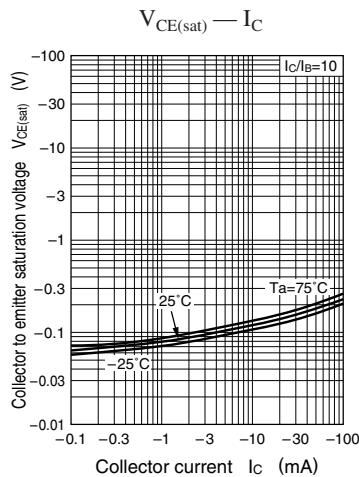
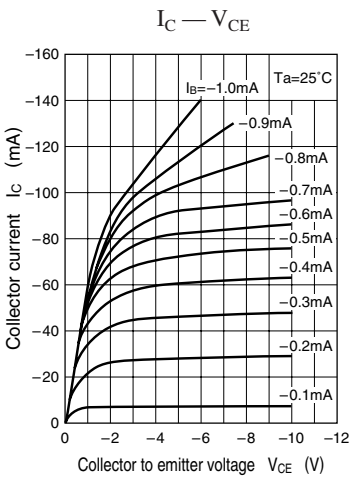


Characteristics charts of UNR9112

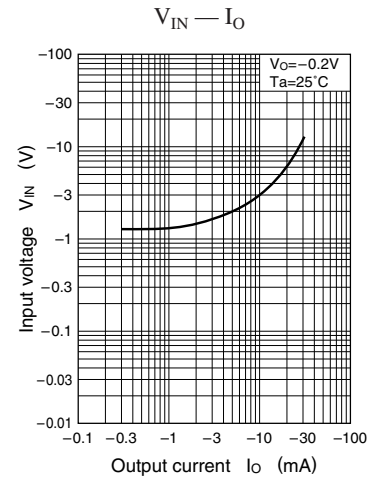
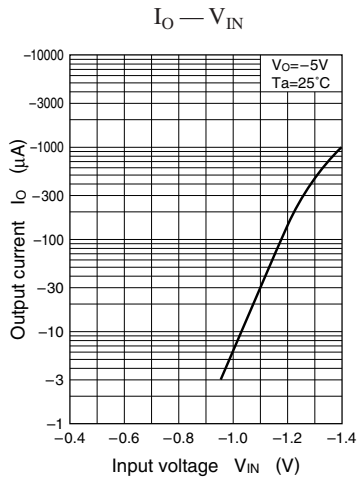
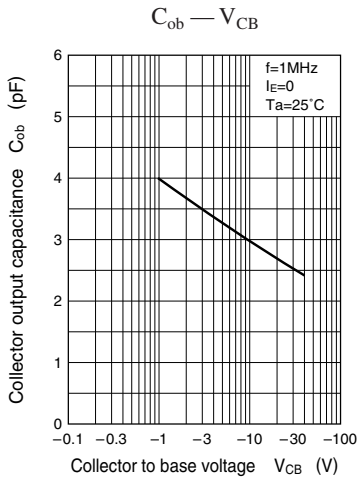
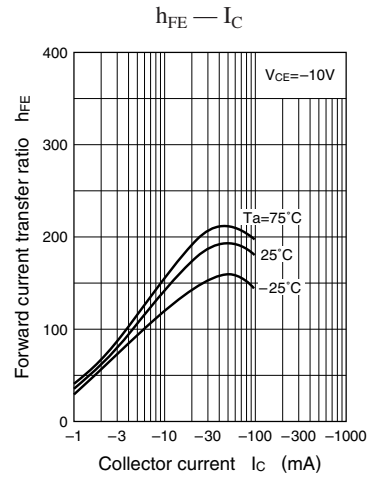
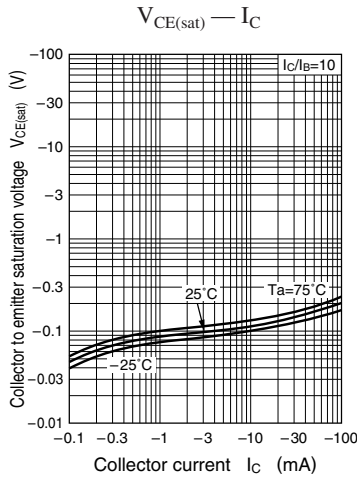
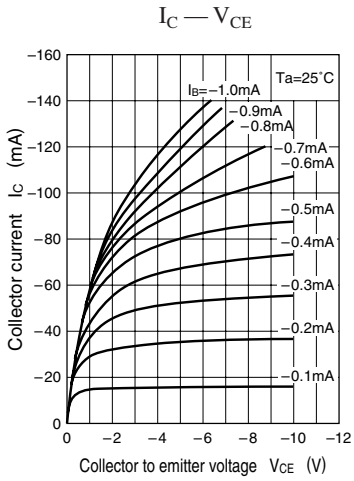


Characteristics charts of UNR9113




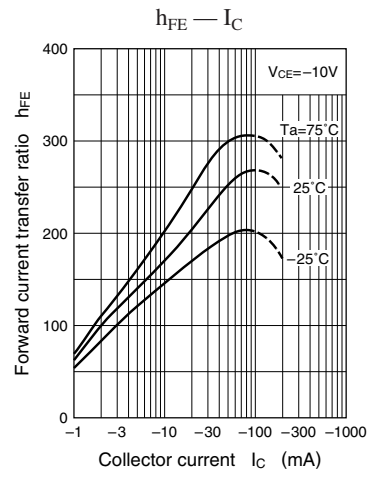
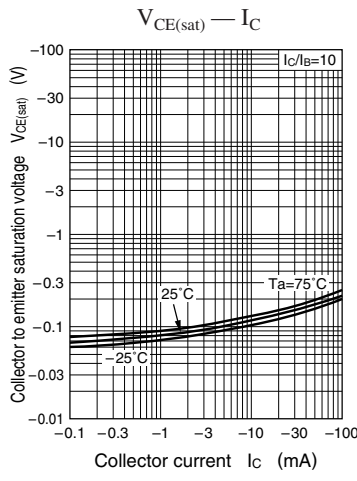
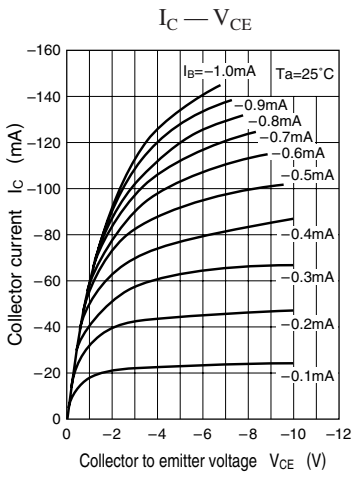


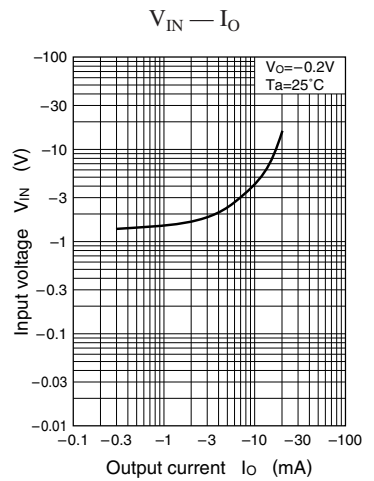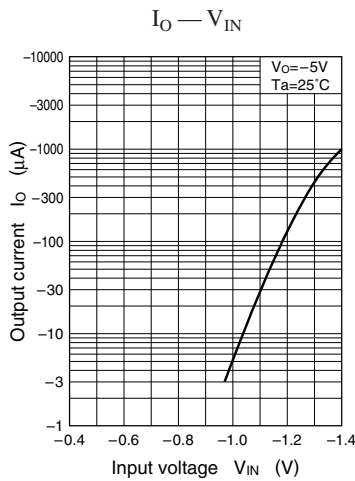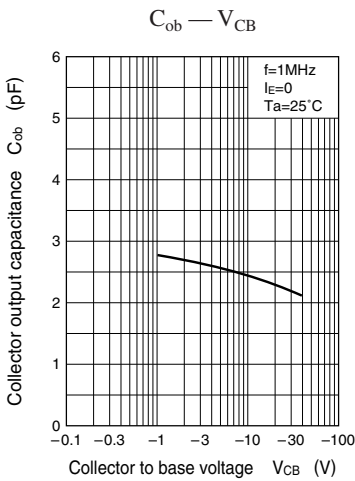




Characteristics charts of UNR9114

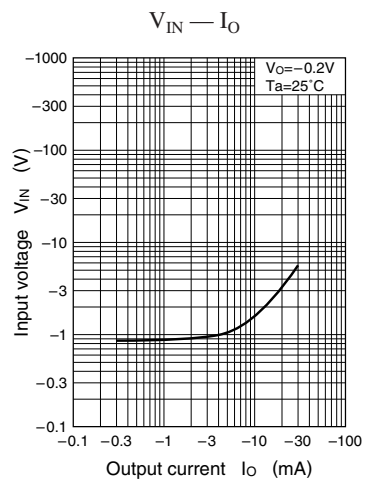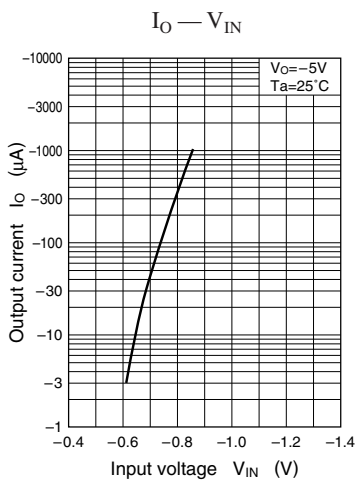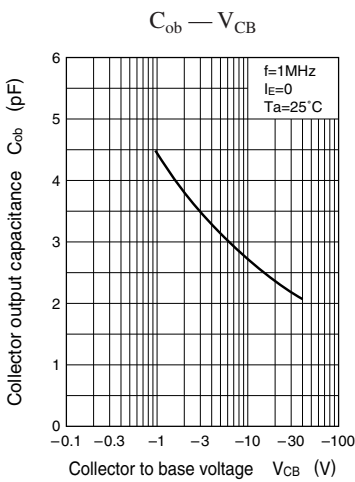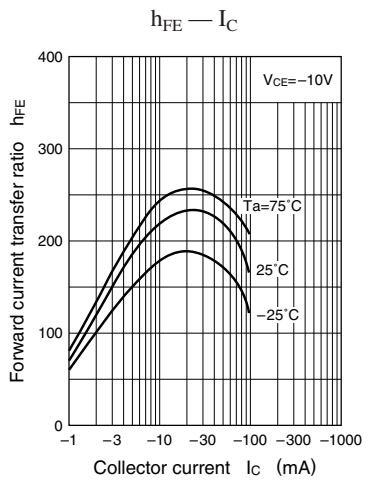
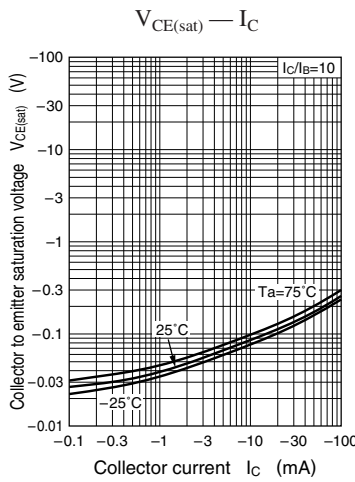
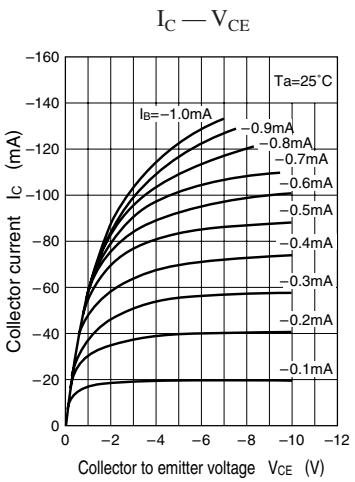


Characteristics charts of UNR9115

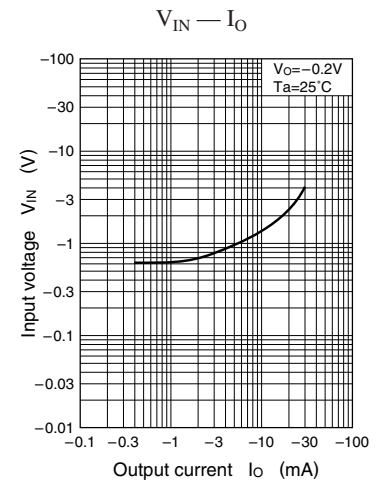
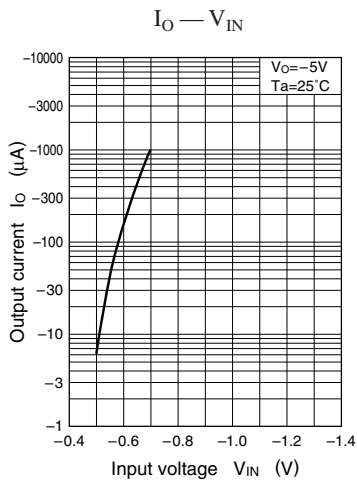
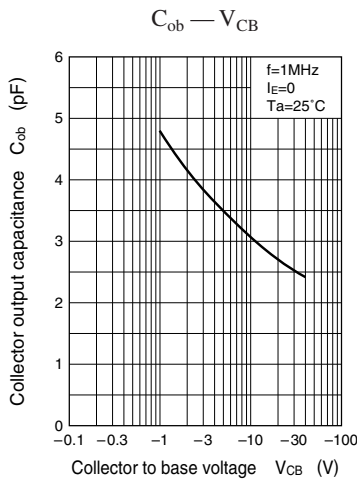
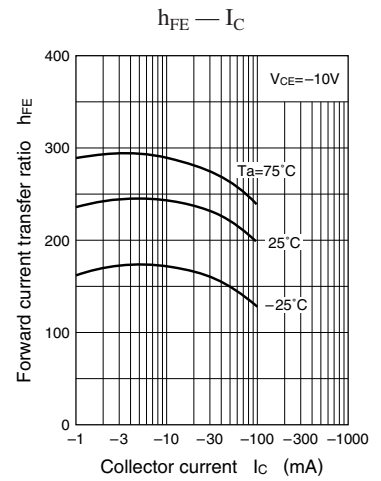
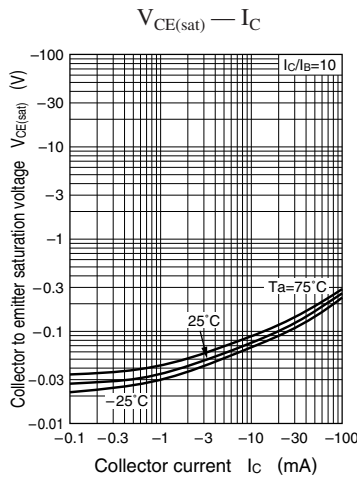
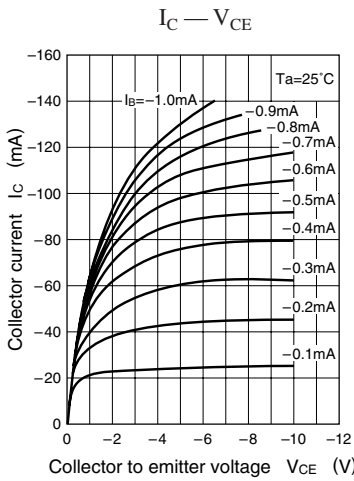


Characteristics charts of UNR9116

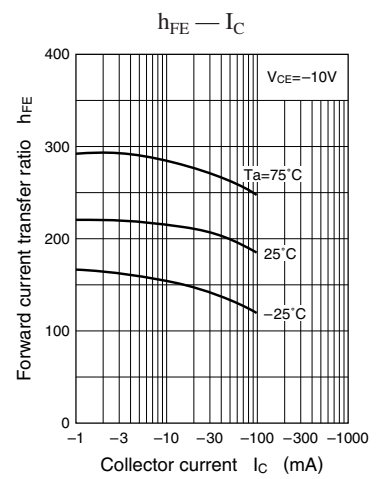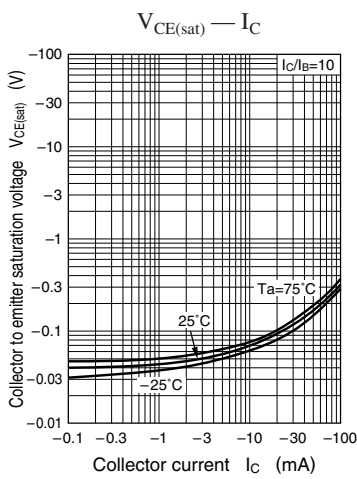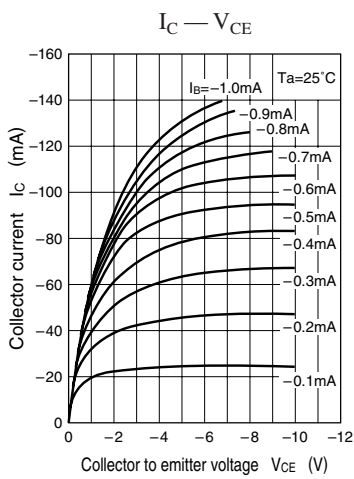

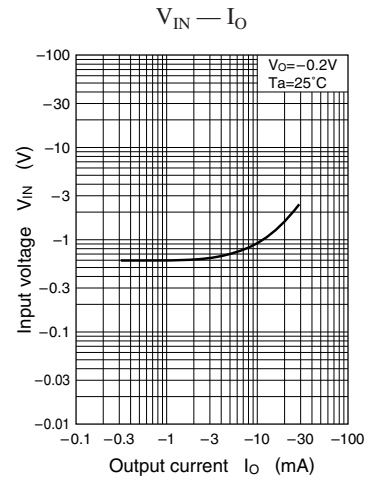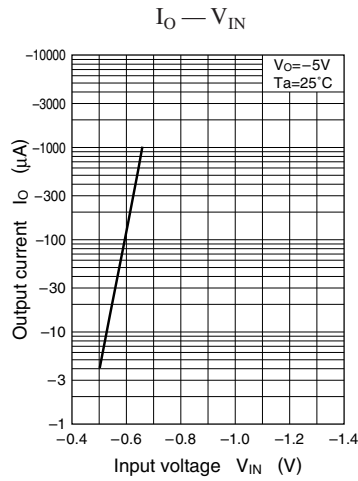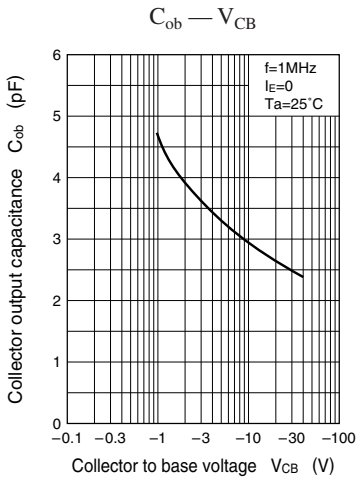


Characteristics charts of UNR9117

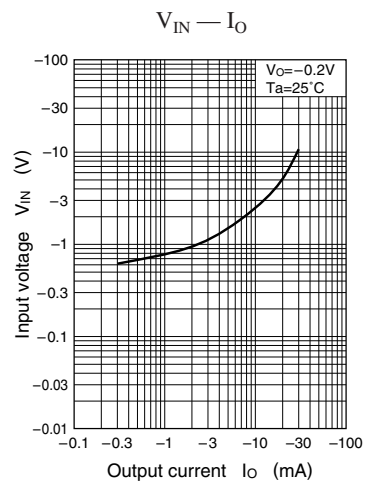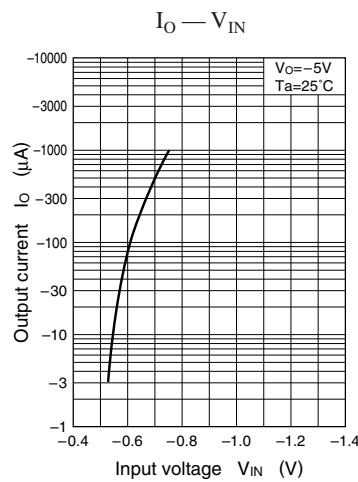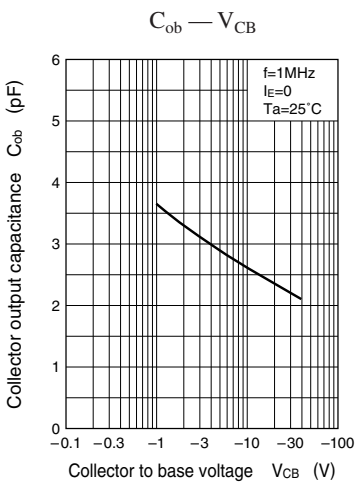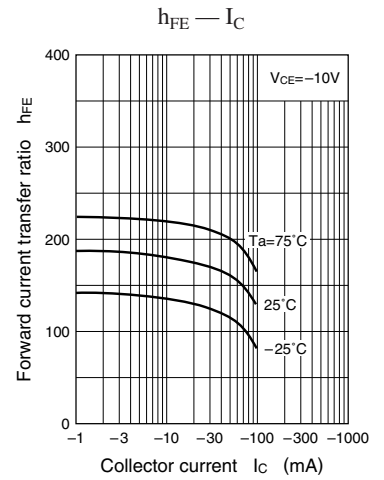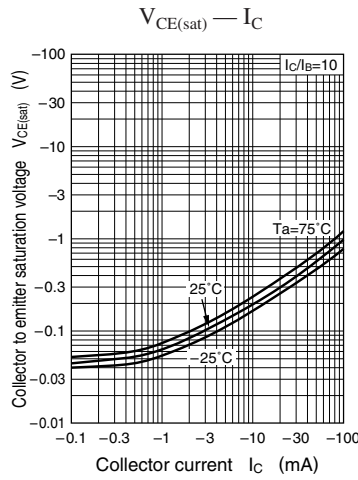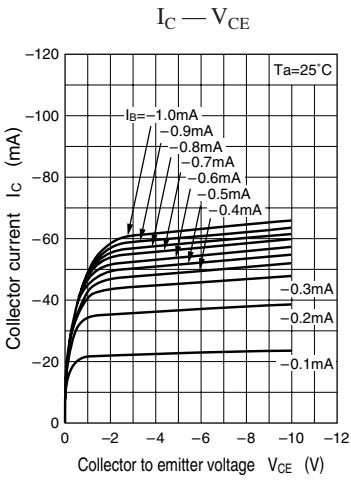







Characteristics charts of UNR9118






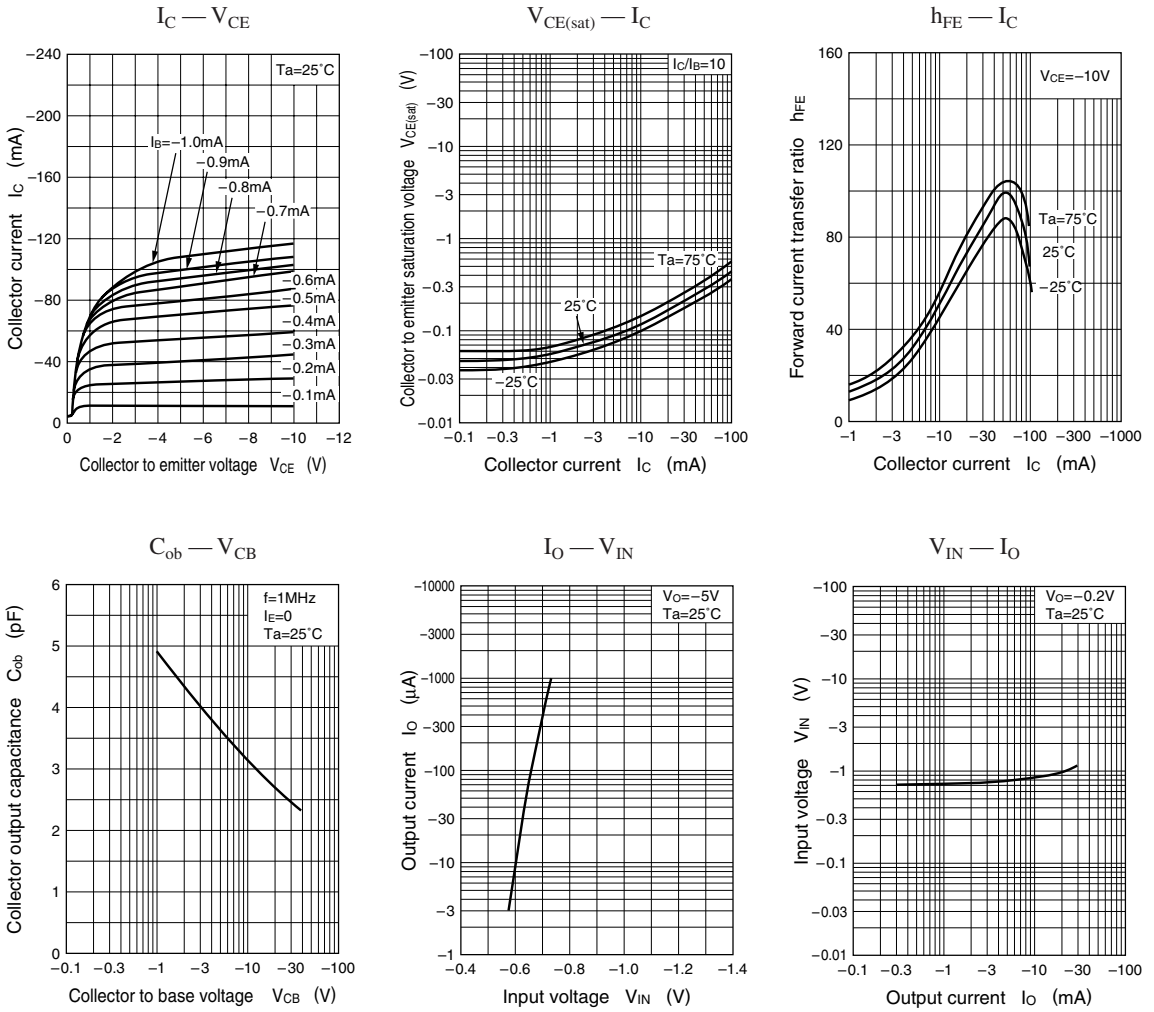


Characteristics charts of UNR9119

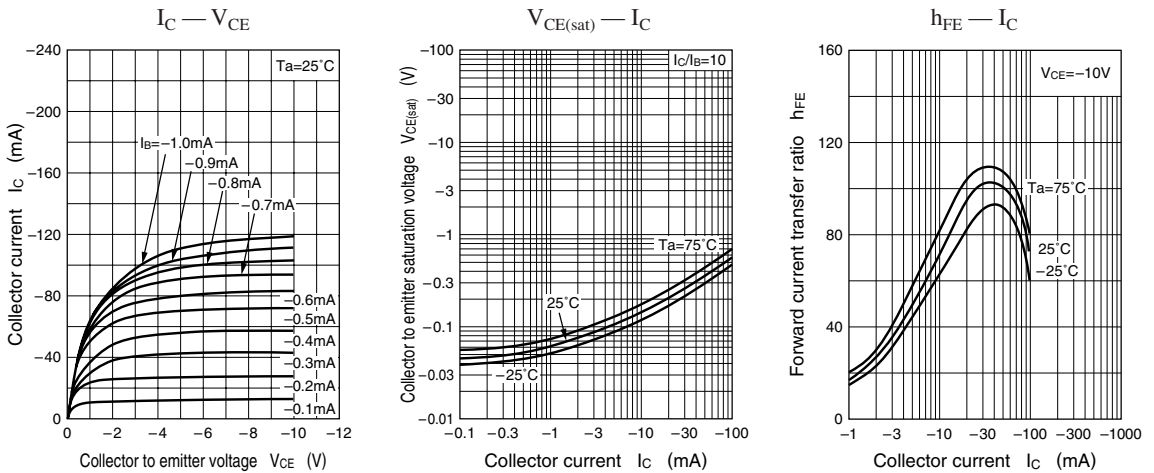


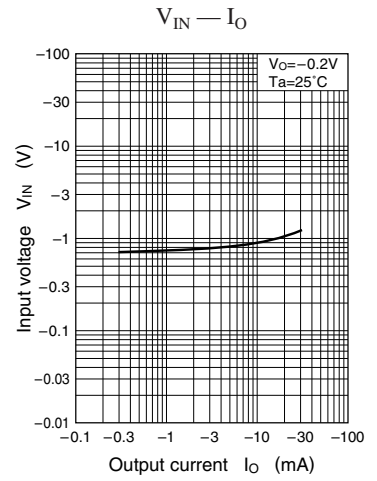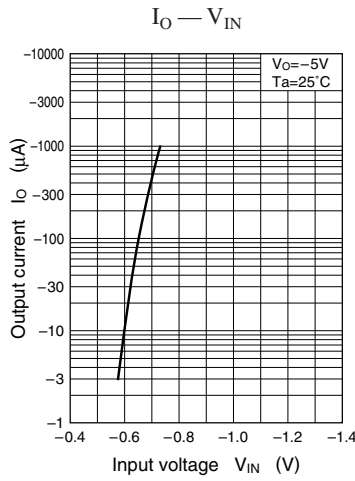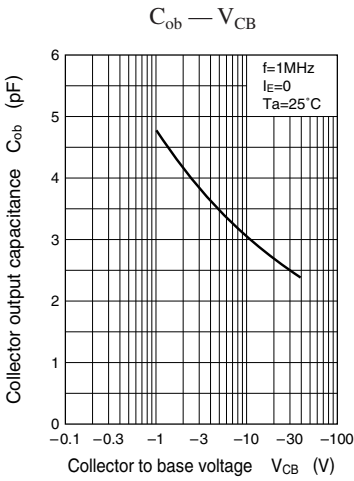


Characteristics charts of UNR9110

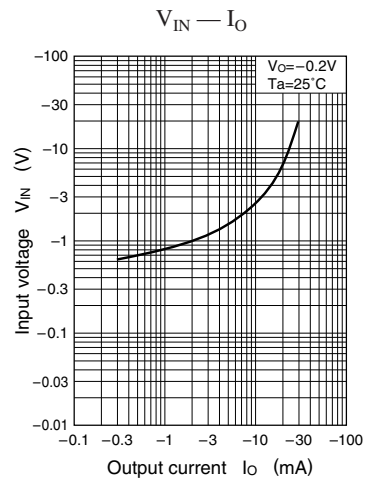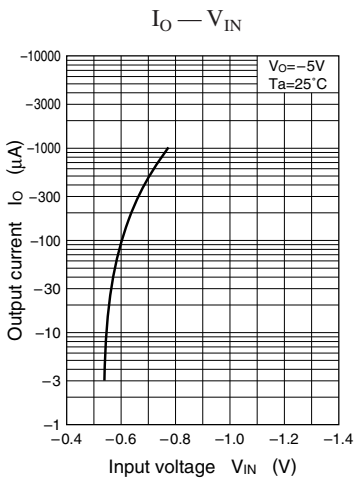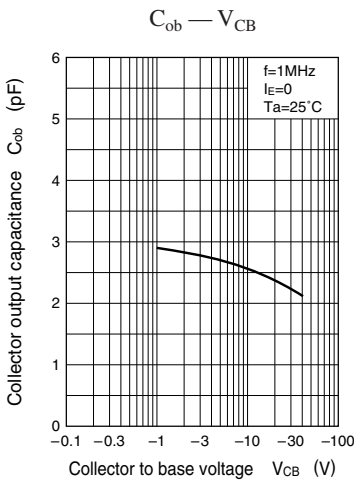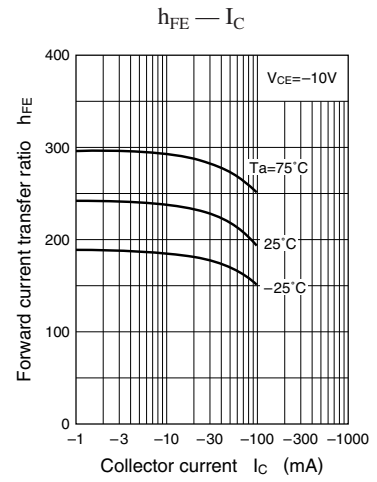
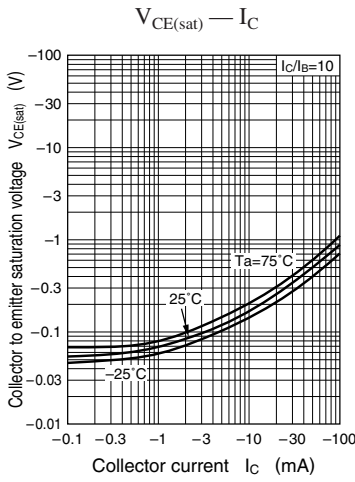
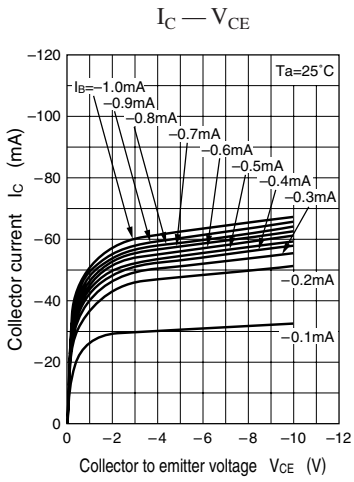


Characteristics charts of UNR911D






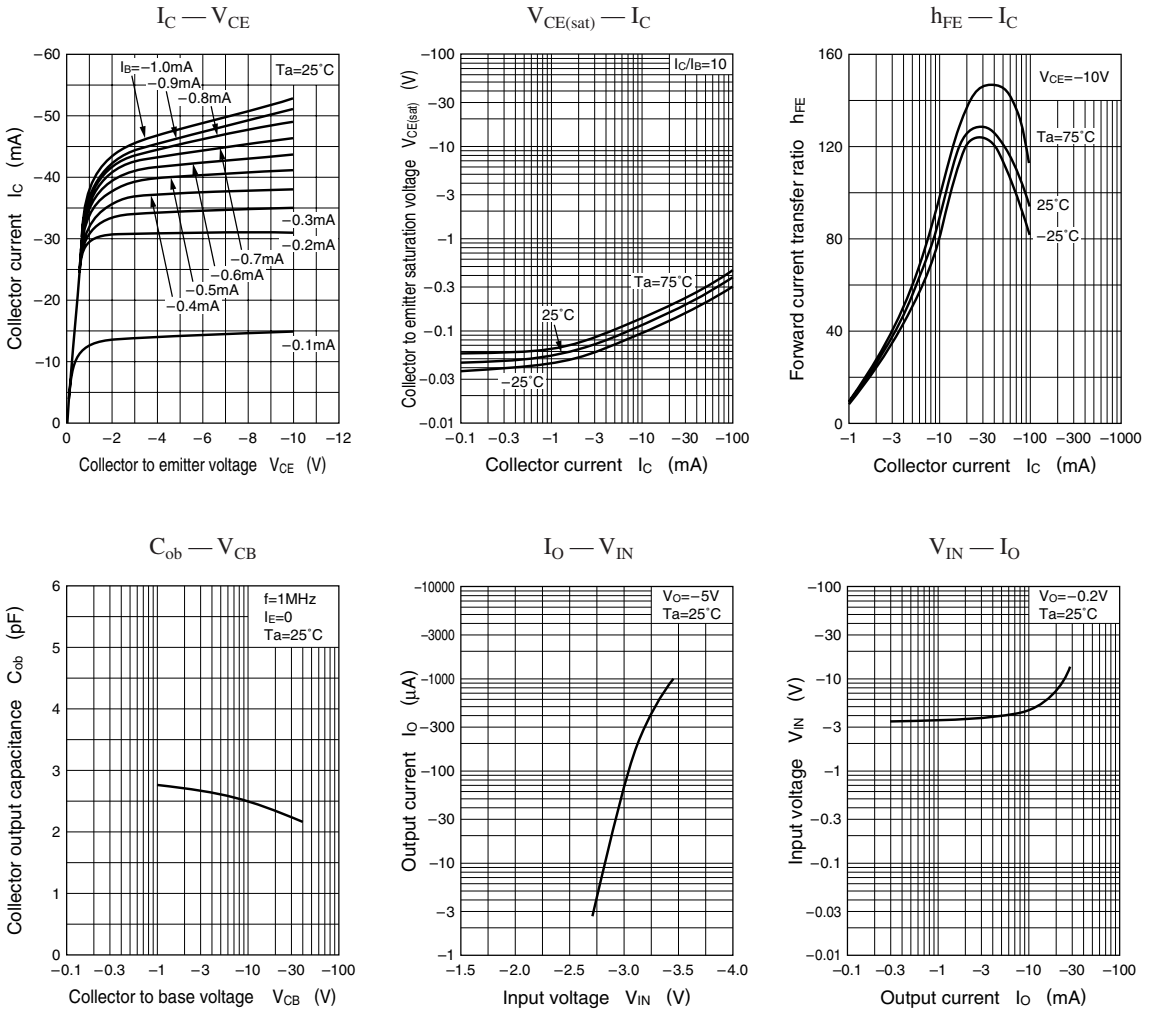


Characteristics charts of UNR911E





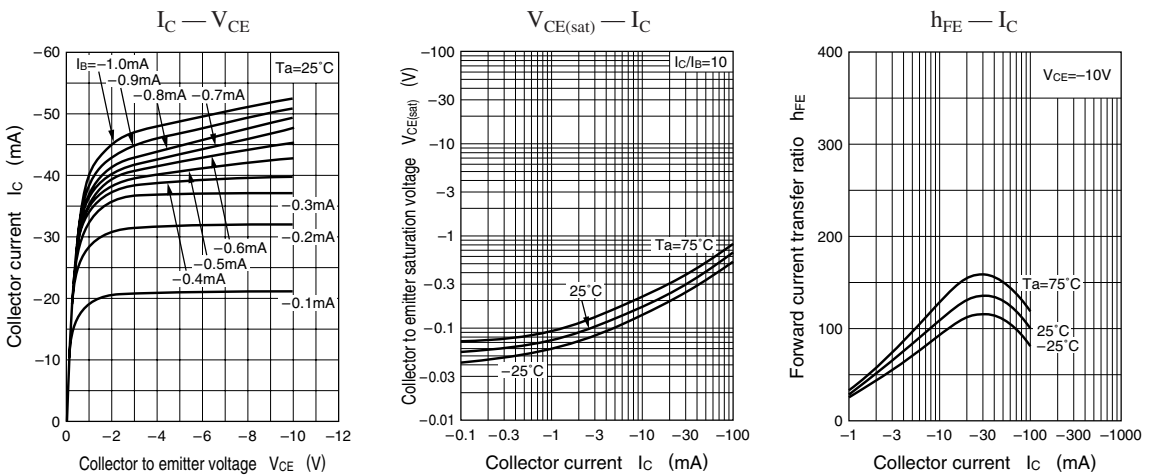


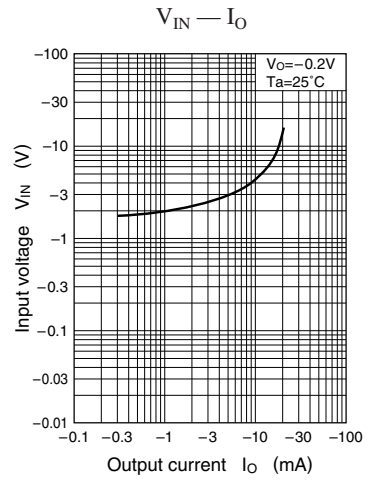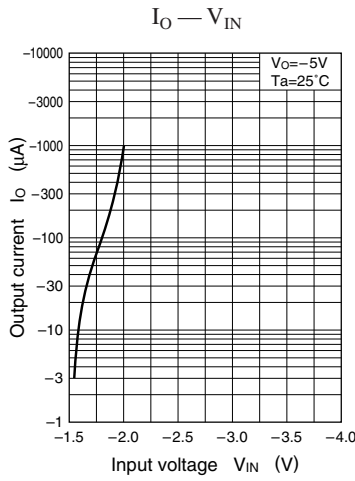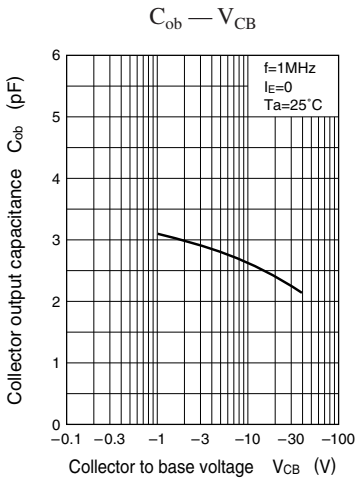




Characteristics charts of UNR911F

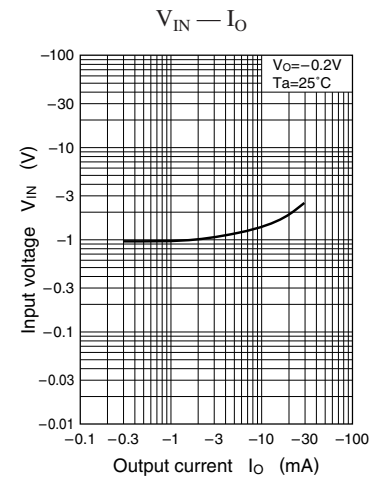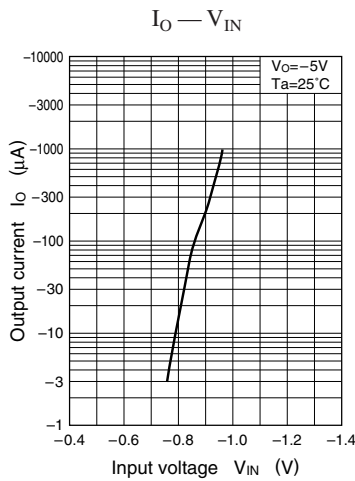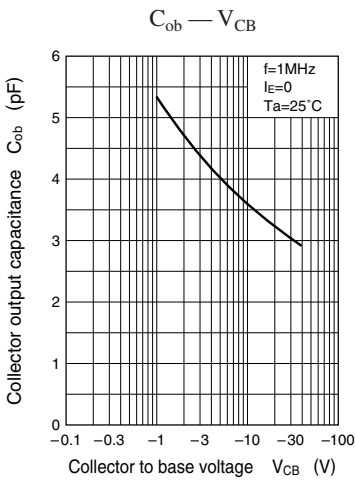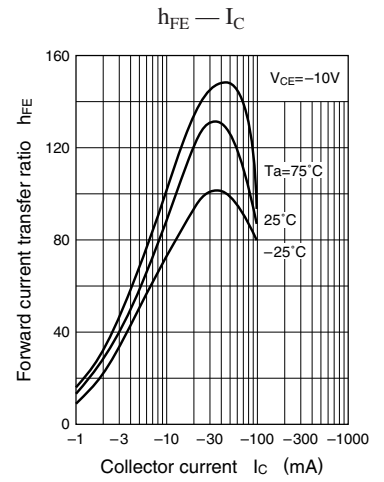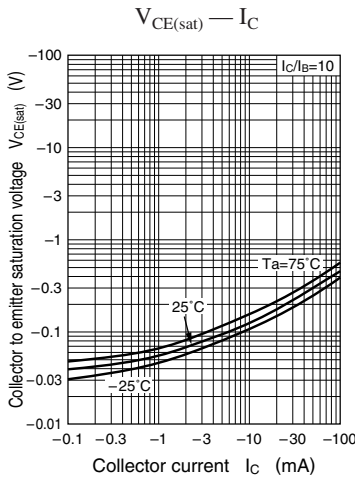
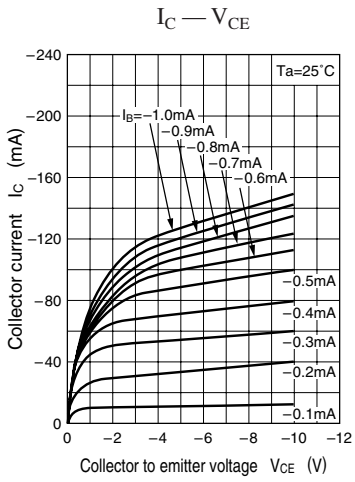


Characteristics charts of UNR911H

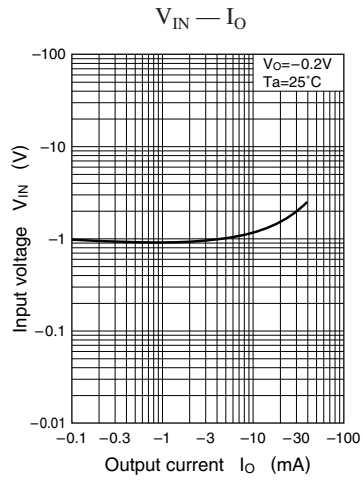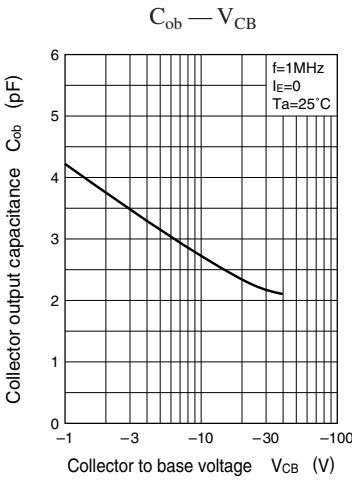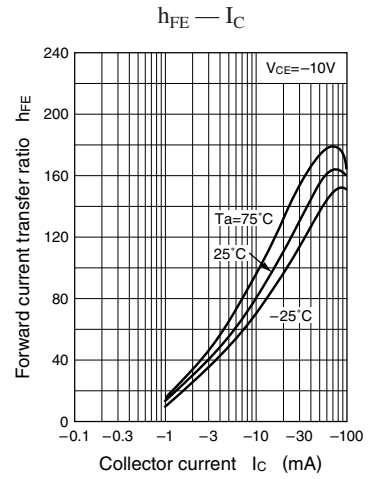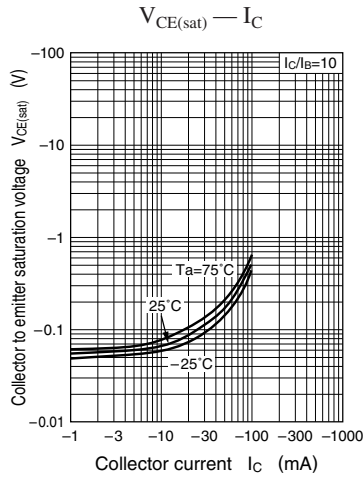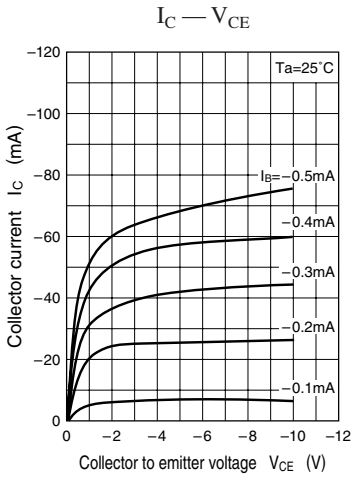

Characteristics charts of UNR911L

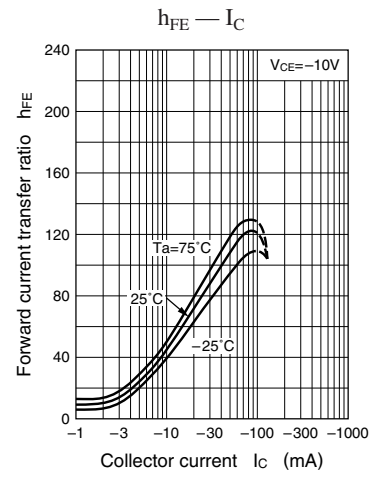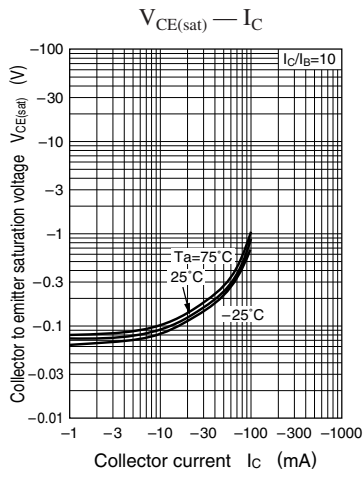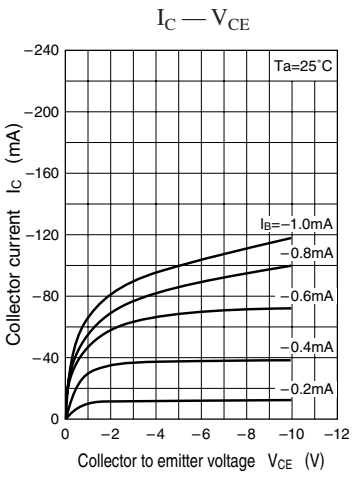

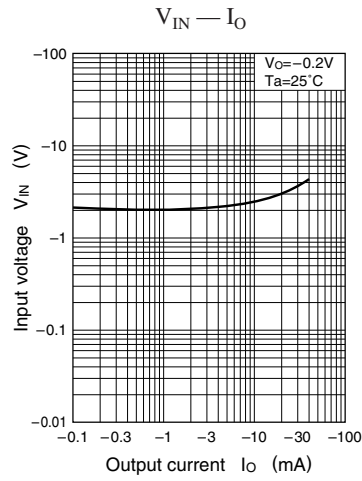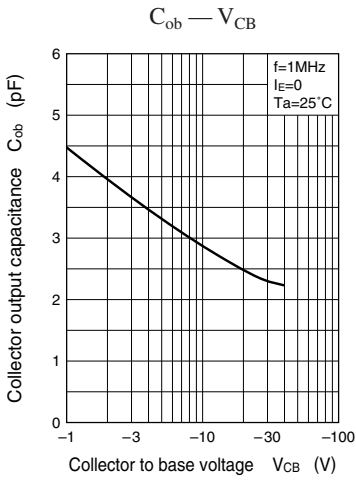

## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

## Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.  
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.  
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.  
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.