

**COMPLETE DATA SHEET
COMING SOON!**

June 1997

**CD54AC138/3A
CD54ACT138/3A**
3-to-8-Line Decoder/Demultiplexer Inverting
Description

The CD54AC138/3A and CD54ACT138/3A are 3-to-8-line decoders/demultiplexers that utilize the Harris Advanced CMOS Logic technology.

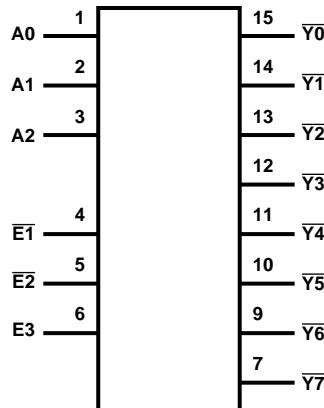
The CD54AC138/3A and CD54ACT138/3A are supplied in 16 lead dual-in-line ceramic packages (F suffix).

ACT INPUT LOAD TABLE

INPUT	UNIT LOAD (NOTE 1)
A0 - A2	0.83
\bar{E}_1, \bar{E}_2	1
E3	0.42

NOTE:

1. Unit load is ΔI_{CC} limit specified in DC Electrical Specifications Table, e.g., 2.4mA Max at +25°C.

Functional Diagram

Absolute Maximum Ratings

DC Supply Voltage, V_{CC}	-0.5V to +6V
DC Input Diode Current, I_{IK} For $V_I < -0.5V$ or $V_I > V_{CC} + 0.5V$	$\pm 20\text{mA}$
DC Output Diode Current, I_{OK} For $V_O < -0.5V$ or $V_O > V_{CC} + 0.5V$	$\pm 50\text{mA}$
DC Output Source or Sink Current, Per Output Pin, I_O For $V_O > -0.5V$ or $V_O < V_{CC} + 0.5V$	$\pm 50\text{mA}$
DC V_{CC} or GND Current, I_{CC} or I_{GND} For Up to 4 Outputs Per Device, Add $\pm 25\text{mA}$ For Each Additional Output	$\pm 100\text{mA}$

Power Dissipation Per Package, P_D $T_A = -55^\circ\text{C}$ to $+100^\circ\text{C}$ (Package F)	500mW
$T_A = +100^\circ\text{C}$ to $+125^\circ\text{C}$ (Package F)	Derate Linearly at $8\text{mW}/^\circ\text{C}$ to 300mW
Operating Temperature Range, T_A Package Type F	-55°C to $+125^\circ\text{C}$
Storage Temperature, T_{STG}	-65°C to $+150^\circ\text{C}$
Lead Temperature (During Soldering) At Distance 1/16in. $\pm 1/32\text{in}$. ($1.59\text{mm} \pm 0.79\text{mm}$) From Case For 10s Max	$+265^\circ\text{C}$
Unit Inserted Into a PC Board (Min Thickness 1/16in., 1.59mm) With Solder Contacting Lead Tips Only	$+300^\circ\text{C}$

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Recommended Operating Conditions

Supply Voltage Range, V_{CC} Unless Otherwise Specified, All Voltages Referenced to GND	-
T_A = Full Package Temperature Range	
CD54AC Types	1.5V to 5.5V
CD54ACT Types	4.5V to 5.5V
DC Input or Output Voltage, V_I, V_O	0V to V_{CC}

Operating Temperature, T_A	-55°C to $+125^\circ\text{C}$
Input Rise and Fall Slew Rate, dt/dv at 1.5V to 3V (AC Types)	0ns/V to 50ns/V
at 3.6V to 5.5V (AC Types)	0ns/V to 20ns/V
at 4.5V to 5.5V (AC Types)	0ns/V to 10ns/V