

# Monolithic crystal filter

## MQF24.3-3600/04



### Application

- 8 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

### Limiting values

		Unit	Value
Center frequency	$f_0$	MHz	24.3
Insertion loss		dB	$\leq 2.0$
Pass band at 6.0 dB		kHz	$\pm 18.00$
Ripple in pass band	$f_0 \pm 14.50$ kHz	dB	$\leq 2.0$
Stop band attenuation	$f_0 \pm 50$ kHz	dB	$\geq 80$
Alternate attenuation	$f_0 \pm 50 \dots 500$ kHz	dB	$> 80$
Spurious responses	$f_0 \pm 50 \dots 500$ kHz	dB	$> 60$


### Terminating impedance Z

R1    C1	Ohm/pF	2200    0
R2    C2	Ohm/pF	2200    0


Operating temp. range	$^{\circ}\text{C}$	-40... +70
-----------------------	--------------------	------------

### Characteristics MQF24.3-3600/04

#### Pass band

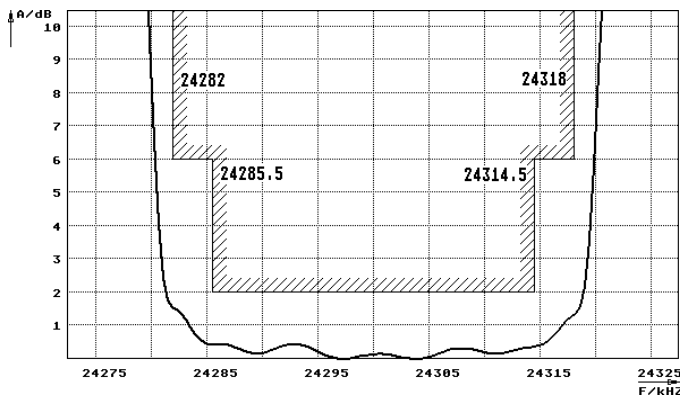

#### Stop band

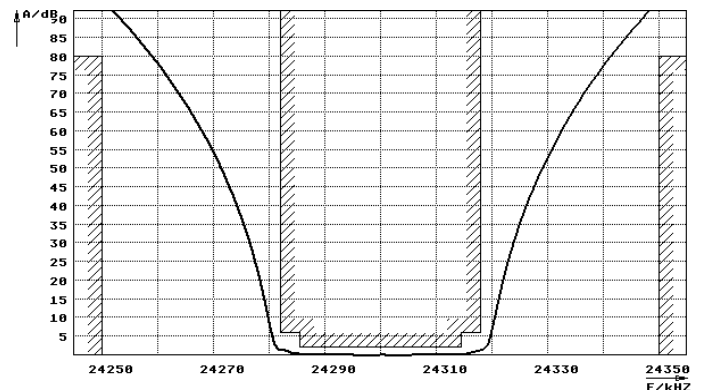

Pin connections: 1 Input  
2 Input-E  
3 Output  
4 Output-E

