

The SD - 402 is position sensors for automatic focusing of camera. It has 22 millimeter area.

### FEATURES


- Laser beam focusing/positioning is best performed
- High performance

### APPLICATIONS

- Optical disk

### DIMENSIONS

(Unit : mm)

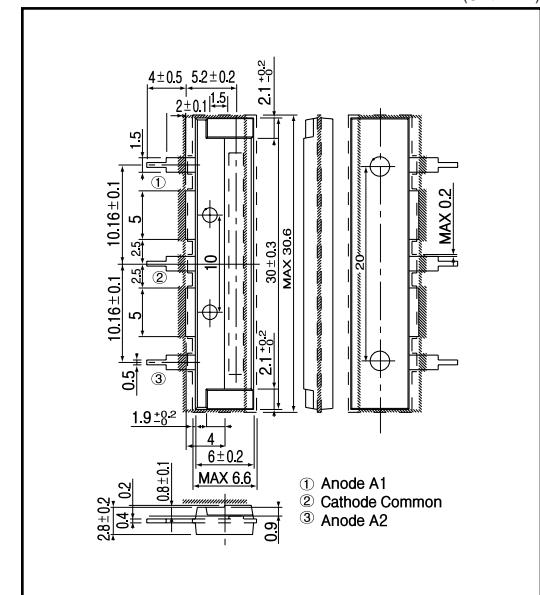

### MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Reverse voltage	V <sub>R</sub>	15	V
Power dissipation	P <sub>D</sub>	30	mW
Operating temp.	T <sub>opr.</sub>	-20 ~ +85	
Storage temp.	T <sub>stg.</sub>	-25 ~ +90	

### ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Reverse voltage	V <sub>R</sub>	I <sub>R</sub> =10μA	15			V
Dark current	I <sub>D</sub>	V <sub>R</sub> =1V			10	nA
Light current	I <sub>L</sub> <sup>-1</sup>	V <sub>R</sub> =1V, E=1000lx <sup>5</sup>	100	120		μA
Spectral sensitivity				700~1,100		nm
Peak wavelength	λ			940		nm
Capacitance	C <sub>t</sub>	V <sub>R</sub> =1V, f=1MHz		30		pF
Resistance	R <sub>s</sub> <sup>-2</sup>	V <sub>R</sub> =1V, V <sub>A</sub> =0.5V	140	200	260	K
Signal slope	<sup>-3</sup>	V <sub>R</sub> =1V		0.036		-
Light current difference	I <sub>L</sub> /I <sub>L</sub> <sup>-4</sup>				± 2	%

\*1. I<sub>L</sub>=I<sub>1</sub>+I<sub>2</sub> (I<sub>L</sub>=Light current of A1,I<sub>1</sub>=Light current of A2)\*2. V<sub>A</sub>=Voltage of Anode A1,A2\*3. =1(I<sub>L</sub>-I<sub>L</sub><sup>-1</sup>)/(I<sub>L</sub>+I<sub>L</sub><sup>-1</sup>)\*4. L=L<sub>1</sub>+L<sub>2</sub>

\*5. Color temp.=2856K standard Tungsten lamp

## Position Sensitive Diode

SD - 402

