

Technical Specification for 2.5Gbps Fiber Optic Transmitter Module

SDT8028-T_-Q_-

- | | | |
|---|---------------------------------------|---|
| <input type="checkbox"/> 155.52Mb/s | <input type="checkbox"/> 622.08Mb/s | <input checked="" type="checkbox"/> other <u>2488.32Mbps</u> |
| <input type="checkbox"/> Short Haul | <input type="checkbox"/> Long Haul | <input checked="" type="checkbox"/> Intra Office |
| <input type="checkbox"/> Intermediate Reach | <input type="checkbox"/> Long Reach | <input checked="" type="checkbox"/> Short Reach |
| <input checked="" type="checkbox"/> Single 5.0 V | <input type="checkbox"/> Single 3.3 V | <input type="checkbox"/> other _____ |
| <input checked="" type="checkbox"/> 1.3 μm | <input type="checkbox"/> 1.55 μm | <input type="checkbox"/> other _____ |
| <input checked="" type="checkbox"/> Transmitter | <input type="checkbox"/> Receiver | <input type="checkbox"/> Transceiver |
| (<input type="checkbox"/> 2R / <input type="checkbox"/> 3R) | | (<input type="checkbox"/> 2R / <input type="checkbox"/> 3R) |

 SUMITOMO ELECTRIC

Sumitomo Electric reserves the right to make changes in the specification without prior notice.

#Safety Precaution Symbols This specification uses various picture symbols to prevent possible injury to operator or other persons or damage to properties for appropriate use of the product. The symbols and definitions are as shown below. Be sure to be familiar with these symbols before reading this specification.

⚠ Warning

Wrong operation without following this instruction may lead to human death or serious injury.

⚠ Caution

Wrong operation without following this instruction may lead to human injury or property damage.

Example of picture symbols



indicates prohibition of actions. Action details are explained thereafter.



indicates compulsory actions or instructions. Action details are explained thereafter.

1. General

The features of SDT8028-T_Q_ are listed below:

- * SDH STM-16 I-16 / SONET OC-48 SR-1 Compliant
- * Power Supply Voltage Single +5V (or -5V)
- * Low Power Supply Current 150mA (typ.)
- * Compact Package Size 36 X 15 X 9 mm
- * Pin Configuration 24 pin Dual in Line
- * Uncooled Laser Diode with Automatic Optical Power Control Circuit
- * Laser Diode 1300nm InGaAsP / InP, FP-LD
- * Optical Output Shut-down Function (Disable Function)
- * Laser Bias Current Alarm Function.
- * Laser Bias Monitor / Rear Facet Monitor Function.
- * Clocked / Non-clocked mode selector
- * Optical Connector Interface FC / SC / MU connector

2. Block Diagram

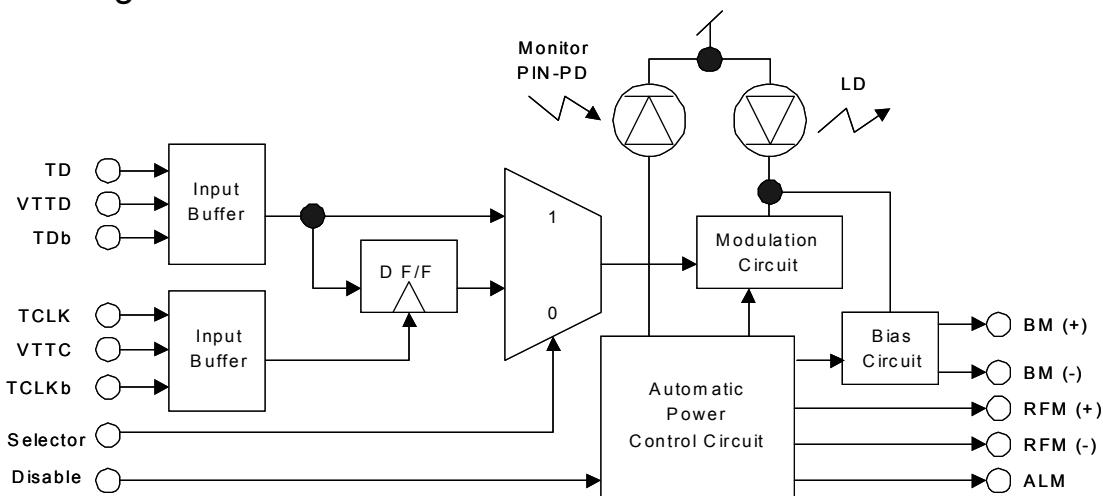


Figure 1. Block Diagram

*Clocked Operation Mode
(Vs=VsIct)

Data Input				Optical Output
TD	TDb	TCLK	TCLKb	
H	L	↗	↘	H
L	H	↗	↘	L
φ	φ	L	H	Q0

H:High Level, L:Low Level, φ:H or L
Q0:Previous optical output status
before data input condition defined

*Non-Clocked Operation Mode
(Vs=VnsIct)

Data Input		Optical Output
TD	TDb	
H	L	H
L	H	L

H:High Level, L:Low Level

3. Package Dimension

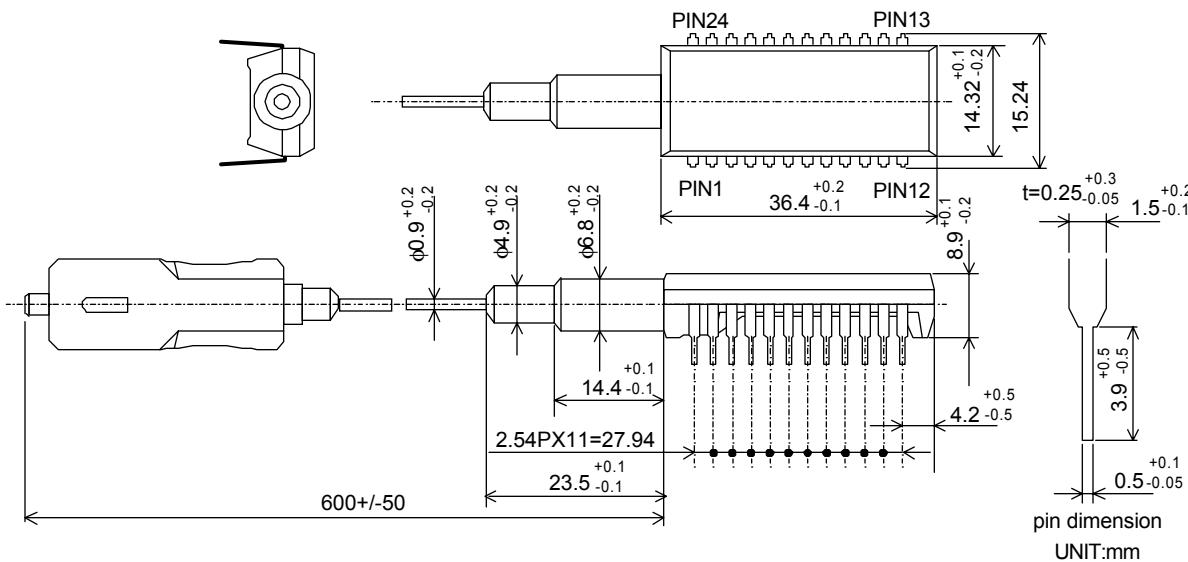


Figure 2. Package Dimension

⚠ Caution



Do not disassemble this product. Otherwise, failure, electrical shock, overheating or fire may occur.

Handle the lead pins carefully. Use assisting tools or prospective aids as required. A lead pin may injure skin or human body

4. Pin Assignment

Pin	Symbol	I/O	Level	Description
1	Vcc		+5V	Positive power supply (+5V)
2	Vcc		+5V	
3	RFM(+)	O	Analog	Rear facet PD current monitor voltage (positive)
4	RFM(-)	O	Analog	Rear facet PD current monitor voltage (negative)
5	TDb	I	PECL	Differential data input (negative)
6	VTTD		Vcc-2V (AC GND)	Data input signal termination, Vcc-2V supply for DC PECL interface. Or pull down to GND via a capacitor for AC coupled interface.
7	TD	I	PECL	Differential data input (positive)
8	NC			No user connection
9	Vcc		+5V	Positive power supply (+5V)
10	Vcc		+5V	Positive power supply (+5V)
11	Vee		GND	Negative power supply (GND)
12	Vee		GND	Negative power supply (GND)
13	Vee		GND	Negative power supply (GND)
14	Vee		GND	Negative power supply (GND)
15	ALM	O	TTL	LD bias current alarm, normal low, active high
16	Disable	I	TTL	Transmitter disable input. Default (open) LOW and transmitter is enabled.
17	Selector	I		Signal input mode selector, clocked or non-clocked. Default (open) LOW and clocked mode.
18	TCLK	I	PECL	Differential clock input (positive)
19	VTTC		Vcc-2V (AC GND)	Clock input signal termination, Vcc-2V supply for DC PECL interface. Or pull down to GND via a capacitor for AC coupled interface
20	TCLKb	I	PECL	Differential clock input (negative)
21	BM(-)	O	Analog	LD bias current monitor voltage (negative)
22	BM(+)	O	Analog	LD bias current monitor voltage (positive)
23	Vcc		+5V	Positive power supply (+5V)
24	Vcc		+5V	Positive power supply (+5V)

NC pins should left open for additional functions in the future

5. Absolute Maximum Ratings

Parameter	Symbol	min.	Max	Unit	Note
Storage Case Temperature	T _s	-40	85	°C	1
Operating Case Temperature	T _c	0	70	°C	1
Supply Voltage	V _{cc} -V _{ee}	0.0	6.0	V	2
Input Voltage	V _i	V _{ee}	V _{cc}	V	3
Lead Soldering (Temperature) (Time)			260 10	°C sec.	4

Note 1. No condensation allowed. 2. V_{cc}>V_{ee}, V_{cc}=+5.0V for V_{ee}=GND or V_{cc}=GND for V_{ee}=-5.0V

3. Data, Clock, Disable and Selector 4. Measured on lead pins 2mm (0.079in.) off the package bottom

⚠ Warning

⚠ Use the product with the rated voltage described in the specification. If the voltage exceeds the maximum rating, overheating or fire may occur.

⚠ Caution

🚫 Do not store the product in the area where temperature exceeds the maximum rating, where there is too much moisture or dampness, where there is acid gas or corrosive gas, or other extreme conditions. Otherwise, failure, overheating or fire may occur.


6. Electrical Interface

(Unless otherwise specified, V_{cc}-V_{ee} = 4.75 to 5.25 V @2488.32Mbps, PRBS2²³-1, 50% duty and all operating temperature shall apply.)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V _{cc} -V _{ee}	4.75	5.00	5.25	V	
Supply Current	I _d		150	200	mA	1
Input Impedance (Data and Clock)	R _{in}		50		Ω	2
Input Voltage	V _{ih}	V _{cc} -1.00	V _{cc} -0.90	V _{cc} -0.70	V	
(Data and Clock, for ECL or PECL interface)	V _{il}	V _{cc} -1.90	V _{cc} -1.70	V _{cc} -1.60	V	
Differential Input Voltage Swing for AC coupled interface	V _{in}	0.45	0.80	1.20	V _{p-p}	
Input Signal Rise Time (20% - 80%)	T _r		100	120	ps	
Input Signal Fall Time (20% - 80%)	T _f		100	120	ps	
Setup Time (for clocked mode)	T _{set}	130			ps	3
Hold Time (for clocked mode)	T _{hold}	75			ps	3
Disable Input Voltage	V _{disbl}	V _{ee} +2.00		V _{cc}	V	4
	V _{enbl}	V _{ee}		V _{ee} +0.8	V	
Selector Input Voltage	V _{slct}	V _{ee}		V _{ee} +1.5	V	5
	V _{ncslt}	V _{cc} -1.5		V _{cc}	V	
LD Bias Alarm Output Voltage	V _{almI}	V _{ee}		V _{ee} +0.5	V	6
	V _{almh}	V _{cc} -1.00		V _{cc}	V	
LD Bias Monitor Voltage (between pin 22 and pin 21)	V _{bm}	0.01	0.10	0.50	V	7, 9
Rear Facet PD monitor Voltage (between pin 3 and pin 4)	V _{rfm}	0.01	0.10	0.25	V	8, 9

1. Termination current is not included. 2. Measured between each signal input and VTDD or VTTC. Refer to Figure 3.

3. Refer to Figure 4. 4. Default (Open) normal operation. 5. Default (Open) clocked mode. 6. Alarm will be launched when LD bias current exceeds 70mA typ. 7. LD bias current can be monitored by measuring the voltage difference between BM(+) Pin 22 and BM(-) Pin 21. Please refer to Figure 5. 8. Rear Facet PD current can be monitored by measuring the voltage difference between RFM(+) Pin 3 and RFM(-) Pin 4. Please refer to Figure 5. 9. High input impedance (> 1MΩ) device is required to measure this voltage.

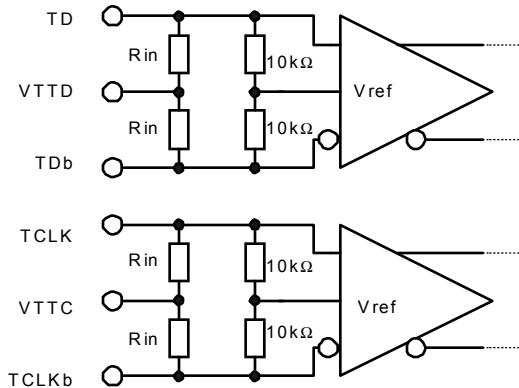

$$V_{ref} = V_{cc} - 1.4V \text{ typ.}$$

Figure 3. Data and Clock Input Interface
(SDT8028-T-Q_)

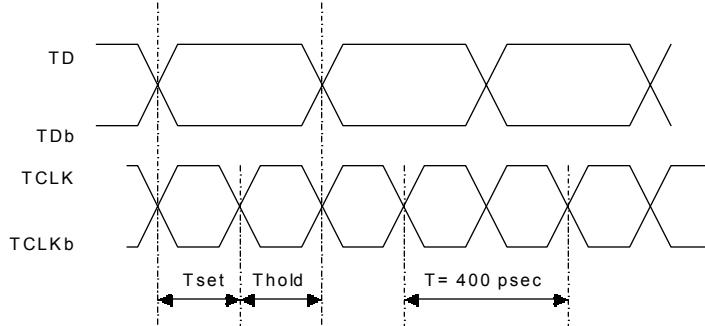


Figure 4. Input Data and Clock Timing

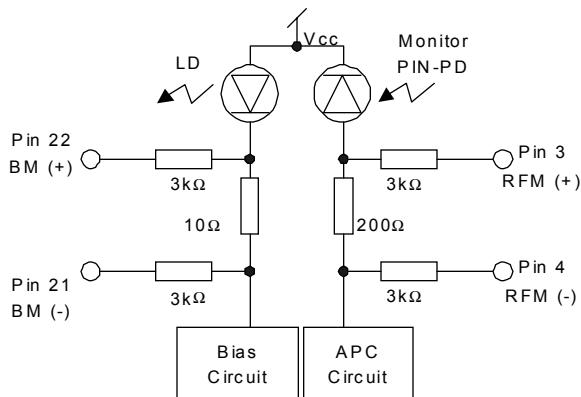


Figure 5. BM and RFM Interface

7. Optical Interface

(Unless otherwise specified, Vcc-Vee = 4.75 to 5.25 V @2488.32Mbps, PRBS2²³-1, 50% duty and all operating temperature shall apply.)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Optical Output Power	Po	-10.0		-3.0	dBm	
Optical Output Power (disable)	Podis			-45.0	dBm	
Extinction Ratio	Er	8.2			dB	
Center Wavelength	λ_c	1266		1360	nm	
Spectral Width (RMS)	$\Delta\lambda$			4.0	nm	
Output Eye Diagram		Compliant with Bellcore G-253 CORE and ITU G957				1

Note1. Refer to Figure 6 for the eye diagram mask

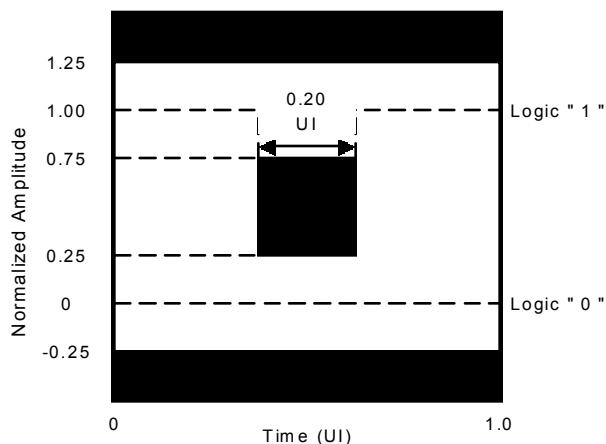


Figure 6. Eye Diagram Mask for Optical Output

⚠ Warning



Do not look at the laser beam projection area (e.g. end of optical connector) with naked eyes or through optical equipment while the power is supplied to this product. Otherwise, your eyes may be injured.

8. Recommended User Interface

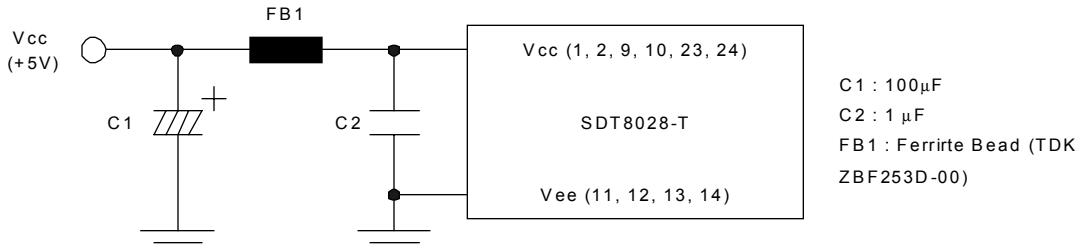


Figure 7. Recommended Power Supply Filtering

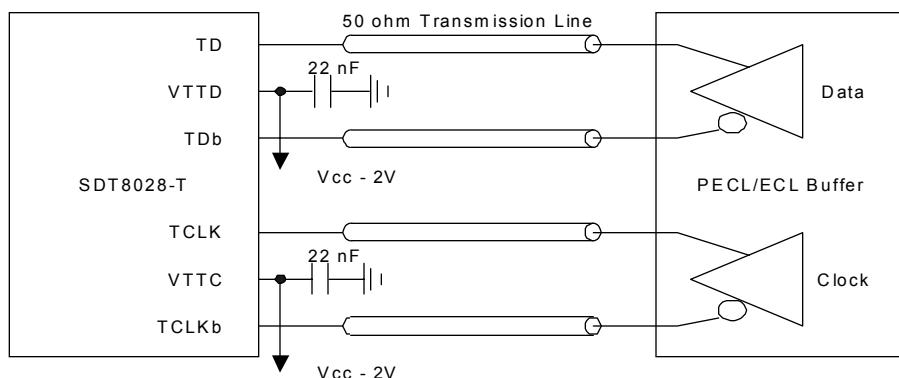


Figure 8. Data and Clock Interface with PECL/ECL Device (DC coupled Interface)

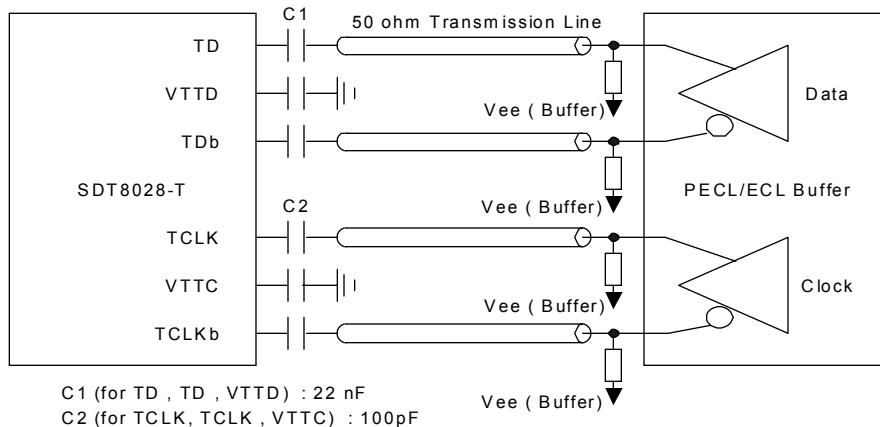


Figure 9. Data and Clock Interface with PECL/ECL Device (AC coupled Interface)


9. Fiber Pigtail Specification

Parameter	Min.	Typ.	Max.	Unit	Note
Core Diameter		9.5		µm	
Cladding Diameter		125		µm	
Outer Diameter		0.9		mm	
Optical Cord Tensile Break Strength			9.8	N	1
Bend Radius	30			mm	

⚠ Caution

⚠ Do not give undue force or impact to the optical fiber pigtail. A broken optical fiber may injure skin or human body, or a strong laser beam may cause eye injury. Operate the equipment carefully. Use assisting tools or prospective aids as required.

10. Characteristic Information

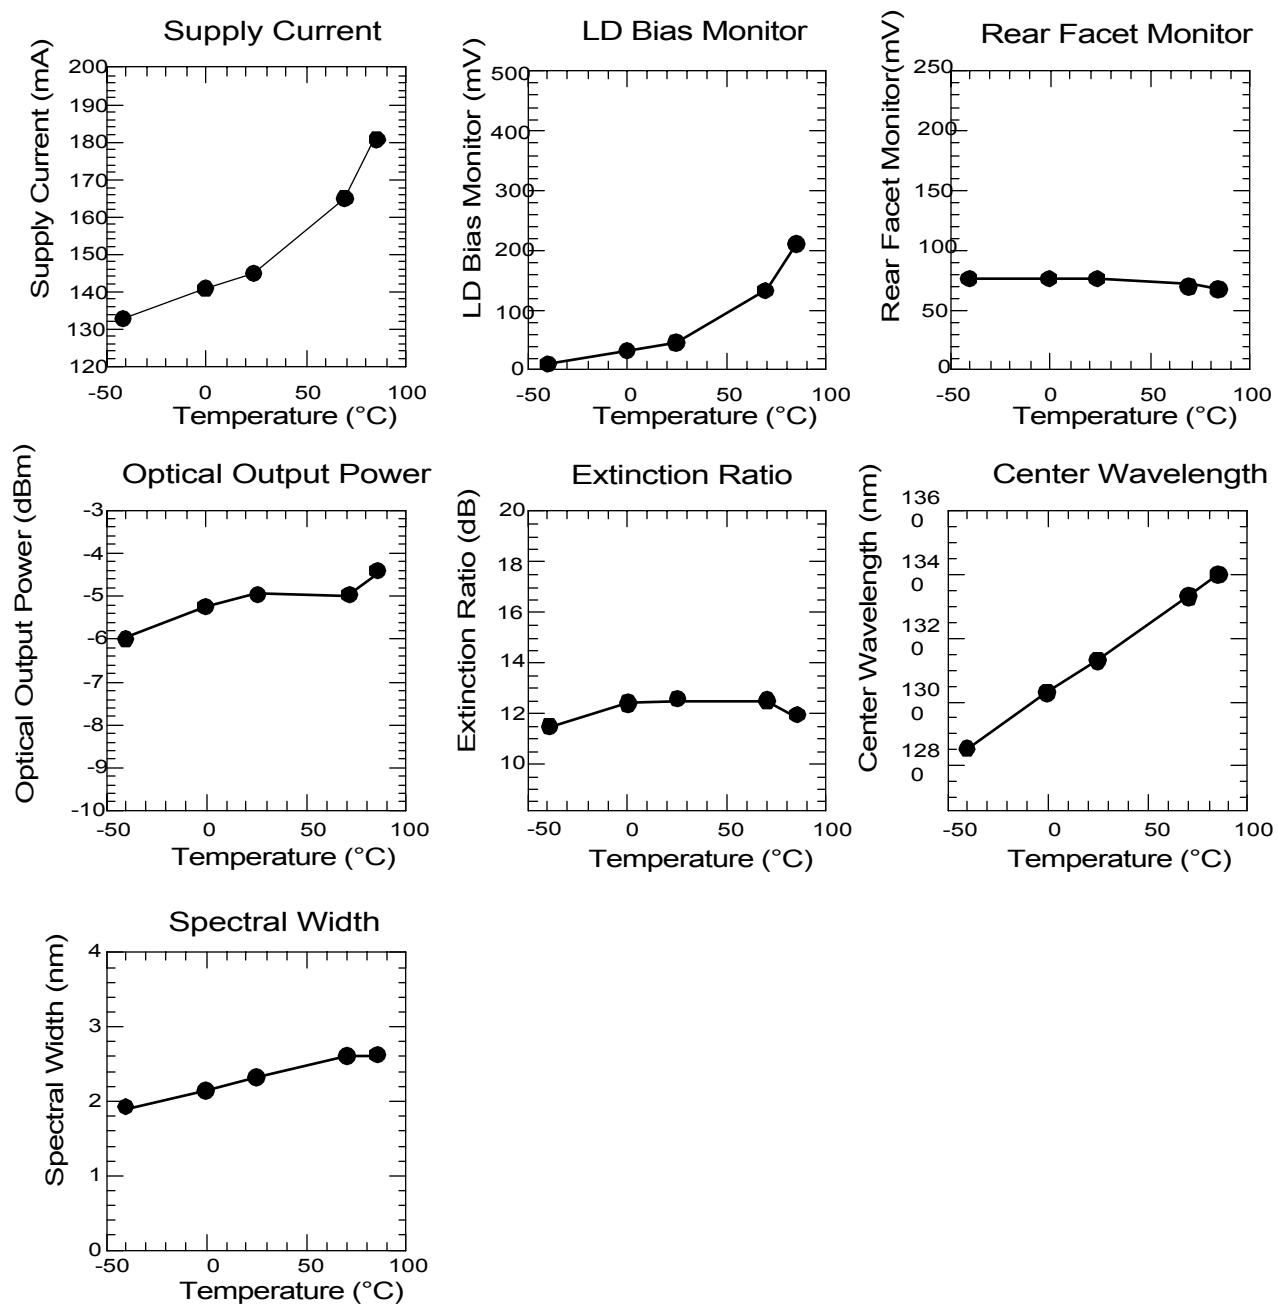


11. Reliability Test

Bellcore TA-NWT-000983 Issue 2, December 1993							
Heading	Test	Reference	Condition	Sampling			SEI Result
				LTPD	SS	C	
Mechanical Integrity	Mechanical Shock	MIL-STD-883 Method 2002	Condition B 5 times/axis 500G, 1.0 ms 1,500G, 0.5ms	20%	11	0	---
				20%	11	0	11 0
	Vibration	MIL-STD-883 Method 2007	Condition A 20 G 20-2,000 Hz 4 min/cycle; 4 cycles/axis	20%	11	0	11 0
	Thermal Shock	MIL-STD-883 Method 1011	ΔT=100°C	20%	11	0	11 0
	Solderability	MIL-STD-883 Method 2003	(steam aging not required)	20%	11	0	11 0
Endurance	Accel. Aging (High Temp.)	(R)-453 Section 5.18	+85C; rated power >5,000hrs.				
			>10,000hrs.	---	25	---	25 0
			max. storage T (T=85°C) >2,000	---	10	---	---
	High Temp. Storage	-----	min. storage T (T=-40°C) >2,000	20%	11	0	---
	Low Temp. Storage	Section 5.20	- 40°C to +85°C 400 times pass/fail 500 times for info.	20%	11	0	11 0
			500 times pass/fail 1000 times for info.	---	11	---	11 0
			40°C , 95%, 56days or 85°C /85%RH 2,000hrs	20%	11	0	11 0
			20%	11	0	---	---
	Damp Heat (if using epoxy)	MIL-STD-202 M103 or IEC 68-2-3	-----	20%	11	0	11 0
	Cyclic Moisture Resistance	Section 5.23	-----	20%	11	0	11 0
Special Tests	Internal Moisture	MIL-STD-883 Method 1018	< 5,000 ppm water vapor	20%	11	0	11 0
	Flammability	TR357:Sec. 4.4.2.5	-----	---	---	---	---
	ESD Threshold	Section 5.22	-----	---	6	---	6 0

12. Laser Safety

This product uses a semiconductor laser system and is a laser class 1 product acc. FDA, complies with 21CFR1040. 10 and 1040.11. Also this product is a laser class 1 product acc. IEC 825-1.

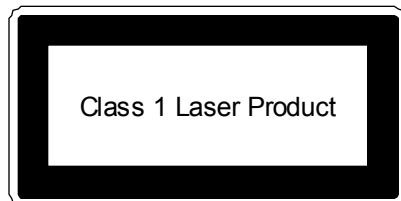

⚠ Caution



If this product is used under conditions not recommended in the specification or this product is used with unauthorized revision, classification for laser product safety standard is invalid. Classify the product again at your responsibility and take appropriate actions.

13. Ordering Information

Ordering Number	Pigtail length : L	Connector type
SDT8028-TC-QN	600 +/- 50mm	SC
SDT8028-TD-QN	600 +/- 50mm	FC / PC
SDT8028-TM-NN	450 +/- 50mm	MU-J
SDT8028-TU-NN	450 +/- 50mm	MU

14. Other Precaution

Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

The governmental approval is required to export this product to other countries. To dispose of these components, the appropriate procedure should be taken to prevent illegal exportation.

This module must be handled, used and disposed of according to your company's safe working practice.

⚠ Warning

- (!) Be sure to carry out correct soldering for connection to peripheral circuits in order to prevent contact failure or short-circuit. Otherwise, a strong laser beam may cause eye injury, overheating or fire.
- (🚫) Do not put this product or components of this product into your mouth. This product contains material harmful to health.

⚠ Caution

- (!) Be sure to turn the power off when you touch this product connected to the printed circuit boards. Otherwise, electric shock may occur.
- (🚫) Dispose this product or equipment including this product properly as an industrial waste according to the regulations.

15. For More Information

U.S.A.

ExceLight Communications, 4021 Stirrup Creek Drive, Suite 200 Durham, NC 27703

Tel. +1-919-361-1600 / Fax. +1-919-361-1619

E-mail: info@excelight.com

<http://www.excelight.com>

Europe

Sumitomo Electric Europe Ltd., 220, Centennial Park, Elstree, Herts, WD6 3SL, United Kingdom

Tel.+44-208-953-8681

Fax.+44-208-207-5950

E-mail: photronics@sumielectric.com

<http://www.sumielectric.com>

Japan

Sumitomo Electric Industries, Ltd. (International Business Division), 3-12, Moto-Akasaka 1-chome

Minato-ku Tokyo 107-8468

Tel. +81-3-3423-5771 / Fax. +81-3-3423-5099

E-mail: product-info@ppd.sei.co.jp

http://www.sei.co.jp/Electro-optic/index_e.html