

NON-ISOLATED DC/DC CONVERTERS

2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output



SRBA-06F1Ax Series

RoHS Compliant

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (300 kHz)
- Converter Can Sink and Source Current
- Under-voltage Lockout (UVLO)
- Wide Trim
- OCP/SCP
- Remote On/Off
- Active Low/High (option)



Description

The Bel SRBA-06F1Ax modules are a series of non-isolated dc/dc converters that deliver up to 6A of output current with full load efficiency of 93% at 3.3 V output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 V to 3.63 V over a wide range of input voltage (2.4 V-5.5 V). The open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, over current protection, short circuit protection, wide input, and programmable output voltage.

Part Selection

| Output Voltage | Input Voltage | Max. Output Current | Max. Output Power | Typical Efficiency | Model Number Active Low | Model Number Active High |
|------------------------------|---------------|---------------------|-------------------|--------------------|-------------------------|--------------------------|
| 0.75 V - 3.63 V ¹ | 2.4 V - 5.5 V | 6 A | 21.8 W | 93% | SRBA-06F1AL | SRBA-06F1A0 |

Notes: 1. These modules use a buck topology, so the output voltages must be 0.5 V less than the input voltage.
2. Add "G" to the end of the Model Number to indicate Tray Packaging.

Absolute Maximum Ratings

| Parameter | Min | Typ | Max | Notes |
|--------------------------------|--------|-----|--------|-------|
| Input Voltage (continuous) | -0.3 V | - | 5.8 V | |
| Output Enable Terminal Voltage | -0.3 V | - | 5.5 V | |
| Ambient Temperature | -40 °C | - | 85 °C | |
| Storage Temperature | -55 °C | - | 125 °C | |

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS
2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output



Input Specifications

| Parameter | Min | Typ | Max | Notes |
|--|-------|--------|-----------------------|---|
| Input Voltage | 2.4 V | - | 5.5 V | $V_o, \text{set} \leq Vin - 0.5 \text{ V}$ |
| Input Current (full load) | | | | |
| $V_o=3.3 \text{V}$ | - | - | 4.73 A | |
| $V_o=2.5 \text{V}$ | - | - | 3.66 A | |
| $V_o=1.8 \text{V}$ | - | - | 4.09 A | |
| $V_o=1.5 \text{V}$ | - | - | 4.31 A | |
| $V_o=1.2 \text{V}$ | - | - | 3.57 A | |
| $V_o=0.75 \text{V}$ | - | - | 2.40 A | |
| Input Current (no load) | | | | |
| $V_o=3.3 \text{ V}$ | - | 50 mA | - | |
| $V_o=0.75 \text{ V}$ | - | 25 mA | - | |
| Remote Off Input Current | - | 0.6 mA | - | |
| Input Reflected Ripple Current (pk-pk) | - | 120 mA | - | Tested with simulated source impedance of 1 uH, 5 Hz to 20 MHz, one 1000 uF/25 V AL capacitor and two 100 uF/ 10 V Tantalum capacitor at the input. |
| Input Reflected Ripple Current (rms) | - | 35 mA | - | |
| I^2t Inrush Current Transient | - | - | 0.04 A ² s | |
| Turn-on Voltage Threshold | - | 2.05 V | 2.4 V | |
| Turn-off Voltage Threshold | 1.8 V | 2.0 V | - | |

Output Specifications

| Parameter | Min | Typ | Max | Notes |
|---|---|------------------------|----------------------|--|
| Output Voltage Set Point | -2% V_o, set | - | 2% V_o, set | $Vin=5 \text{ V}, Io=50\%Io,max$ |
| Output Voltage Set Point | -3% V_o, set | - | 3% V_o, set | Over all operating input voltages, resistive loads and temperature conditions |
| Adjustment Range Selected by External Resistor or Voltage | 0.7525 V | - | 3.63 V | |
| Load Regulation | - | 0.4% V_o, set | - | $Io=Io, \text{min to } 50\%Io, \text{max}$ |
| Line Regulation | - | 0.3% V_o, set | - | $Vin=50\% Vin, \text{min to } Vin, \text{max}$ |
| Regulation Over Temperature (-40 °C to +85 °C) | - | 0.4% V_o, set | - | $Tref=Ta, \text{min to } Ta, \text{max}$ |
| Output Current | 0 A | - | 6 A | |
| Current Limit Threshold | 9 A | - | 18 A | |
| Short Circuit Surge Transient | - | 0.32 A ² s | - | |
| Ripple and Noise (pk-pk) | - | 40 mV | 70 mV | Tested with 0-20 MHz, with 10 uF Tantalum capacitor & 1 uF/10 V ceramic capacitor at the output. |
| Ripple and Noise (rms) | - | 10 mV | 30 mV | |
| Turn on Time | - | 6 mS | 10 mS | |
| Overshoot at Turn on | - | - | 3% | |
| Output Capacitance | | | | |
| $ESR \geq 1\text{mohm}$ | 0 uF | - | 1000 uF | |
| $ESR \geq 10\text{mohm}$ | 0 uF | - | 3000 uF | |
| Transient Response | | | | |
| 50% ~ 100% Max Load | $V_o = 0.75 \text{ V} - 3.63 \text{ V}$ | - | 130 mV | - |
| Settling Time | | - | 25 uS | - |
| 100% ~ 50% Max Load | | - | 130 mV | - |
| Settling Time | | - | 25 uS | - |

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output



General Specifications

| Parameter | Min | Typ | Max | Notes |
|---------------------------|---|---------|---------|---|
| Efficiency | Vo=3.3 V | - | 93% | Measured at Vin=5 V, full load |
| | Vo=2.5 V | - | 91% | |
| | Vo=1.8 V | - | 88% | |
| | Vo=1.5 V | - | 87% | |
| | Vo=1.2 V | - | 84% | |
| | Vo=0.75 V | - | 78% | |
| Switching Frequency | 250 kHz | 300 kHz | 350 kHz | |
| Over Temperature Shutdown | - | 135 °C | - | |
| Output Voltage Trim Range | 0.7525 V | - | 3.63 V | |
| MTBF | 6,954,974 hours | | | Calculated Per Bell Core SR-332 (Vin=5 V; Vo=0.75 V; Io = 4.8 A; Ta = 25°C) |
| Dimensions | Inches (L × W × H) Millimeters (L × W × H) | | | 1.0 x 0.5 x 0.243 25.4 x 12.7 x 6.16 |
| Weight | - | 5 g | - | |

Note: All specifications are typical at 25 °C unless otherwise stated.


Control Specifications

| Parameter | Min | Typ | Max | Notes |
|------------------------|--------|-----|----------|--|
| Remote On/Off | | | | |
| Signal Low (Unit Off) | -0.2 V | - | 0.3 V | SRBA-06F1A0; Remote On/Off pin open, Unit off. |
| Signal High (Unit On) | - | - | Vin, max | |
| Signal Low (Unit On) | -0.2 V | - | 0.3 V | SRBA-06F1AL; Remote On/Off pin open, Unit on. |
| Signal High (Unit Off) | 1.5 V | - | Vin, max | |

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{21.07}{V_{adj} - 0.7525} - 5.11$$

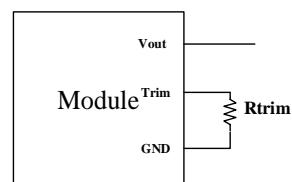

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (Vadj) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.







$$V_{trim} = 0.7 - 0.1698 \times (V_{adj} - 0.7525)$$

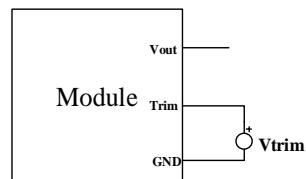

NON-ISOLATED DC/DC CONVERTERS
2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output




Efficiency Data

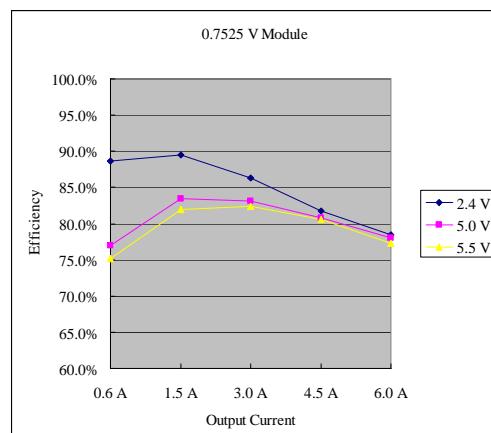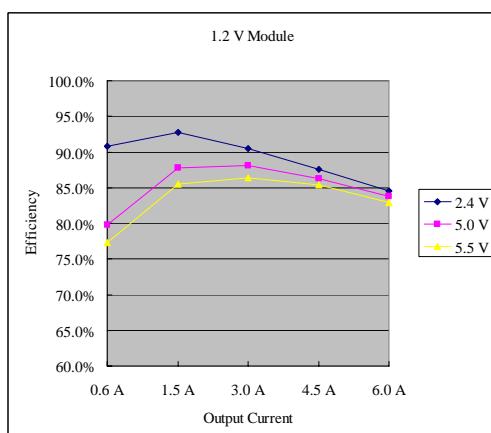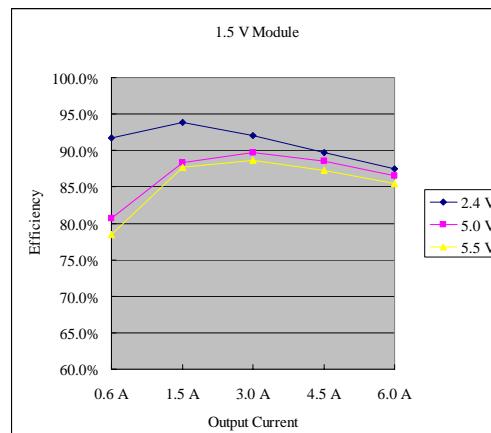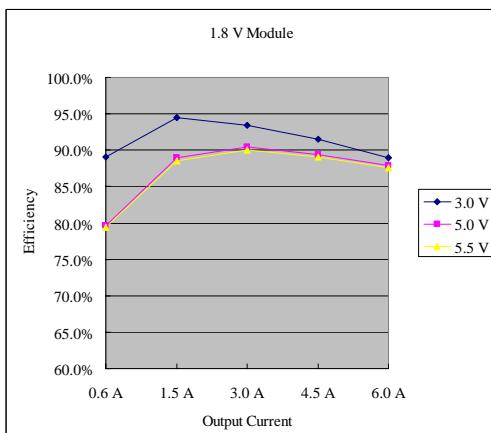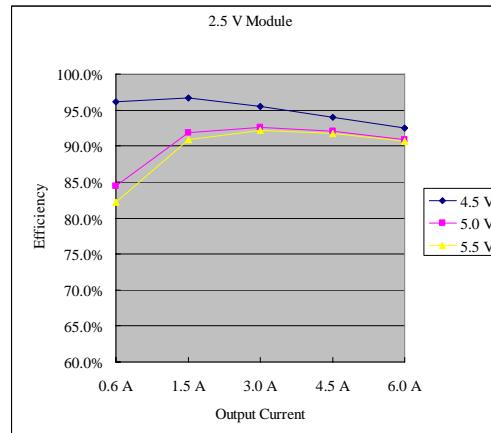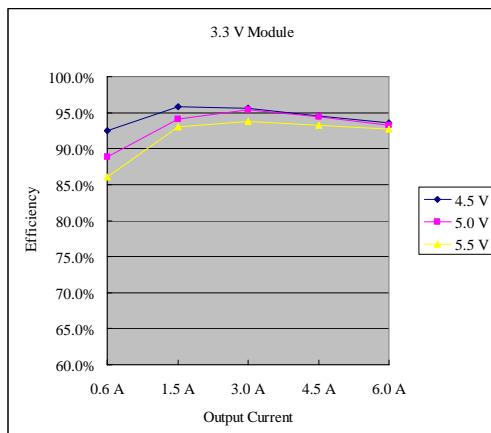


NON-ISOLATED DC/DC CONVERTERS
2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output




Thermal Derating Curves

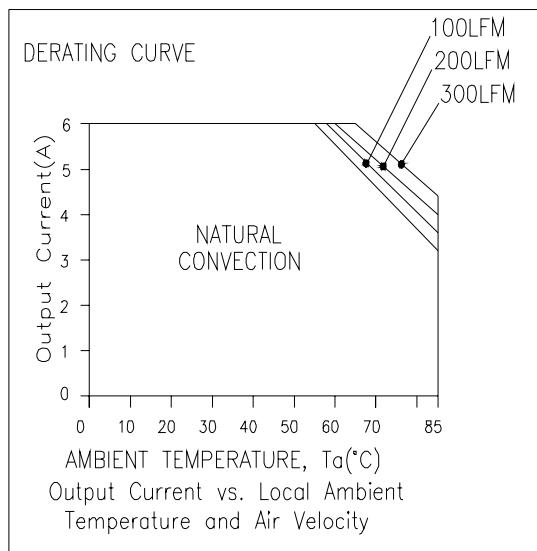


Vin=5 V, Vo = 3.3 V

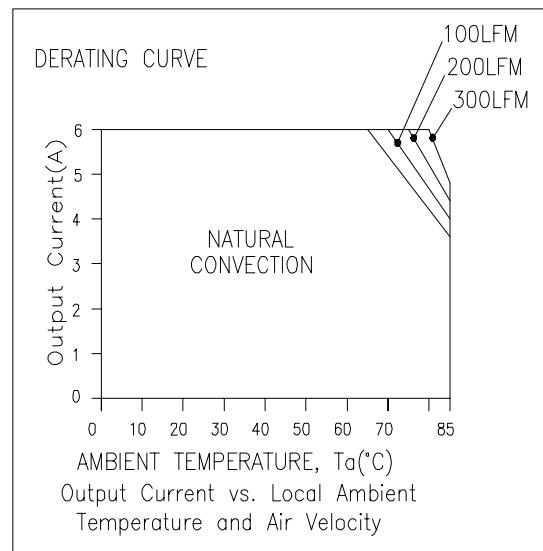

Vin=5 V, Vo = 0.75 V

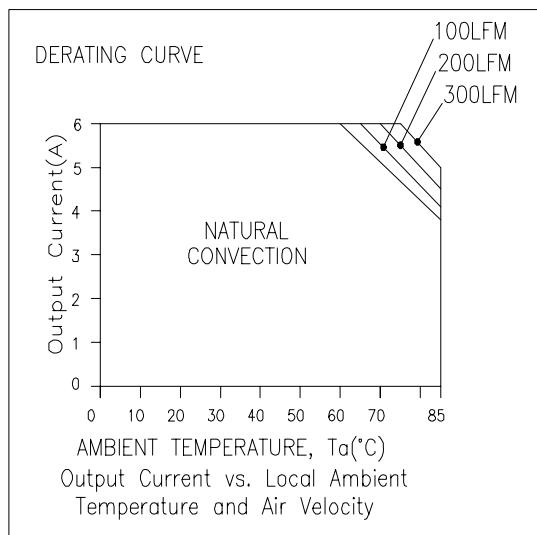

Vin=4.5 V, Vo = 2.5 V

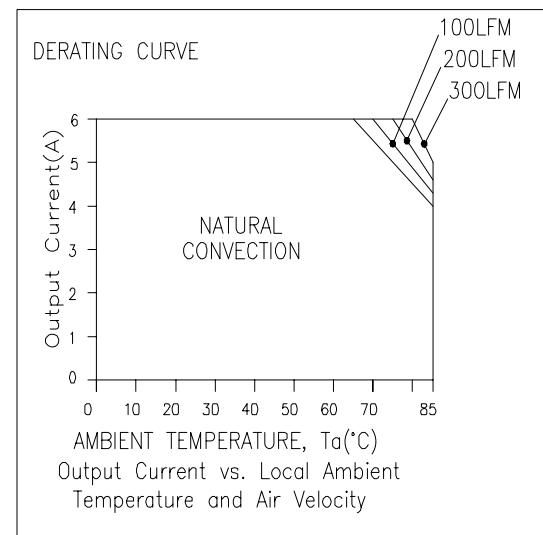



Vin=3.3 V, Vo = 0.75 V

NON-ISOLATED DC/DC CONVERTERS

2.4 V-5.5 V Input 0.75 V-3.63 V/6 A Output



Mechanical Outline

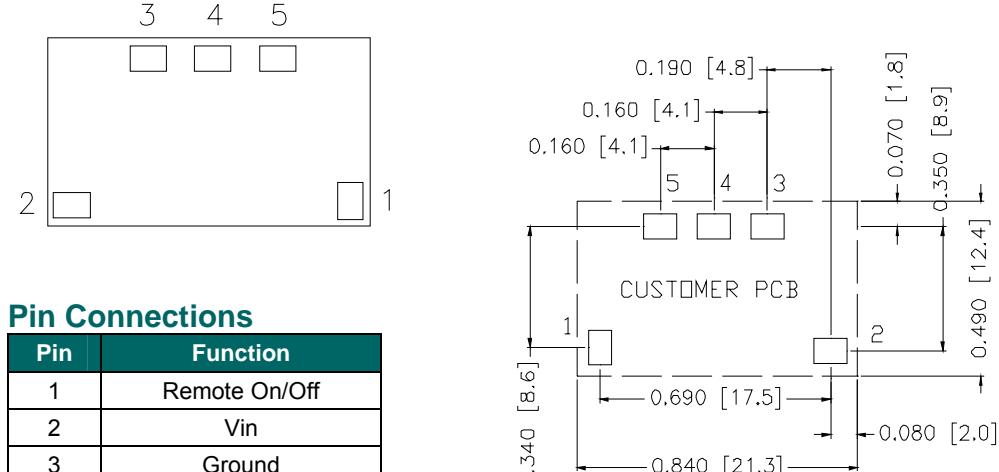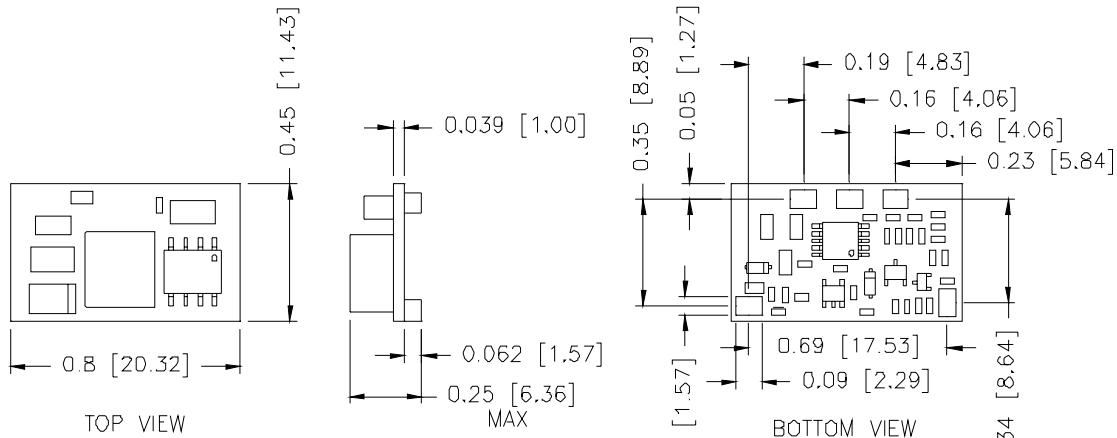

Pin Connections

| Pin | Function |
|-----|---------------|
| 1 | Remote On/Off |
| 2 | Vin |
| 3 | Ground |
| 4 | Trim |
| 5 | Vout |

PAD SIZE:

MIN: 0.12" * 0.095" (3.05mm * 2.41mm)
MAX: 0.135" * 0.11" (3.43mm * 2.79mm)

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2005 Bel Fuse Inc. Specifications subject to change without notice. 121305

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com