



## UM3758 Series

### Tri-State Programmable Encoder/Decoder

#### Features

- Single-Chip CMOS construction
- Single-Chip **encoder/decoder** selected by jump wire
- Wide operating voltage range : V<sub>Do</sub> = 3 to 12 Volts
- Built-in RC oscillator (can use 5 % resistor)
- Easy interface with RF, **Infrared(IR)** and **Ultrasonic** transmission media
- Tri-state(0, 1, open) address codes, some of address

codes used as data **codes** or as internal addresses by mask **option**

- Internal address **code** is **18-bit**, ie  $3^{18} = 387,428, 489$  different **codes** at most
- Decoder has **8-bit** latch data
- Series IC for various applications
- **UM3758-120A** pin outcompatible to UM3750



#### General Description





The UM3758 series are **single-chip** programmable **encoder/decoder** ICs fabricated in CMOS structure for low power consumption. They are enhanced for new stage encoder/decoder ICs to provide many more combinations for **higher security**.

Most combinations are achieved by **UM3758-180A**, providing  $3^{18} = 387,420,489$  combinations. Some ICs of this series provide 4 to 8 data bits for controlling.

According to the following information, The **internal address bits**, **18 bits/24-pin** and **12 bits/18-pin package**, can be assigned by customer in **advance** for **much higher security** and confidentialii. Whenever the address **codes** of **transmitter** transmits, the **receiver** will check the address codes with his own and the successive two **matched** address codes will generate a low pulse. If there were any data bits, the **receiver** will latch these data bis at the corresponding pins for controlling.

#### Pin Configurations

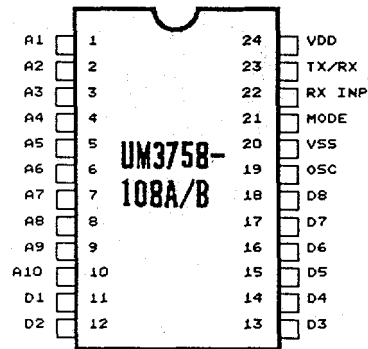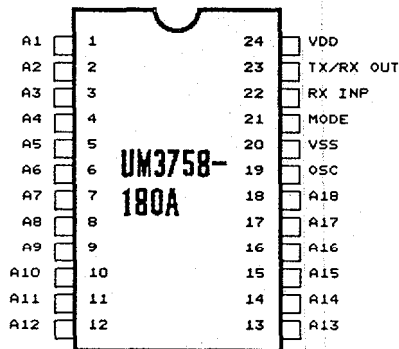

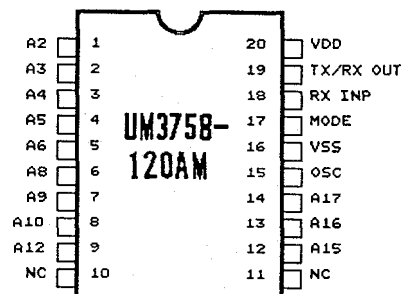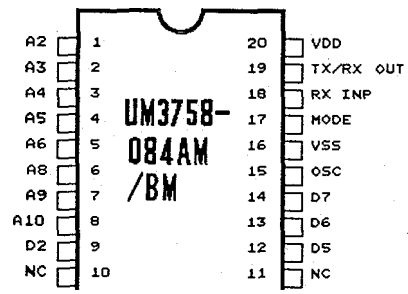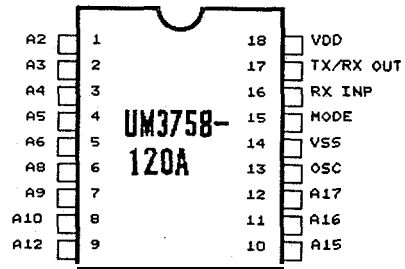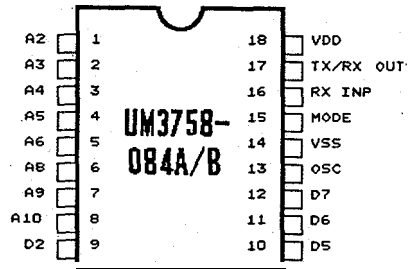**Pin Configurations (Continued)**

**Absolute Maximum Ratings\***

Power Supply Voltage . . . . . -0.3V to 11V  
 Operating Temperature . . . . . -20°C to 70°C  
 Storage Temperature (Tstg) . . . . . -55°C to 150°C  
 Apply Voltage on any Pin . . . . .  
 $V_{SS} - 0.3 < V_{IN} < V_{DD} + 0.3$

**\*Comments**

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only. Functional Operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied and exposure to absolute

**DC Electrical Characteristics**

( $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 9$  Volts,  $V_{SS} = 0\text{V}$  unless otherwise specified)

| Parameter                   | Symbol    | Min. | Typ. | Max. | Unit | Conditions                                    |
|-----------------------------|-----------|------|------|------|------|---|
| Operating voltage           | $V_{DD}$  | 3.0  |      | 12   | V    |   |
| Operating current           | $I_{op}$  | -    |      | 1.2  | mA   |   |
| Schmitt Trigger input level | $V_{sh}$  | 6    | -    |      | V    | HIGH  |
|                             | $V_{sl}$  | -    | -    | 2    | V    | LOW   |
| Other pins input level      | $V_{ih}$  | 8.5  |      | 9    | V    | HIGH  |
|                             | $V_{il}$  | 0    |      | 0.5  | v    | LOW   |
| Output pin logic level      | $V_{oh}$  | 8.5  |      | 9    | V    | HIGH  |
|                             | $V_{ol}$  | 0    |      | 1    | v    | LOW   |
| DATA output current         | $I_{ohd}$ | 9    |      |      | mA   | $V_{DD} = 12\text{V}$<br>$V_{oh} = 6\text{V}$ |
|                             | $I_{old}$ | 9    |      |      | mA   | $V_{ol} = 6\text{V}$                          |

**DC Electrical Characteristics (Continued)**

| Parameter                                       | Symbol       | Min.     | Typ. | Max. | Unit     | Conditions                          |
|---|--------------|----------|------|------|----------|-------------------------------------|
| TX/RX OUTput current<br>HIGH level<br>LOW level | Ioht<br>Iolt | 35<br>15 |      |      | mA<br>mA | VDD = 12V<br>Voh = 6V<br>Vol = 6V   |
| Operating frequency                             | F            | -        | 160  |      | KHz      | + 15% exclusive<br>of external part |

**Pin Descriptions**
**1. UM3758-180A/AM, UM3758-120A and UM3758-120AM**

| Pin Number             |                 |                  | Designation | Description  |
|------------------------|-----------------|------------------|-------------|--|
| UM3758<br>-180A<br>/AM | UM3758<br>-120A | UM3758<br>-120AM |             |  |
| 1                      |                 |                  | A1          | Address select line 1 is tri-state indicated as 0, 1 and open  |
| 2                      | 1               | 1                | A2          | Address select line 2 is tri-state indicated as 0, 1 and open  |
| 3                      | 2               | 2                | A3          | Address select line 3 is tri-state indicated as 0, 1 and open  |
| 4                      | 3               | 3                | A4          | Address select line 4 is tri-state indicated as 0, 1 and open  |
| 5                      | 4               | 4                | A5          | Address select line 5 is tri-state indicated as 0, 1 and open  |
| 6                      | 5               | 5                | A6          | Address select line 6 is tri-state indicated as 0, 1 and open  |
| 7                      |                 |                  | A7          | Address select line 7 is tri-state indicated as 0, 1 and open  |
| 8                      | 6               | 6                | A8          | Address select line 8 is tri-state indicated as 0, 1 and open  |
| 9                      | 7               | 7                | A9          | Address select line 9 is tri-state indicated as 0, 1 and open  |
| 10                     | 8               | 8                | A10         | Address select line 10 is tri-state indicated as 0, 1 and open |
| 11                     | -               | -                | A11         | Address select line 11 is tri-state indicated as 0, 1 and open |

## Pin Descriptions (Continued)

| Pin Number             |                 |                  | Designation | Description   |
|------------------------|-----------------|------------------|-------------|---|
| UM3758<br>-180A<br>/AM | UM3758<br>-120A | UM3758<br>-120AM |             |   |
| 12                     | 9               | 9                | A12         | Address select line 12 is tri-state indicated as 0, 1 and open  |
|                        |                 | 10               | NC          | No connection   |
|                        |                 | 11               | NC          | Noconnection  |
| 13                     |                 | —                | A13         | Address select line 13 is tri-state indicated as 0, 1 and open  |
| 14                     | —               |                  | A14         | Address select line 14 is tri-state indicated as 0, 1 and open  |
| 15                     | 10              | 12               | A15         | Address select line 15 is tri-state indicated as 0, 1 and open  |
| 16                     | 11              | 13               | A16         | Address select line 16 is tri-state indicated as 0, 1 and open  |
| 17                     | 12              | 14               | A17         | Address select line 17 is tri-state indicated as 0, 1 and open  |
| 16                     |                 | —                | <b>A18</b>  | Address select line 16 is tri-state indicated as 0, 1 and open  |
| 19                     | 13              | 15               | o s c       | R.C. input pin for single pin oscillator. A resistor is connected from this pin to V <sub>DD</sub> and a capacitor to V <sub>SS</sub> |
| 20                     | 14              | 16               | v s s       | The ground pin for UM3756   |
| 21                     | 15              | 17               | MODE        | This pin is used to select transmit or receive mode<br>MODE — V <sub>DD</sub> : Encoder mode<br>MODE — V <sub>SS</sub> : Decoder mode |
| 22                     | 16              | 18               | RXINP       | <b>Receiver</b> input pin. Receives waveform from the detect circuit  |
| 23                     | 17              | 19               | TX/RX OUT   | In <b>encoder</b> mode, this pin will transmit waveform; in <b>decoder</b> mode, this pin will switch to LOW if comparison is OK      |
| 24                     | 18              | 20               | VDD         | The positive power supply of UM3756   |



2. UM3758-108A/B/AM/BM, UM3758-084A/B and UM3758-084AM/BM

| Pin Number                |                       |                         | a t t i o n | Description  |
|---------------------------|-----------------------|-------------------------|-------------|--|
| UM3758<br>108A/B<br>AM/BM | UM3758<br>-084<br>A/B | UM3758<br>-084AM<br>/BM |             |  |
| 1                         | -                     | -                       | A1          | Address select line 1 is tri-state indicated as 0, 1 and open    |
| 2                         | 1                     | 1                       | A2          | Address select line 2 is tri-state indicated as 0, 1 and open    |
| 3                         | 2                     | 2                       | A3          | Address select line 3 is tri-state indicated as 0, 1 and open    |
| 4                         | 3                     | 3                       | A4          | Address select line 4 is tri-state indicated as 0, 1 and open    |
| 5                         | 4                     | 4                       | A5          | Address select line 5 is tri-state indicated as 0, 1 and open    |
| 6                         | 5                     | 5                       | A6          | Address select line 6 is tri-state indicated as 0, 1 and open    |
| 7                         | -                     | -                       | A7          | Address select line 7 is tri-state indicated as 0, 1 and open    |
| a                         | 6                     | 6                       | A8          | Address select line 8 is tri-state indicated as 0, 1 and open    |
| 9                         | 7                     | 7                       | A9          | Address select line 9 is tri-state indicated as 0, 1 and open    |
| 10                        | a                     | 8                       | A10         | Address select line 10 is tri-state indicated as 0, 1 and open   |
| 11                        |                       |                         | D1          | Data output pin 1, states are either HIGH (1 or open) or LOW (0) |
| 12                        | 9                     | 9                       | D2          | Data output pin 2, states are either HIGH (1 or open) or LOW (0) |

**Pin Descriptions (Continued)**

| Pin Number                  |                       |                         | Designation | Description  |
|-----------------------------|-----------------------|-------------------------|-------------|--|
| UM3758<br>-108A/B<br>/AM/BM | UM3758<br>-084<br>A/B | UM3758<br>-084AM<br>/BM |             |  |
| -                           |                       | 10                      | NC          | Noconnection   |
|                             |                       | 11                      | NC          | No connection  |
| 13                          |                       | -                       | D3          | Data output pin 3, states are either HIGH (1 or open) or LOW (0)   |
| 14                          | -                     | -                       | D4          | Data output pin 4, states are either HIGH (1 or open) or LOW (0)   |
| 15                          | 10                    | 12                      | D5          | Data output pin 5, states are either HIGH (1 or open) or LOW (0)   |
| 16                          | 11                    | 13                      | D6          | Data output pin 6, states are either HIGH (1 or open) or LOW (0)   |
| 17                          | 12                    | 14                      | D7          | Data output pin 7, states are either HIGH (1 or open) or LOW (0)   |
| 18                          | -                     |                         | D8          | Data output pin 6, states are either <b>HIGH</b> (1 or open) or LOW (0)  |
| 19                          | 13                    | 15                      | osc         | R.C. input pin for single pin oscillator. A resistor is connected from this pin to V <sub>Do</sub> and a capacitor to V <sub>ss</sub>  |
| 20                          | 14                    | 16                      | vss         | The ground pin for UM3756  |
| 21                          | 15                    | 17                      | MODE        | This pin is used to select transmit or receive modes<br>MODE — V <sub>Do</sub> : Encoder mode<br>MODE — V <sub>ss</sub> : Decoder mode |
| 22                          | 16                    | 18                      | RXINP       | Receiver input pin. Receives waveform from the detect circuit  |
| 23                          | 17                    | 19                      | TX/RX OUT   | In encoder mode, this pin will transmit waveform; in decoder mode, this pin will switch to LOW if comparison is OK                     |
| 24                          | 18                    | 20                      | VDD         | The positive power supply of UM3756  |

## Functional Description

### General

The operating mode of the UM3756 series is controlled by the MODE pin. When the 'MODE' pin is connected to VDD the circuit will automatically switch to encoder mode, then "TX/RX OUT" pin acts as data out pin and 'RX INP' pin act as an idle pin. When 'MODE' pin is connected to VSS the circuit will switch to decoder mode, then "TX/RX OUT" pin will switch to LOW if comparison is OK, otherwise this pin will keep HIGH, and "RX/INP" receives waveform from detect circuit.

### Encoder Mode

The encoder mode is selected by connecting "MODE" pin to VDD.

The transmit sequence is initiated by the power connection and continuously transmits till power down.

Each transmitted address bit is encoded into address

pulses (see Fig. 1). A logic zero is encoded as two consecutive long pulses, a logic one as two consecutive short pulses and an open as a long pulse followed by a short pulse. Each transmitted data bit is encoded into logic zero or one and the data pulse is the same as the address pulse (see Fig. 1), ie., the state of data pin is either one or zero. The data is one when connected to VDD or open and zero when connected to VSS.

The UM3758-180A samples the 18 bit tri-state address and encodes this parallel address data for transmitting. These 16 address pins may be in either of three states (0, 1, open) allowing  $3^{18} = 387,420,489$  possible combinations then the UM3758-120A provides 12-bit address and allows  $3^{12} = 531,441$  possible combinations.

The UM3758-108A/B and UM3758-084A/B provide address bits and data bits, as described in Table 1.

| Part Number         | Address Bits | Address Combinations | Data Bits | Data Combinations |
|---------------------|--------------|----------------------|-----------|-------------------|
| UM3758-108A/B/AM/BM | 10           | 59,049               | 8         | 256               |
| UM3758-084A/B/AM/BM | a            | 6,561                | 4         | 16                |

Table 1

### Decoder Mode

The decoder mode is selected by connecting "MODE" pin to vss.

The decoder receives the serial data from the detect circuit and outputs the comparison result or data, if it is valid. The received data may include two types — without data and with data.

For decoder without data ICs, such as UM3758-180A and UM3758-120A the address word is examined bit by bit as received; if two successive address words match the address bis of decoder, the "TX/RX OUT" pin will switch to LOW and two successive unmatched address words will cause "TX/RX OUT" pin to return to HIGH (see Fig. 3-1).

For decoder with data IC, such as UM3758-108A/B and UM3758-084A/B, the address word with data word are examined bit by bi as received. The first 10 bits

(ex. UM3758-108A/B) are assumed to be address bi. If the address bits match the address bits from detect circuit, the next eight data bits are stored and matched to the last valid data stored. When the second word with data is received, the address bis must match again, and if it does, the data bits are checked against the previous stored data biis. If the two words (eight bits data each) of data match, the data is transferred to the output data pins (D1, D2 to D8). If the decoder is momentary type, the data pins will latch the data till the "TX/RX OUT" pin switches to HIGH; for latch decoder, the data pins will latch the data till the next valid data appears (see Fig. 3-2). Although the address bits are tri-state (0, 1, open), the data information must be either one or zero. An open state will be decoded as a logic one. The above table (Table 1) also describes these (decoder with data).

## Timing Waveforms

### Tri-State Encoded Pulses

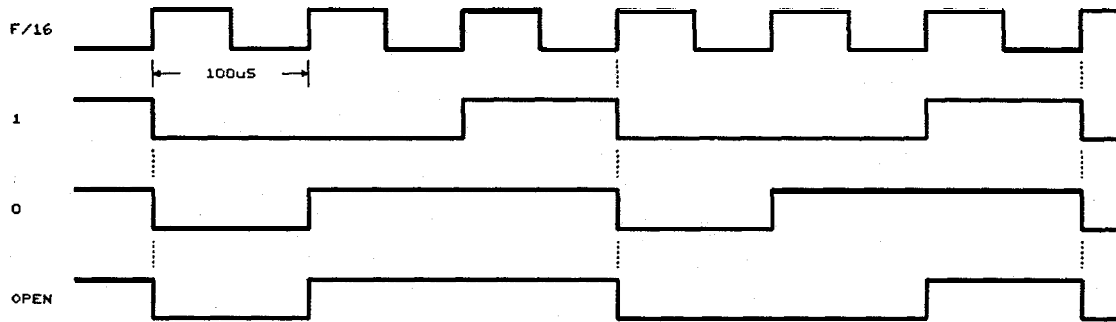


Fig. 1

### Encoder Mode

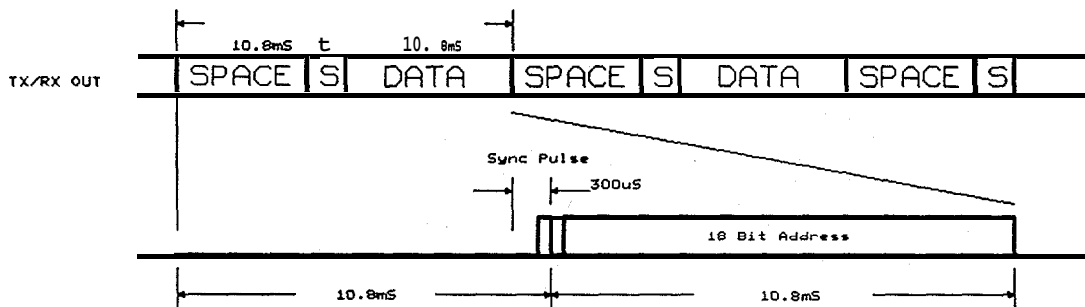


Fig. 2

### Decoder Mode (without data) :

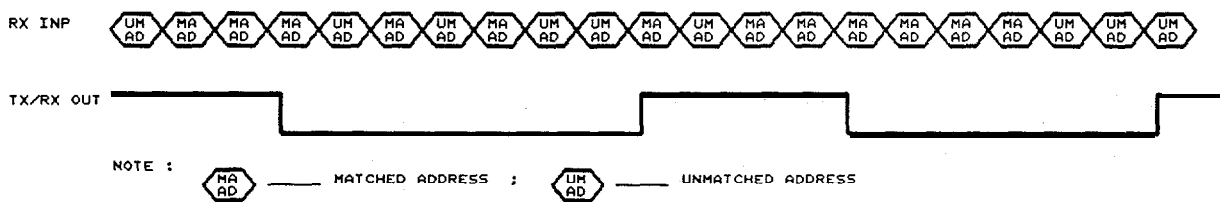


Fig. 3-1



**Timing Waveforms (Continued)**

Decoder Mode (with data) :

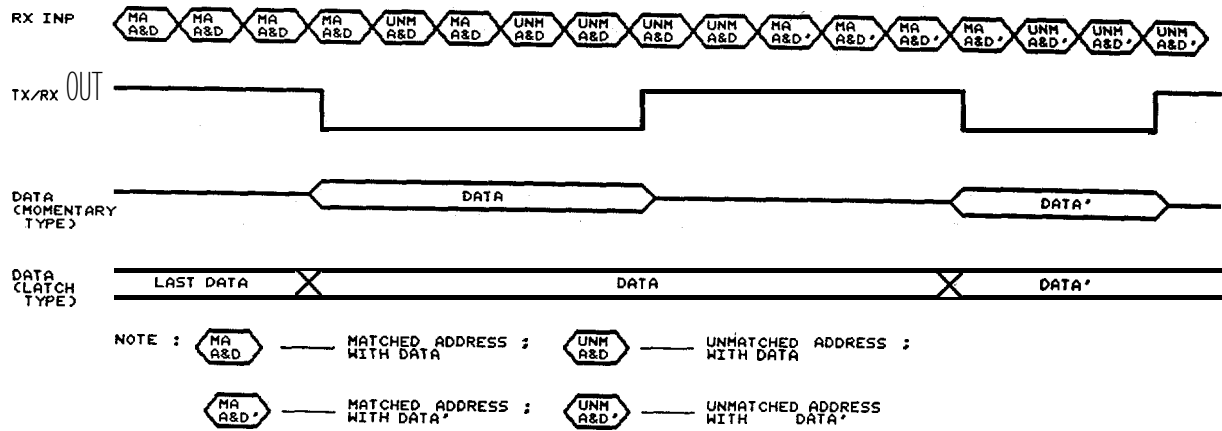
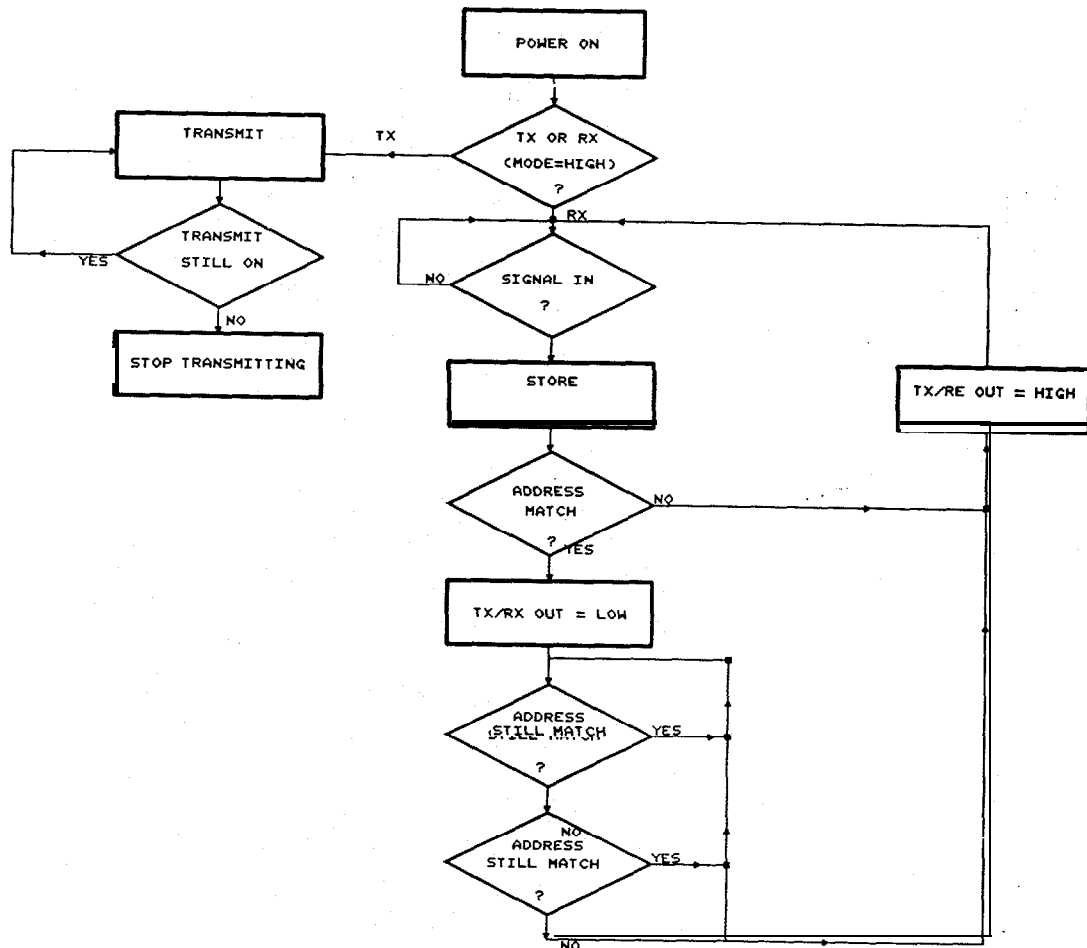
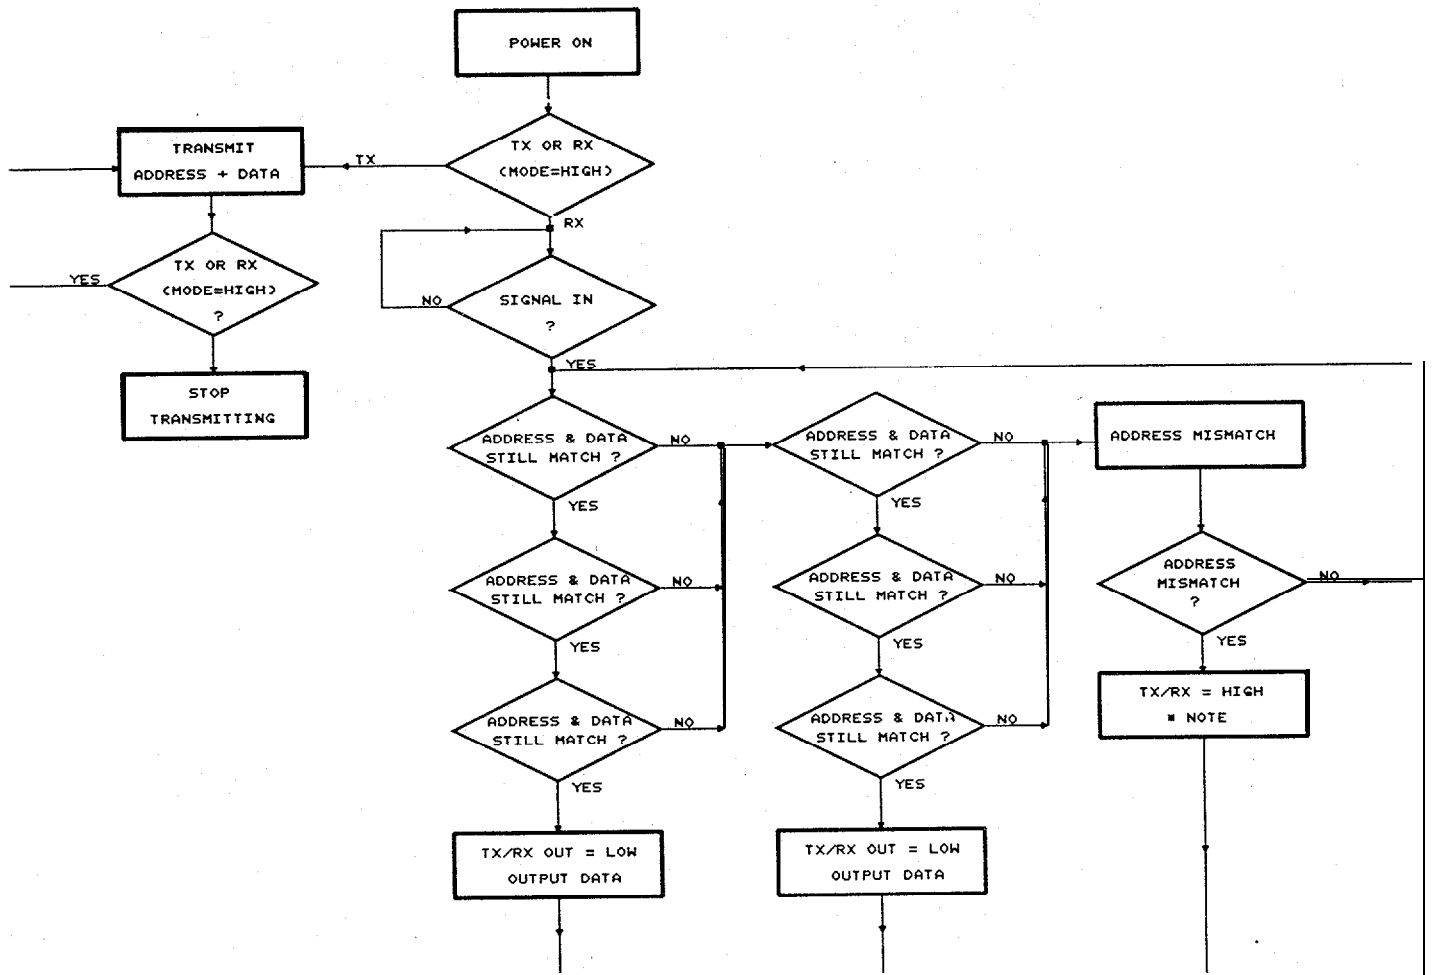



Fig. 3 -2

**UM3758 Operation Flowchart (without data bit)**


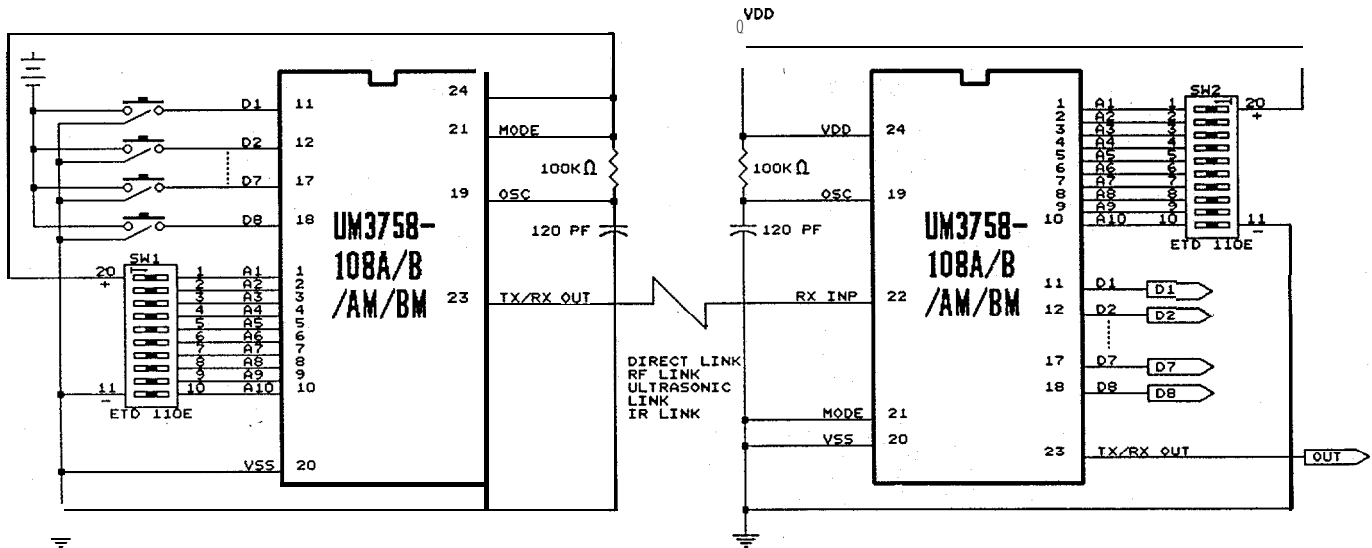
**UM3758 Operation Flowchart (with data bit)**


\* Note : For LATCH Type ————— Keep current data  
 For MOMENTARY Type ——— All Data fall to LOW

\* Address MISMATCH INCLUDES " NO SIGNAL IN ".

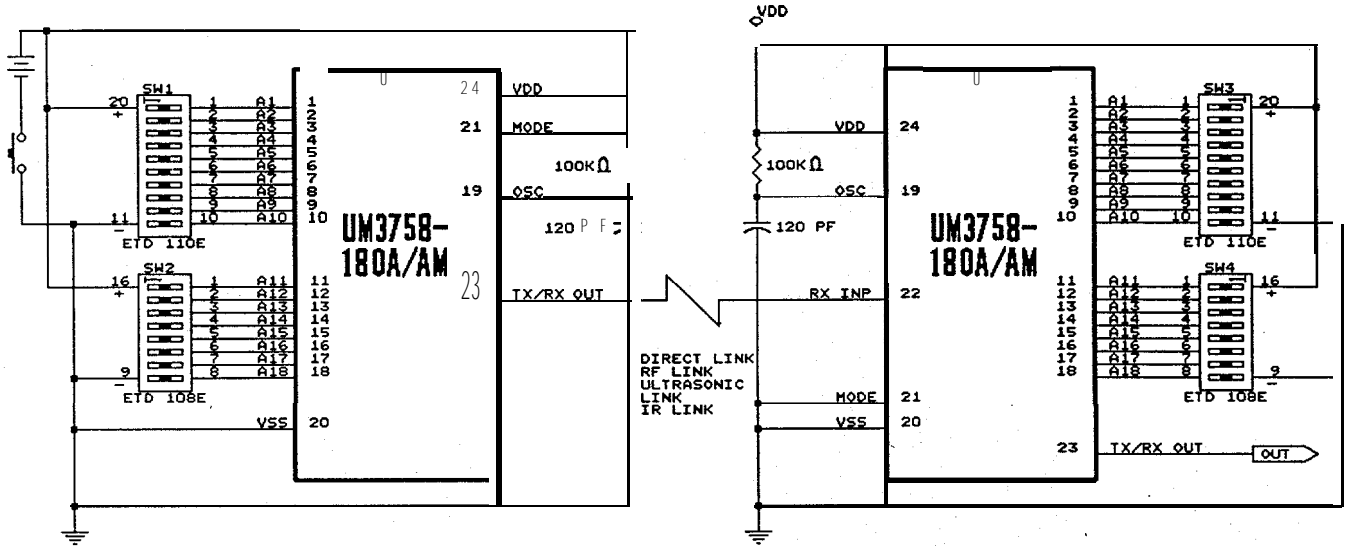**Application Circuit (without data bit)**

**Application Circuits (with data bit)**

(A) Use Three-Contact Pushbutton




Note: ETD 108E — 8-Pin Tri-State DIP switch made by EXCEL CELL ELECTRONIC CO., LTD. IN TAIWAN R.O.C.

ETD 110E — 10-Pin Tri-State DIP switch made by EXCEL CELL ELECTRONIC CO., LTD. IN TAIWAN R.O.C.


## Application Circuits (Continued)

## (B) Use Normal Two-Contact Pushbutton

## (B) — 1 Application Circuit with Data Bit High to Low

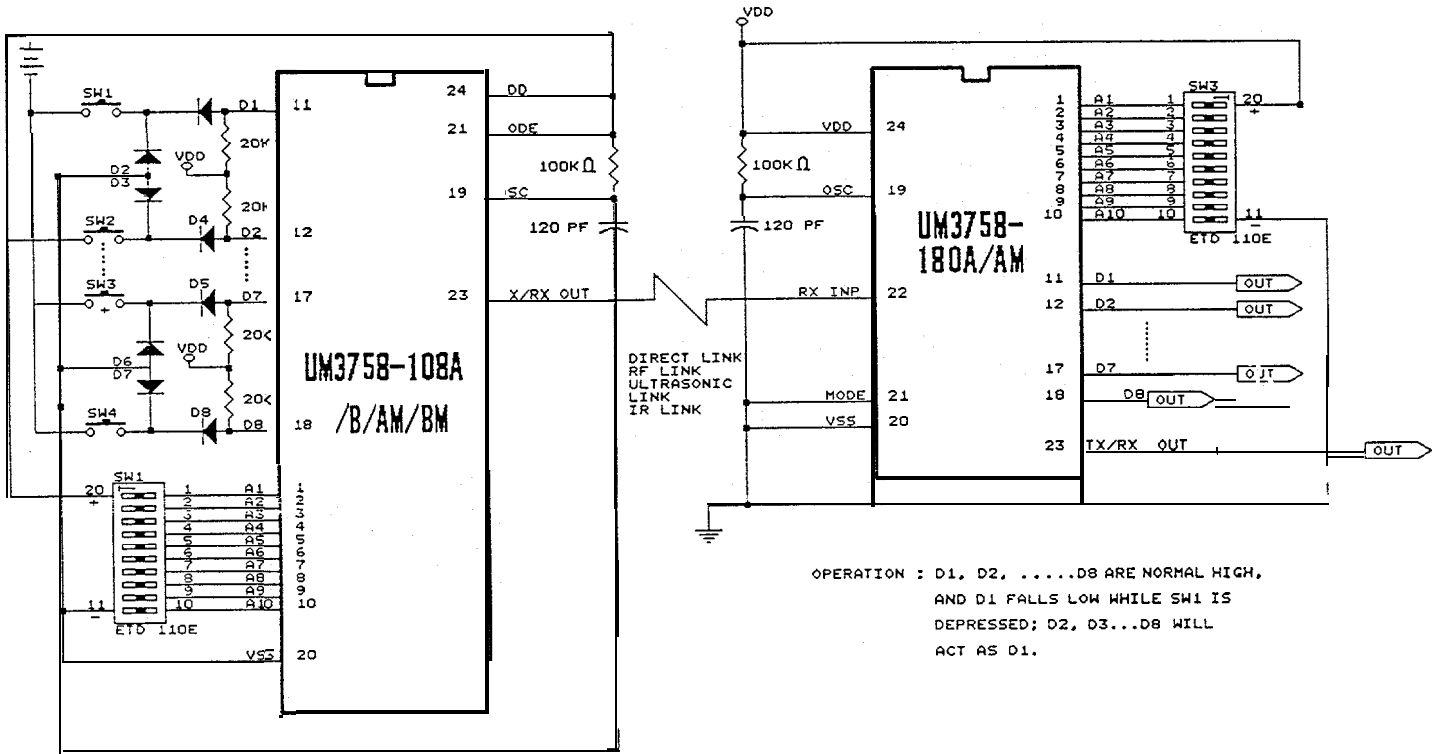

## (B) — 2 Application Circuit with Data Bit Low to High

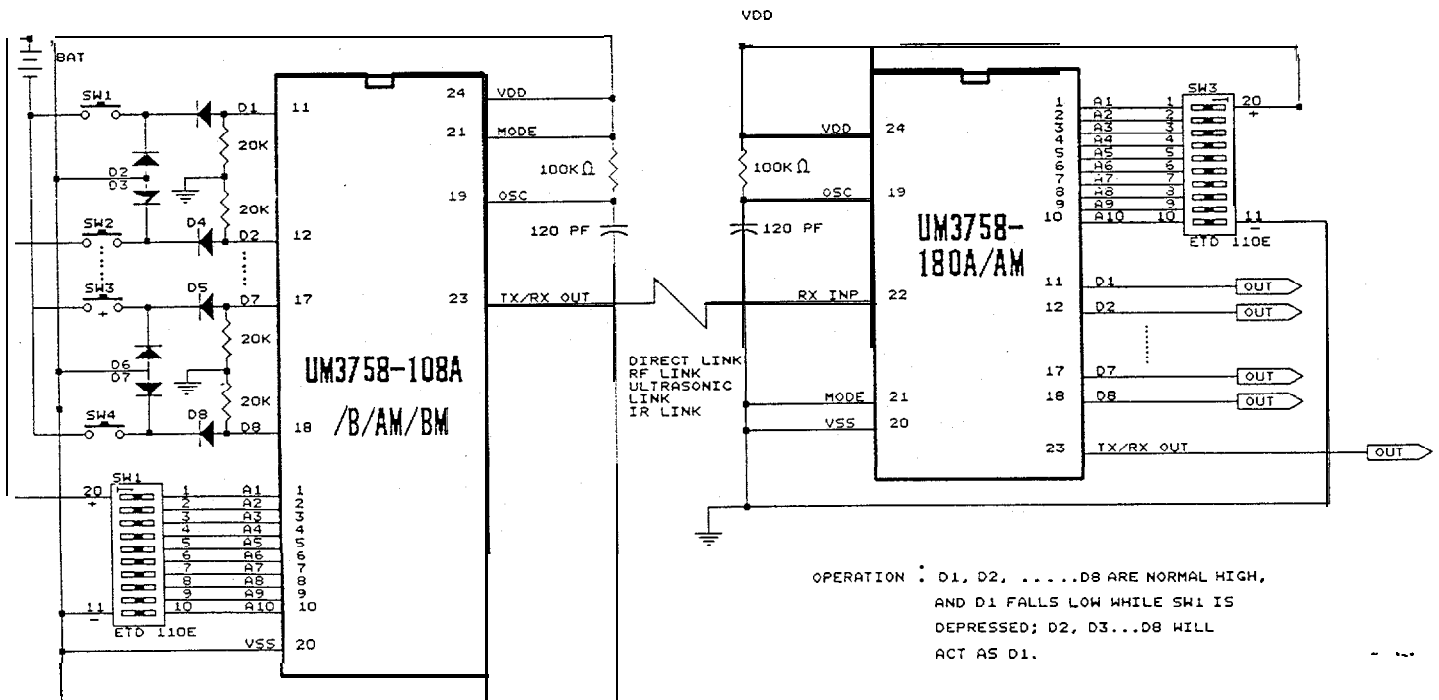


**Ordering Information**

| Part No.     | Addresses | Data | Data Output Type | Package Type |
|--------------|-----------|------|------------------|--------------|
| UM3758-180A  | 18        | 0    | —                | 24L DIP      |
| UM3758-180AM | 18        | 0    | —                | 24L SOP      |
| UM37581 08A  | 10        | 8    | LATCHED          | 24L DIP      |
| UM3758-108AM | 10        | 8    | LATCHED          | 24L SOP      |
| UM3758-108B  | 10        | 8    | MOMENTARY        | 24L DIP      |
| UM3758-108BM | 10        | 8    | MOMENTARY        | 24L SOP      |
| UM3758-120A  | 12        | 0    | —                | 18L DIP      |
| UM3758-120AM | 12        | 0    | —                | 20L SOP      |
| UM3758-084A  | 8         | 4    | LATCHED          | 18LDIP       |
| UM3758-084AM | 8         | 4    | LATCHED          | 20L SOP      |
| UM3758-084B  | 8         | 4    | MOMENTARY        | 18LDIP       |
| UM3758-084BM | 8         | 4    | MOMENTARY        | 20L SOP      |

**Package Information**
**DIP 24L Outline Dimensions**

unit : inch/mm

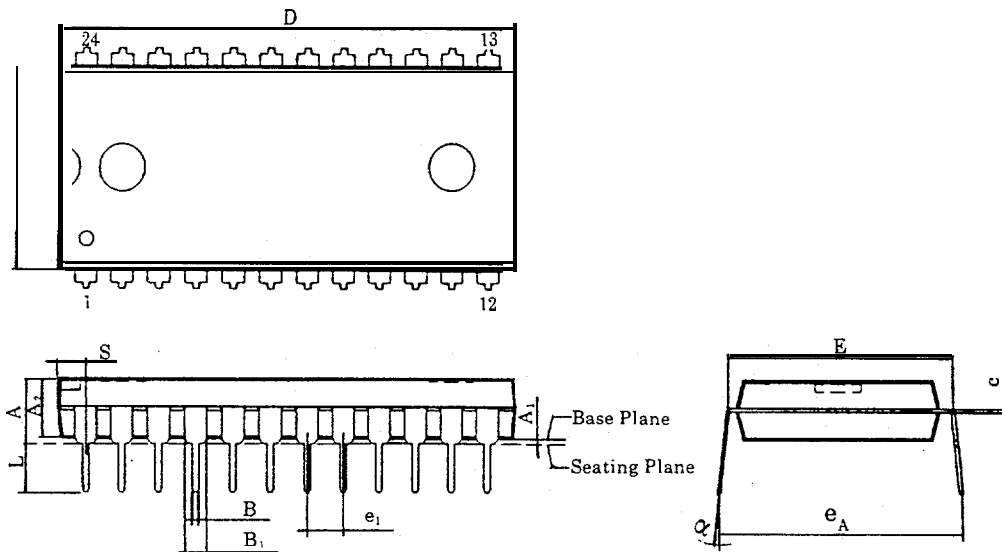


| Symbol         | Dimensions in inch                | Dimensions in mm               |
|----------------|-----------------------------------|--------------------------------|
| A              | 0.210 Max.                        | 5.33                           |
| A <sub>1</sub> | 0.010 Min.                        | 0.25 Min.                      |
| A <sub>2</sub> | 0.155 ± 0.010                     | 3.94 ± 0.25                    |
| B              | 0.018 <sup>+0.004</sup><br>-0.002 | 0.46 <sup>+0.10</sup><br>-0.05 |
| B <sub>1</sub> | 0.060 <sup>+0.004</sup><br>-0.002 | 1.52 <sup>+0.10</sup><br>-0.05 |
| c              | 0.010 <sup>+0.004</sup><br>-0.002 | 0.25 <sup>+0.10</sup><br>-0.05 |
| D              | 1 250TYP (1.270Max.)              | 31.75TYP (32.26Max.)           |
| E              | 0.600 ± 0.010                     | 15.24 ± 0.25                   |
| E <sub>1</sub> | 0.550TYP (0.562Max.)              | 13.97TYP (14.27Max.)           |
| e <sub>1</sub> | 0.100 ± 0.010                     | 2.54 ± 0.25                    |
| L              | 0.130 ± 0.010                     | 3.30 ± 0.25                    |
| α              | 0°~15°                            | 0°~15°                         |
| e <sub>A</sub> | 0.655~0.035                       | 16.64 ± 0.89                   |
| S              | 0.090 Max                         | 2.29 Max.                      |

**Note:**

1. The max value of dimension D includes end flash
2. The dimension E<sub>1</sub> doesn't include resin fins.
3. The dimension S includes end flash.
4. All dimensions are based on British system.

**Package Information**
**SOP 24L Outline Dimensions**

unit : inch/mm

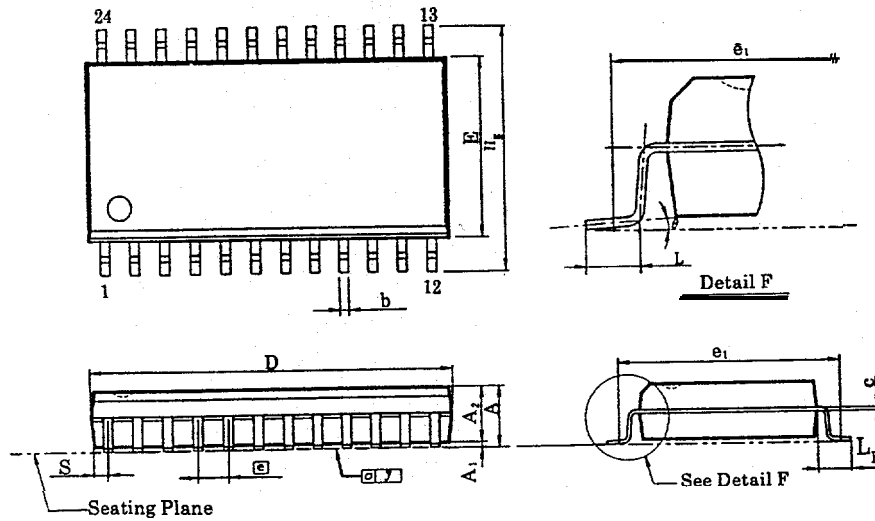


| Symbol         | Dimensions in inch                          | Dimensions in mm                         |
|----------------|---|--|
| A              | 0.110 Max.                                  | 2.79 Max.                                |
| A <sub>1</sub> | 0.004 Min.                                  | 0.10 Min.                                |
| A <sub>2</sub> | 0.091 ± 0.005                               | 2.31 ± 0.13                              |
| b              | 0.016 <sup>+0.004</sup> / <sub>-0.002</sub> | 0.41 <sup>+0.10</sup> / <sub>-0.05</sub> |
| c              | 0.006 <sup>+0.004</sup> / <sub>-0.002</sub> | 0.15 <sup>+0.10</sup> / <sub>-0.05</sub> |
| D              | 0.606TYP (0.620Max.)                        | 15.39TYP (15.75Max.)                     |
| F              | 0.295 ± 0.010                               | 7.49 ± 0.25                              |
| $e$            | 0.050 ± 0.006                               | 1.27 ± 0.15                              |
| $e_1$          | 0.370 NOM                                   | 9.40 NOM                                 |
| HE             | 0.406 ± 0.012                               | 10.31 ± 0.31                             |
| $t$            | 0.036 ± 0.008                               | 0.91 ± 0.20                              |
| L <sub>E</sub> | 0.055 ± 0.006                               | 1.40 ± 0.20                              |
| S              | 0.040 Max.                                  | 1.02 Max.                                |
| Y              | 0.006 Max.                                  | 0.15 Max.                                |
| $\theta$       | 0°~10°                                      | 0°~10°                                   |

**Note:**

1. The max value of dimension D includes end flash.
2. The dimension E doesn't include resin fins.
3. The dimension  $e_1$  is for PC Board surface mount pad pitch design reference only.
4. The dimension S includes end flash.
5. All dimensions are based on British system.

**Package Information**
**DIP 18L Outline Dimensions**

unit : inch/mm

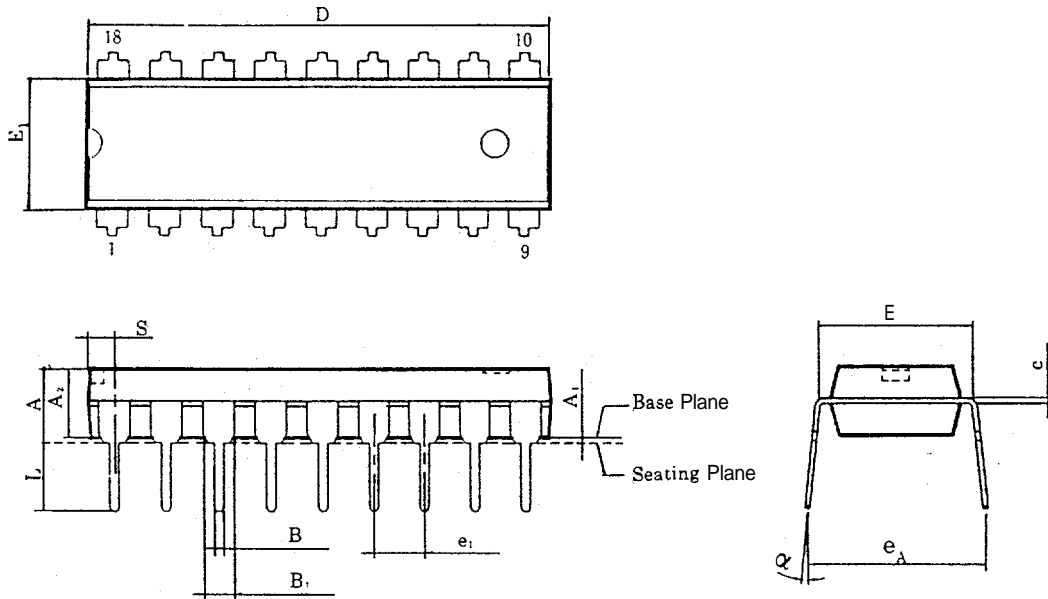

| Symbol         | Dimensions in inch  | Dimensions in mm                                  |
|----------------|---|---|
| A              | 0.175 Max.  | 4.45 Max.   |
| A <sub>1</sub> | 0.010 Min.  | 0.25 Min.   |
| A <sub>2</sub> | 0.130 ± 0.010   | 3.30 ± 0.25                                       |
| B              | 0.018 $\pm$ $\begin{matrix} 0.004 \\ -0.002 \end{matrix}$ | 0.46 $\begin{matrix} +0.10 \\ -0.05 \end{matrix}$ |
| B <sub>1</sub> | 0.060 $\begin{matrix} +0.004 \\ -0.002 \end{matrix}$      | 1.52 $\begin{matrix} +0.10 \\ -0.05 \end{matrix}$ |
| C              | 0.010 $\begin{matrix} +0.004 \\ -0.002 \end{matrix}$      | 0.25 $\begin{matrix} +0.10 \\ -0.05 \end{matrix}$ |
| D              | 0.900TYP (0.920Max.)                                      | 22.86TYP (23.37Max.)                              |
| E              | 0.300 ± 0.010   | 7.62 ± 0.25                                       |
| E <sub>1</sub> | 0.250TYP (0.262Max.)                                      | 6.35TYP (6.65Max.)                                |
| e <sub>1</sub> | 0.100 ± 0.010   | 2.54 ± 0.25                                       |
| L              | 0.130 ± 0.010   | 3.30 ± 0.25                                       |
| α              | 0°~15°  | 0°~15°  |
| e <sub>A</sub> | 0.345 ± 0.035   | 8.76 ± 0.89                                       |
| S              | 0.055 Max.  | 1.40 Max.   |


**Note:**

1. The max value of dimension D includes end flash.
2. The dimension E<sub>1</sub> doesn't include resin fins.
3. The dimension S includes end flash.
4. All dimensions are based on British system.



**Package Information**
**SOP 20L Outline Dimensions**

unit : inch/mm

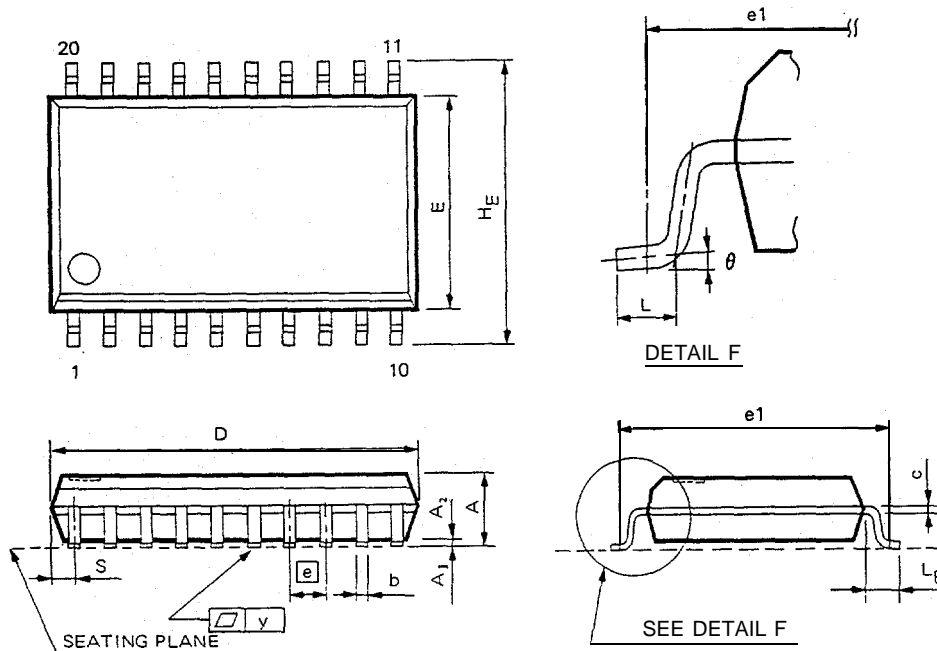

| Symbol         | Dimensions in inch                | Dimensions in mm               |
|----------------|-----------------------------------|--------------------------------|
| A              | 0.106 Max                         | 2.69 Max                       |
| A1             | 0.004 Min                         | 0.10 Min                       |
| A2             | 0.092 ± 0.005                     | 2.33 ± 0.13                    |
| b              | 0.016 <sup>+0.004</sup><br>-0.002 | 0.41 <sup>+0.10</sup><br>-0.05 |
| c              | 0.010 <sup>+0.004</sup><br>-0.002 | 0.25 <sup>+0.10</sup><br>-0.05 |
| D              | 0.504 TYP (0.524 Max)             | 12.80 TYP (13.31 Max)          |
| E              | 0.295 ± 0.010                     | 7.49 ± 0.25                    |
| e              | 0.050 ± 0.006                     | 1.27 ± 0.15                    |
| e <sup>1</sup> | 0.374 NOM                         | 9.50 NOM                       |
| H <sub>E</sub> | 0.406 ± 0.012                     | 10.31 ± 0.31                   |
| L              | 0.032 ± 0.008                     | 0.81 ± 0.20                    |
| L <sub>E</sub> | 0.055 ± 0.008                     | 1.40 ± 0.20                    |
| s              | 0.042 Max                         | 1.07 Max                       |
| v              | 0.006 Max.                        | 0.15 Max                       |
| θ              | 0° ~ 10°                          | 0° ~ 10°                       |

**Note:**

1. The max value of dimension D includes end flash.
2. The dimensions E doesn't include resin fins.
3. The dimension e<sup>1</sup> is for PC Board surface mount pad pitch design reference only.
4. The dimension S includes end flash
5. All dimensions are based on British system.



**Notice:** The information appearing in this publication is believed to be accurate. Integrated circuits sold by UMC are covered by the warranty and patent indemnification provisions stipulated in the terms of sale only. UMC makes no warranty, expressed, statutory, implied or by description regarding the information in this publication or regarding the freedom of the described chip from patent infringement. Furthermore, UMC makes no warranty of merchantability or fitness for any purpose. UMC reserves the right to halt production or alter specifications and prices at any time without notice. Accordingly, the reader is cautioned to verify that the data sheets and other information in this publication are current before placing orders.

**Products** described herein are intended for use in normal commercial applications. Applications which require extended temperature range, unusual environmental requirements, or high reliability applications, e.g. military, medical life-support or life sustaining equipment, are specifically not recommended without additional processing by UMC for such applications. Also, please note that Application Circuits in this document are for reference purposes only.

UMC has no sales or Service functions in the U.S.A. and therefore does not intend to sell its products in this market.