

NON-ISOLATED DC/DC CONVERTER

12 V Input 1.2 V-5.0 V/15 A Output

bel
POWER PRODUCTS

VRPF-15A1AC

RoHS Compliant

- Non-Isolated
- Fixed Frequency (220 kHz)
- Wide Output Voltage Trim
- Current Sink Capability for Termination Applications
- UL60950 Recognized (UL/cUL)
- Under-Voltage Lockout (UVLO)
- OCP/SCP
- Remote On/Off
- Power Good Output Signal (open collector)



Description

The Bel VRPF-15A1AC is part of the low cost non-isolated dc/dc converter. The module uses a SIP package for ease of layout and space savings. The output is closely regulated and can be trimmed from 1.2 V to 5.0 V. The efficiency is typically 92% at 5.0 V output at full load. Typical features include remote on/off, under-voltage lockout, over-current protection and short circuit protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number
1.2 V - 5.0 V	12 V	15 A	75 W	92%	VRPF-15A1AC

Note: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Ambient Temperature	0 °C	-	80 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	10.8 V	12 V	13.2 V	
Input Current (Source)				
Vo=5.0 V	-	6.9 A	-	
Vo=3.3 V	-	4.84 A	-	
Vo=2.5 V	-	3.65 A	-	
Vo=1.8 V	-	2.87 A	-	
Vo=1.5 V	-	2.50 A	-	
Vo=1.25 V	-	2.12 A	-	
Vo=1.2 V	-	2.02 A	-	
Input Current (Sink)				
Vo=5.0 V	-	-5.9 A	-	
Vo=3.3 V	-	-3.8 A	-	
Vo=2.5 V	-	-2.7 A	-	
Vo=1.8 V	-	-1.9 A	-	
Vo=1.5 V	-	-1.6 A	-	
Vo=1.25 V	-	-1.3 A	-	
Vo=1.2 V	-	-1.1 A	-	

NON-ISOLATED DC/DC CONVERTER

12 V Input 1.2 V-5.0 V/15 A Output



Input Specifications (continued)

Parameter	Min	Typ	Max	Notes
Remote Off Input Current	-	25 mA	30 mA	
Input Reflected Ripple Current (pk-pk)	-	-	330 mA	Tested with simulated source impedance of 500 nH 5 Hz to 20 MHz, and 5 × 10 uF/16 V ceramic capacitors at the input
Input Reflected Ripple Current (rms)	-	-	120 mA	
I ² t Inrush Current Transient	-	0.05 A ² s	0.1 A ² s	
Turn-on Voltage Threshold	-	9.8 V	10.4 V	
Turn-off Voltage Threshold	-	9.4 V	10.3 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point				Test condition: Vin=12 V, Iout=half load
Vo=5.0 V	4.900 V	5.0 V	5.100 V	
Vo=3.3 V	3.234 V	3.3 V	3.366 V	
Vo=2.5 V	2.450 V	2.5 V	2.550 V	
Vo=1.8 V	1.764 V	1.8 V	1.836 V	
Vo=1.5 V	1.470 V	1.5 V	1.530 V	
Vo=1.25 V	1.225 V	1.25 V	1.275 V	
Vo=1.2 V	1.176 V	1.2 V	1.224 V	
Load Regulation				
Vo=5.0 V	-	10 mV	25.0 mV	
Vo=3.3 V	-	8 mV	16.5 mV	
Vo=2.5 V	-	5 mV	12.5 mV	
Vo=1.8 V	-	4 mV	9.0 mV	
Vo=1.5 V	-	3 mV	7.5 mV	
Vo=1.25 V	-	3 mV	6.3 mV	
Vo=1.2 V	-	2.5 mV	6.0 mV	
Line Regulation				
Vo=5.0 V	-	5.0 mV	10.0 mV	
Vo=3.3 V	-	3.3 mV	6.6 mV	
Vo=2.5 V	-	2.5 mV	5.0 mV	
Vo=1.8 V	-	1.8 mV	3.6 mV	
Vo=1.5 V	-	1.5 mV	3.0 mV	
Vo=1.25 V	-	1.25 mV	2.5 mV	
Vo=1.2 V	-	1.2 mV	2.4 mV	
Regulation Over Temperature (0 °C to +80 °C)				
Vo=5.0 V	-	10 mV	20 mV	
Vo=3.3 V	-	9 mV	18 mV	
Vo=2.5 V	-	8 mV	15 mV	
Vo=1.8 V	-	7 mV	14 mV	
Vo=1.5 V	-	6 mV	13 mV	
Vo=1.25 V	-	5 mV	12 mV	
Vo=1.2 V	-	4 mV	12 mV	
Output Ripple and Noise (pk-pk)				Tested at 0-20 MHz BW, with 5×10 uF/16 V ceramic capacitors at the input, and 5×10 uF/10 V ceramic capacitors and a 1000 uF electrolytic capacitor at the output.
Vo=5.0 V	-	60 mV	75 mV	
Vo=3.3 V	-	50 mV	65 mV	
Vo=2.5 V	-	40 mV	60 mV	
Vo=1.8 V	-	35 mV	50 mV	
Vo=1.5 V	-	35 mV	50 mV	
Vo=1.25 V	-	30 mV	50 mV	
Vo=1.2 V	-	30 mV	50 mV	

NON-ISOLATED DC/DC CONVERTER

12 V Input 1.2 V-5.0 V/15 A Output



Output Specifications (continued)

Parameter	Min	Typ	Max	Notes	
Output Ripple and Noise (rms)				Tested at 0-20 MHz BW, with 5×10 uF/16 V ceramic capacitors at the input, and 5×10 uF/10 V ceramic capacitors and a 1000 uF/16 V electrolytic capacitor at the output.	
Vo=5.0 V	-	18 mV	30 mV		
Vo=3.3 V	-	15 mV	25 mV		
Vo=2.5 V	-	12 mV	20 mV		
Vo=1.8 V	-	12 mV	20 mV		
Vo=1.5 V	-	10 mV	15 mV		
Vo=1.2 V	-	10 mV	15 mV		
Output Current	0 A	-	15 A		
Current Limit Threshold	19.5 A	-	37.5 A		
Short Circuit Surge Transient					
Vo=5.0 V	-	0.1 A ² s	0.3 A ² s		
Vo=3.3 V	-	0.1 A ² s	0.3 A ² s		
Vo=2.5 V	-	0.1 A ² s	0.3 A ² s		
Vo=1.8 V	-	0.3 A ² s	0.6 A ² s		
Vo=1.5 V	-	0.4 A ² s	0.8 A ² s		
Vo=1.25 V	-	0.4 A ² s	0.8 A ² s		
Vo=1.2 V	-	0.4 A ² s	0.8 A ² s		
Turn on Time	-	20 mS	100 mS		
Overshoot at Turn on	-	0%	3%		
Output Capacitance					
Vo=5.0 V	1050 uF	-	5080 uF		
Vo=3.3 V	1050 uF	-	6000 uF		
Vo=2.5 V	1050 uF	-	7840 uF		
Vo=1.8 V	1050 uF	-	8500 uF		
Vo=1.5 V	1050 uF	-	9000 uF		
Vo=1.25 V	1050 uF	-	9500 uF		
Vo=1.2 V	1050 uF	-	9680 uF		
Transient Response					
50% ~ 75% Max Load	Vo=5.0 V	-	100 mV	200 mV	Test conditions: di/dt = 0.1 A/uS; Vin = 12 V; with 5×10 uF ceramic capacitors and a 1000 uF/16 V electrolytic at the output
Settling Time		-	100 uS	200 uS	
75% ~ 50% Max Load		-	100 mV	200 mV	
Settling Time		-	100 uS	200 uS	
50% ~ 75% Max Load	Vo=3.3 V	-	80 mV	165 mV	
Settling Time		-	100 uS	200 uS	
75% ~ 50% Max Load		-	80 mV	165 mV	
Settling Time		-	100 uS	200 uS	
50% ~ 75% Max Load	Vo=1.25 V - 2.5 V	-	60 mV	125 mV	
Settling Time		-	100 uS	200 uS	
75% ~ 50% Max Load		-	60 mV	125 mV	
Settling Time		-	100 uS	200 uS	
50% ~ 75% Max Load	Vo=1.2 V	-	60 mV	120 mV	
Settling Time		-	100 uS	200 uS	
75% ~ 50% Max Load		-	60 mV	120 mV	
Settling Time		-	100 uS	200 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTER

12 V Input 1.2 V-5.0 V/15 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency (Current Source)				Measured at $V_{in}=12\text{ V}$, full load.
Vo=5.0 V	90%	92%	-	
Vo=3.3 V	87%	89%	-	
Vo=2.5 V	84%	87%	-	
Vo=1.8 V	80%	82%	-	
Vo=1.5 V	78%	80%	-	
Vo=1.25 V	76%	79%	-	
Vo=1.2 V	76%	79%	-	
Efficiency (Current Sink)				
Vo=5.0 V	88%	91%	-	
Vo=3.3 V	84%	87%	-	
Vo=2.5 V	81%	84%	-	
Vo=1.8 V	77%	80%	-	
Vo=1.5 V	73%	76%	-	
Vo=1.25 V	68%	71%	-	
Vo=1.2 V	68%	71%	-	
Switching Frequency	200 kHz	220 kHz	240 kHz	
Output Voltage Trim Range	1.2 V	-	5.0 V	Vo=1.2 V when the Trim pin is open.
MTBF	3,664,032 hours			Calculated Per Bell Core SR-332 ($I_o = 12\text{ A}$, $V_{in}=12\text{ V}$; $T_a = 25\text{ }^\circ\text{C}$)
Dimensions				
Inches (L x W x H)	1.2 x 1.0 x 0.457			
Millimeters (L x W x H)	30.48 x 25.4 x 11.6			
Weight	-	14.2 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	0 V	-	1 V	Remote On/Off pin open, the module is ON.
Signal High (Unit On)	2.4 V	-	13.2 V	
Power Good				
Power Good Delay ¹	-	-	10 mS	
Signal Low ²	-	0.3 V	-	
Current Sink	-	5 mA	-	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. Power good delay time is the time from output voltage in full regulation to power good asserted.
2. The power good signal is an open collector output. When the output of the module reaches 90% of the nominal set point, the power good pin is set high.

NON-ISOLATED DC/DC CONVERTER


12 V Input 1.2 V-5.0 V/15 A Output



Output Trim Equation

Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) is shown below. The R_{set} resistor should be connected between the Trim pin and GND.

$$V_{adj} = \left(\frac{0.992}{5.62K} + \frac{0.992}{R_{set}} \right) \cdot 1.18K + 0.992$$

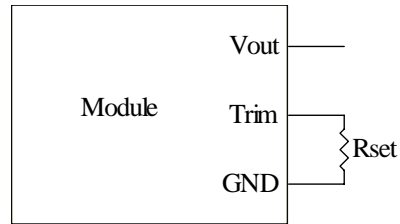

Where, V_{adj} is the required voltage setpoint, R_{set} is the resistance required between TRIM and GND.

Power Good Signal Level Set

Equation for calculating the power good threshold (in kΩ) given the desired adjusted voltage (V_{adj}) is shown below. The PWRGD_SET resistor should be connected between the PWRGD_SET pin (Pin 9) and GND.

Output Voltage	PWRGD_THRESHOLD Set Resistor (1%tol)
5V	Short (Zero Ohm)
3.3V	1.78k
2.5V	4.22k
1.8V	11.8k
1.5V	26.1k
1.25V	169k
1.2V	Open (no resistor)

$$PWRGD_THRESHOLD = 6.19K \left(\frac{1.24}{2.21K + R_{set}} - 18.86 \cdot 10^{-6} \right) + 1.24$$


Where, R_{set} is the resistance required between PWRGD_SET and GND.

NON-ISOLATED DC/DC CONVERTER


12 V Input 1.2 V-5.0 V/15 A Output




Efficiency Data

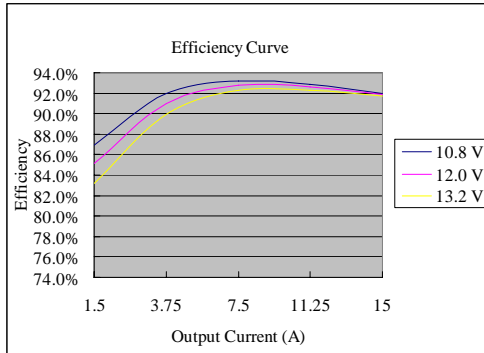


Vo=5.0 V

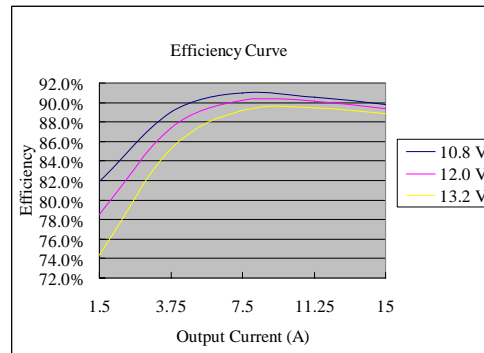


Vo=3.3 V

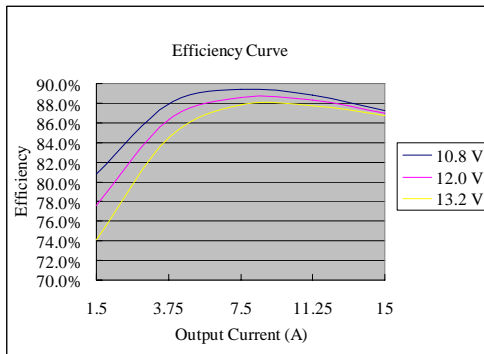


Vo=2.5 V

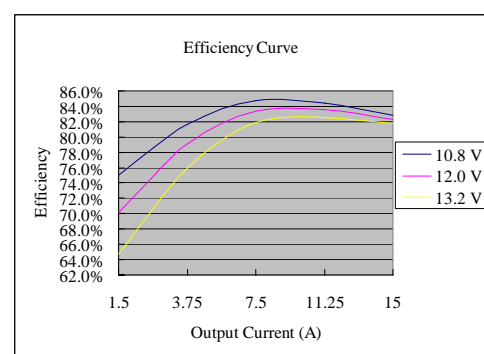


Vo=1.8 V

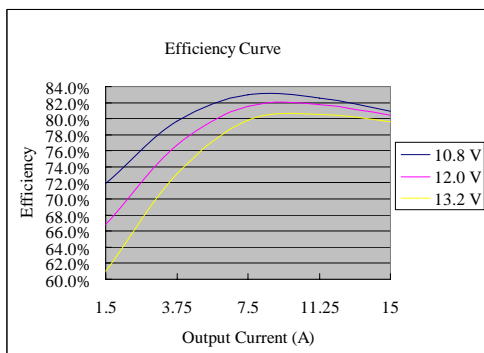

Vo=1.5 V

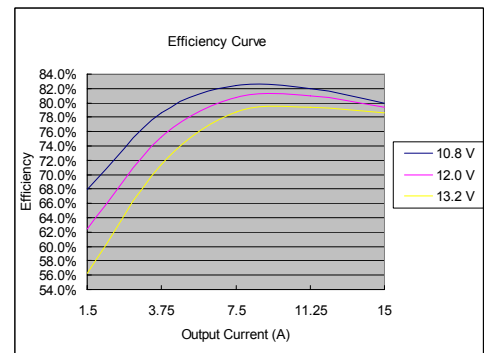

Vo=1.25 V

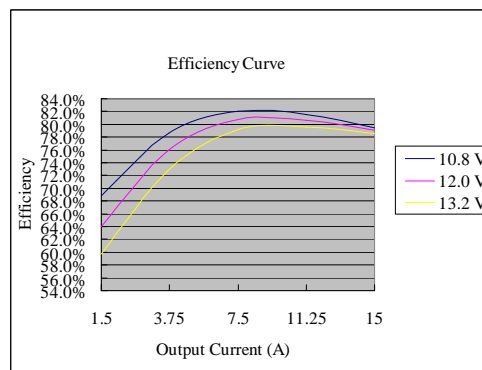


Vo=1.2 V

NON-ISOLATED DC/DC CONVERTER


12 V Input 1.2 V-5.0 V/15 A Output




Thermal Derating Curves

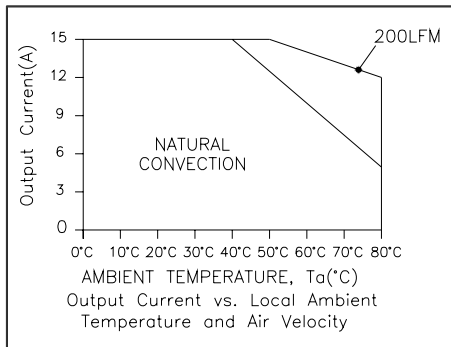


$V_o = 5.0 \text{ V}$

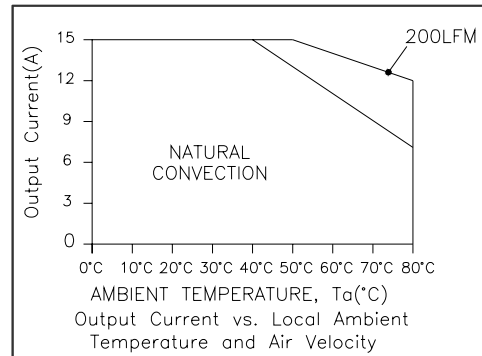


$V_o = 3.3 \text{ V}$

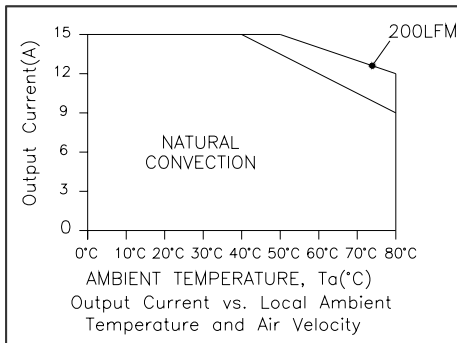


$V_o = 2.5 \text{ V}$

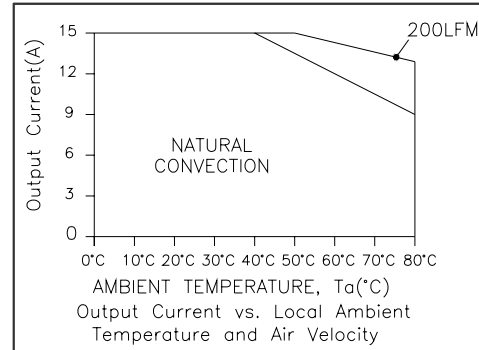


$V_o = 1.8 \text{ V}$

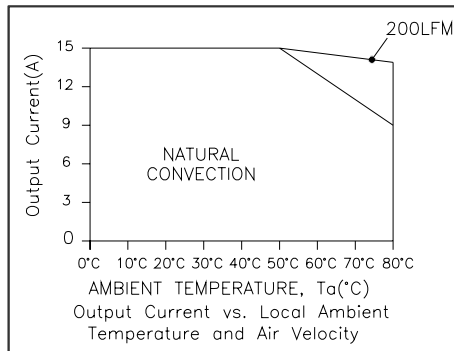

$V_o = 1.5 \text{ V}$

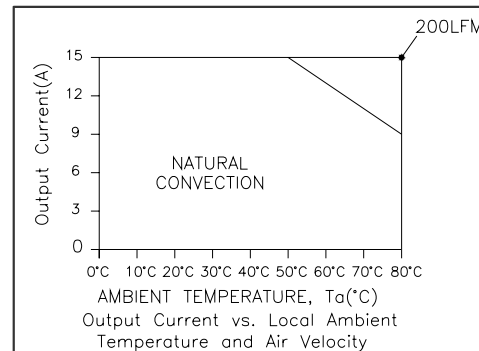

$V_o = 1.25 \text{ V}$

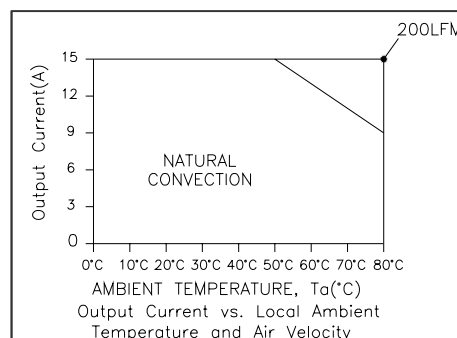

$V_o = 1.2 \text{ V}$



Test Condition: The module is mounted on 2 OZ two-layer FR4 board.

NON-ISOLATED DC/DC CONVERTER

12 V Input 1.2 V-5.0 V/15 A Output




Mechanical Outline

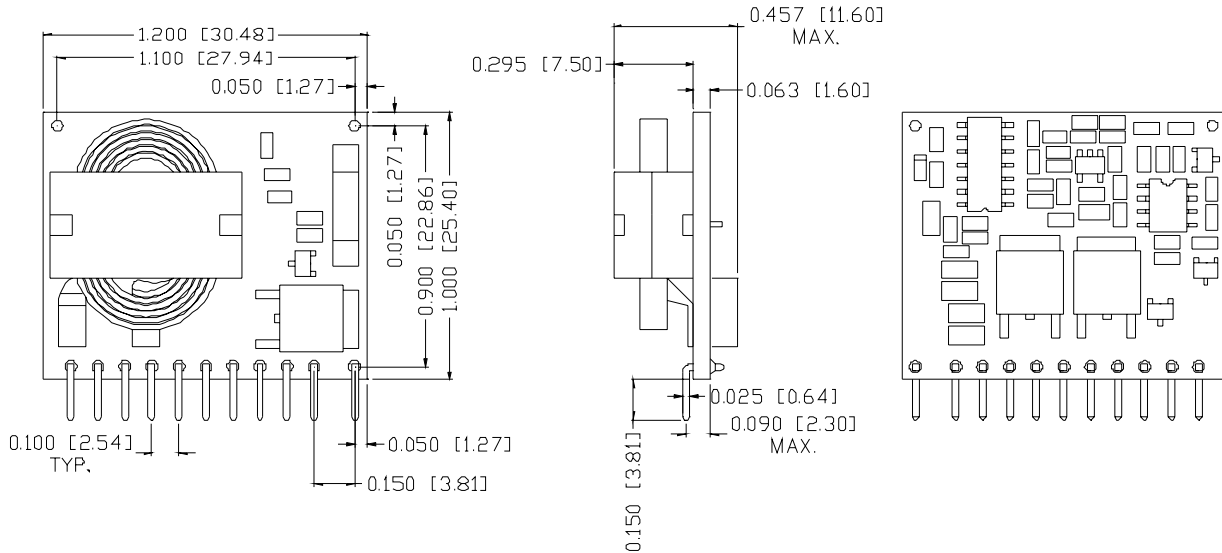

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	Trim
5	Output Enable
6	Power Good
7	Ground
8	Ground
9	PWRGD_SET
10	Vin
11	Vin

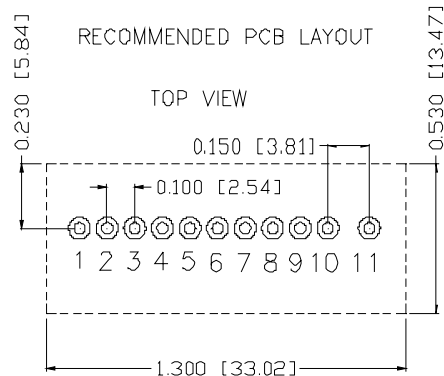

HOLE SIZE: $\varnothing 0.040 \pm 0.003$ [1.02 \pm 0.08]
PAD SIZE: $\varnothing 0.079 \pm 0.002$ [2.00 \pm 0.05]

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2005 Bel Fuse Inc. Specifications subject to change without notice. 122805

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com