

## Description

The LM358 contains two independent high gain operational amplifiers with internal compensation. The two op-amps operate over a wide voltage range from a single power supply. Also use a split power supply. The device has low power supply voltage. The low power drain also makes the LM358 a good choice for battery operation.

When your project calls for a traditional op-amp function, now you can streamline your design with a simple any digital system or personal computer application, without requiring an extra 15V power supply just to have the interface electronics you need.


The LM358 is a versatile, rugged workhorse with a thousand-and-one use, from amplifying signals from a variety of transducers to dcgain blocks,, or any op-amp function. The attached pages offer some recipes rhat will have your project cooking in no time.

## Features

- Internally frequency compensated for unity gain
- Large DC voltage gain: 100dB Wide power supply range:  
3V ~ 32 V (or  $\pm 1.5V \sim \pm 16V$ )
- Input common-mode voltage range includes ground
- Large output voltage swing: 0V DC to  $V_{cc}$ -1.5V DC
- Power drain suitable for battery operation
- Differential input voltage range equal to the power supply
- Low input offset voltage and offset current



SOP - 8




DIP - 8

## Package


## Internal Block Diagram

**Logic Diagram**

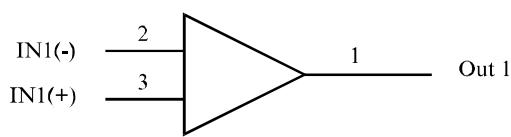

**Pin Assignment**

OUT 1	1	●	8	$V_{CC}$
IN1(-)	2		7	OUT 2
IN1(+)	3		6	IN2(-)
GND	4		5	IN2(+)

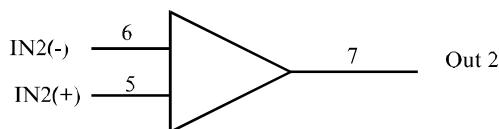

PIN 4 = GND  
PIN 8=V<sub>cc</sub>

## Electrical Characteristics

at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)

Symbol	Parameter	Test conditions*	LM358			Units	
			Min	Typ	Max		
$V_{IO}$	Input offset voltage	$V_{CC} = 5\text{ V}$ to MAX, $V_{IC} = V_{ICR}$ min, $V_o = 1.4\text{ V}$	25 °C		3	7	
			Full range		9	mV	
$\alpha V_{IO}$	Average temperature coefficient of input offset voltage		Full range		7	$\mu\text{V}/^\circ\text{C}$	
$I_{IO}$	Input offset current	$V_o = 1.4\text{ V}$	25 °C		2	50	
			Full range		150		
$\alpha I_{IO}$	Average temperature coefficient of input offset current		Full range		10	$\text{pA}/^\circ\text{C}$	
$I_{IB}$	Input bias current	$V_o = 1.4\text{ V}$	25 °C		-20	-250	
			Full range		-500	nA	
$V_{ICR}$	Common-mode input voltage range	$V_{CC} = 5\text{ V}$ to MAX	25 °C	0 to $V_{CC} - 1.5$		V	
			Full range	0 to $V_{CC} - 2$			
$V_{OH}$	High-level output voltage	$R_L \geq 2\text{ k}\Omega$	25 °C	$V_{CC} - 1.5$		V	
		$V_{CC} = \text{MAX}$ , $R_L = 2\text{ k}\Omega$	Full range	26			
		$V_{CC} = \text{MAX}$ , $R_L \geq 10\text{ k}\Omega$	Full range	27	28		
	$V_{OL}$ Low-level output voltage	$R_L \geq 10\text{ k}\Omega$	Full range		5	20	mV
$A_{VD}$	Large-signal differential voltage amplification	$V_{CC} = 15\text{ V}$ , $V_o = 1\text{ V}$ to $11\text{ V}$ , $R_L \geq 2\text{ k}\Omega$	25 °C	25	100		$\text{V}/\text{mV}$
			Full range	15			
$CMRR$	Common-mode rejection ratio	$V_{CC} = 5\text{ V}$ to MAX, $V_{IC} = V_{ICR}$ min	25 °C	65	80		dB
$k_{SVR}$	Supply voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ )	$V_{CC} = 5\text{ V}$ to MAX	25 °C	65	100		dB
$V_{O1}/V_{O2}$	Crosstalk attenuation	$f = 1\text{ kHz}$ to $20\text{ kHz}$	25 °C		120		dB
$I_O$	Output current	$V_{CC} = 15\text{ V}$ , $V_{ID} = 1\text{ V}$ , $V_o = 0$	25 °C	-20	-30		mA
			Full range	-10			
		$V_{CC} = 15\text{ V}$ , $V_{ID} = -1\text{ V}$ , $V_o = 15\text{ V}$	25 °C	10	20		
			Full range	5			
$I_{OS}$	Short-circuit output current	$V_{CC} = 5\text{ V}$ , GND at -5 V, $V_o = 0$	25 °C		$\pm 40$	$\pm 60$	mA
$I_{CC}$	Supply current (two amplifiers)	$V_o = -2.5\text{ V}$ , No load	Full range		0.7	1.2	mA
		$V_{CC} = \text{MAX}$ , $V_o = 0.5V_{CC}$ , No load	Full range		1	2	

- All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. "MAX"  $V_{CC}$  for testing purposes is 30 V. Full range is 0 °C to 70 °C.

## Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	Power Supply Voltages Single Supply Split Supplies	32 ±16	V
V <sub>IDR</sub>	Input Differential Voltage Range (1)	±32	V
V <sub>ICR</sub>	Input Common Mode Voltage Range	-0.3 to 32	V
t <sub>S</sub>	Short-Circuit duration of Output	100	ms
I <sub>IN</sub>	Input Current, per pin (2)	50	mA
T <sub>J</sub>	Junction Temperature Plastic Packages	150	°C
T <sub>STG</sub>	Storage Temperature (T <sub>A</sub> = +25°C) Plastic Packages	-55 to +125	°C
T <sub>L</sub>	Lead Temperature, 1mm from Case for 10 Seconds	260	°C

Maximum Ratings are those values beyond which damage to the device may occur.

Functional operation should be restricted to the Recommended Operating Conditions.

Notes:

1. Split Power Supplies.
2. V<sub>IN</sub> < -0.3V. This input current will only exist when voltage at any of the input leads is driven negative.

## Typcal Performance Characteristics

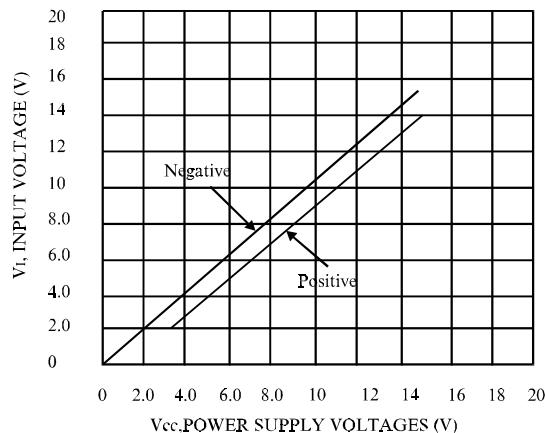


Figure 1. Input Voltage Range



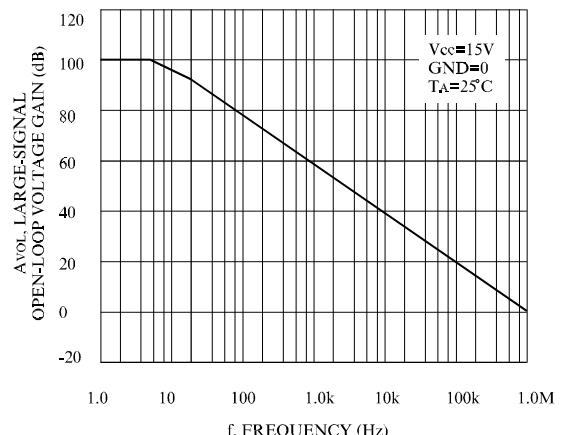



Figure 2. Open-Loop Frequency

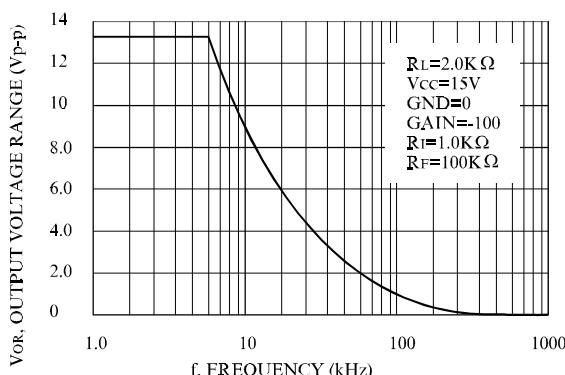


**Figure 3. Large-Signal Frequency Response**

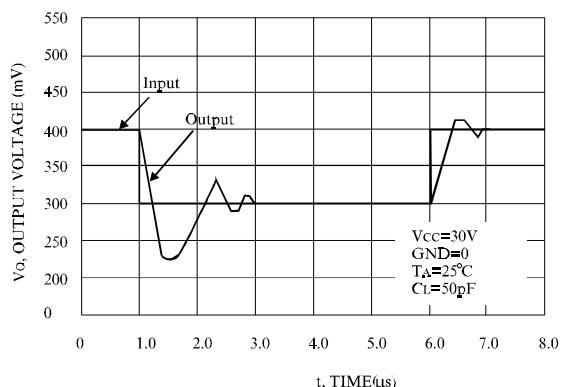

**Figure 4. Small-Signal Voltage Follower Pulse Response (Noninverting)**

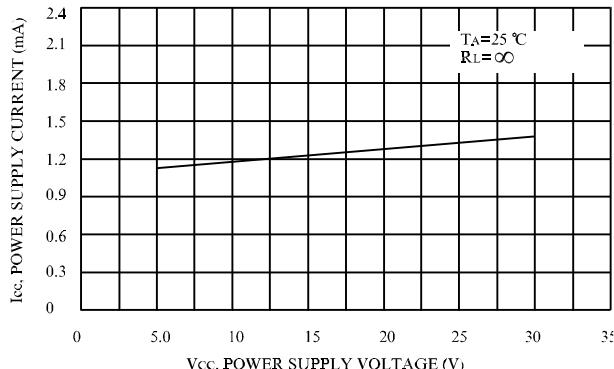

**Figure 5. Power Supply Current versus Power Supply Voltage**

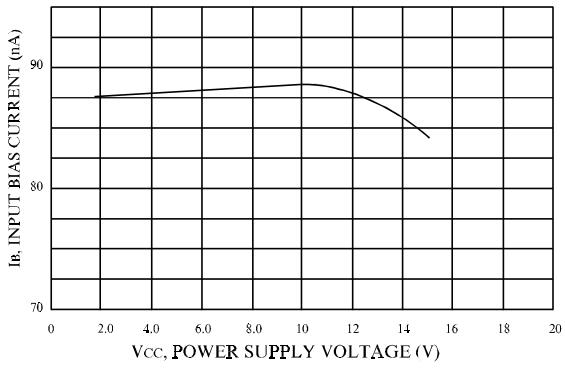

**Figure 6. Input Bias Current versus Power Supply Voltage**

## Ordering Information

ORDERING NUMB	PACKAGE	MARKING
LM358	DIP - 8 / SOP - 8	LM358

Address : 北京市海淀区永定路 88 号长银大厦 6A06--6A07

Rm 6A07, Changyin Office Building ,No.88, Yong Ding Road, Hai Dian District ,Beijing

Postalcode:100039

Tel: 86-010-58895780 / 81 / 82 / 83 / 84      Fax : 010-58895793

[Http://www.estek.com.cn](http://www.estek.com.cn)

Email:sales@estek.com.cn

REV No:01-060819