


mm inch

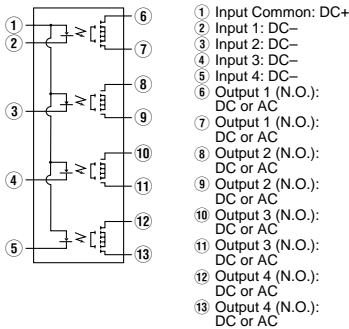

### FEATURES

- 4-circuit (4-Form A) of GU PhotoMOS Relay** in a compact and slim 13 pin SIL
- Applicable for 4 Form A use, as well as 4 independent 1 Form A**
- Controls low-level analog signals**  
PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- Low-level off state leakage current (Typical 100 pA at 100 V load voltage)**
- Optical coupling for extremely high isolation**
- Eliminates the need for a counter electromotive protection diode in the drive circuit on the input side**

- PC board layout is simplified**
- Eliminates the need for a separate power supply to drive the power MOS-FET**
- Low thermal electromotive force (Approx. 1  $\mu$ V)**
- No restriction on mounting direction**
- No arc, no bounce, no noise**

### TYPICAL APPLICATIONS

- Telecommunication equipment
- High speed inspection machine, Scanner, IC checker
- Robots

### TYPES

|            | Output rating* |              | Part No. | Packing quantity |              |
|------------|----------------|--------------|----------|------------------|--------------|
|            | Load voltage   | Load current |          | Inner case       | Outer carton |
| AC/DC type | 400 V          | 80 mA        | AQX21444 | 20 pcs.          | 200 pcs.     |

\*Indicate the peak AC and DC values.

### RATINGS

#### 1. AC/DC type

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

|                         | Item                    | Symbol     | AQX21444                        | Remarks   |
|-------------------------|-------------------------|------------|---------------------------------|---|
| Input                   | LED forward current     | $I_F$      | 50 mA                           |   |
|                         | LED reverse voltage     | $V_R$      | 3 V                             |   |
|                         | Peak forward current    | $I_{FP}$   | 1 A                             | $f = 100$ Hz, Duty factor = 0.1%                    |
|                         | Power dissipation       | $P_{in}$   | 75 mW                           |   |
| Output                  | Load voltage (peak AC)  | $V_L$      | 400 V                           |   |
|                         | Continuous load current | $I_L$      | 80 mA (100 mA)                  | ( ): in case of using only 1 channel<br>Peak AC, DC |
|                         | Peak load current       | $I_{peak}$ | 0.3 A                           | 100 ms (1 shot), $V_L = DC$                         |
|                         | Power dissipation       | $P_{out}$  | 1,450 mW                        |   |
| Total power dissipation |                         | $P_T$      | 1,500 mW                        |   |
| I/O isolation voltage   |                         | $V_{iso}$  | 1,500 V AC                      |   |
| Temperature limits      | Operating               | $T_{opr}$  | -40°C to +85°C -40°F to +185°F  | Non-condensing at low temperatures                  |
|                         | Storage                 | $T_{stg}$  | -40°C to +100°C -40°F to +212°F |   |


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                                  | Symbol                                    | AQX21444                            | Condition   |   |
|--------------------------|----------------------------------|---|-------------------------------------|---|---|
| Input                    | LED operate current              | Typical                                   | 1.1 mA                              | I <sub>L</sub> = 80 mA  |   |
|                          |                                  | Maximum                                   | 3 mA                                |   |   |
|                          | LED turn off current             | Minimum                                   | 0.4 mA                              | I <sub>L</sub> = 80 mA  |   |
|                          |                                  | Typical                                   | 1.0 mA                              |   |   |
| LED dropout voltage      | Typical                          | 1.14 V (1.25 V at I <sub>F</sub> = 50 mA) |                                     | I <sub>F</sub> = 5 mA   |   |
|                          | Maximum                          | 1.5 V                                     |                                     |   |   |
| Output                   | On resistance                    | Typical                                   | 30 Ω                                | I <sub>F</sub> = 5 mA<br>I <sub>L</sub> = 80 mA<br>Within 1 s on time |   |
|                          |                                  | Maximum                                   | 50 Ω                                |   |   |
|                          | Off state leakage current        | Maximum                                   | I <sub>Leak</sub>                   | 1 μA  | I <sub>F</sub> = 0 mA<br>V <sub>L</sub> = 400 V |
| Transfer characteristics | Switching speed                  | Turn on time*                             | Typical                             | 0.52 ms   | I <sub>F</sub> = 5 mA                           |
|                          |                                  |   | Maximum                             | 2 ms  | I <sub>L</sub> = 80 mA                          |
|                          |                                  | Turn off time*                            | Typical                             | 0.29 ms   | I <sub>F</sub> = 10 mA                          |
|                          |                                  |   | Maximum                             | 1 ms  | I <sub>L</sub> = 80 mA                          |
|                          | I/O capacitance                  | Typical                                   | C <sub>iso</sub>                    | 4.0 pF  | f = 1 MHz                                       |
|                          |                                  | Maximum                                   |                                     | 8.0 pF  | V <sub>B</sub> = 0                              |
|                          | Initial I/O isolation resistance | Minimum                                   | R <sub>iso</sub>                    | 1,000 MΩ  | 500 V DC  |
|                          | Vibration resistance             | Minimum                                   | —                                   | 10 to 55 Hz at double amplitude of 3 mm                               | 2 hours for 3 axes                              |
| Shock resistance         | Minimum                          | —   | 4,900 m/s <sup>2</sup> {500 G} 1 ms | 3 times for 3 axes  |   |

Note: Recommendable LED forward current I<sub>F</sub> = 5 mA.

For type of connection, see page 34.

\*Turn on/Turn off time

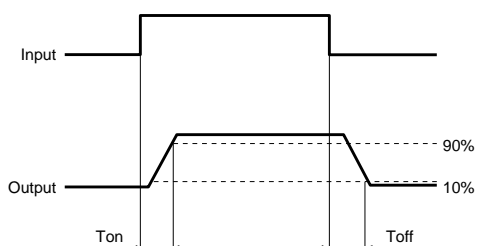


- For Dimensions, see Page 29.
- For Schematic and Wiring Diagrams, see Page 34.
- For Cautions for Use, see Page 36.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

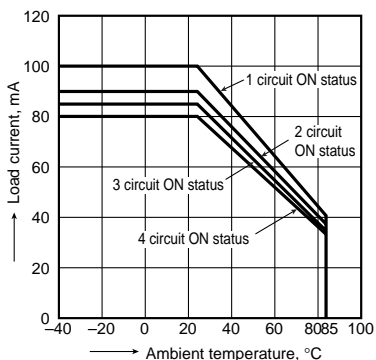


2. Load current in adjacent mounting vs. ambient temperature

Condition: 4 circuits ON status

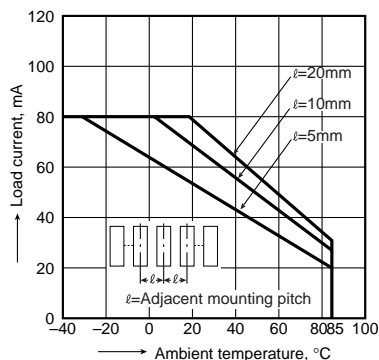

3. On resistance vs. ambient temperature characteristics


Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; LED current: 5 mA; Continuous load current: 80 mA (DC)

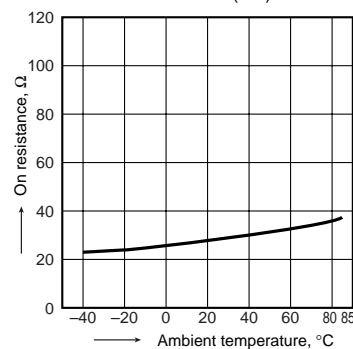

# AQX21444


## 4. Turn on time vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 80 mA (DC)




## 5. Turn off time vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 80 mA (DC)

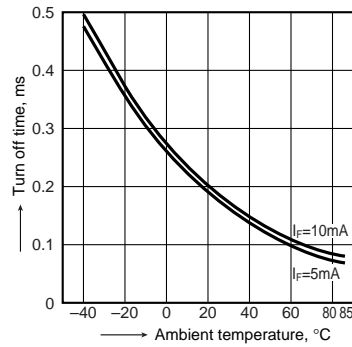


## 6. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 80 mA (DC)

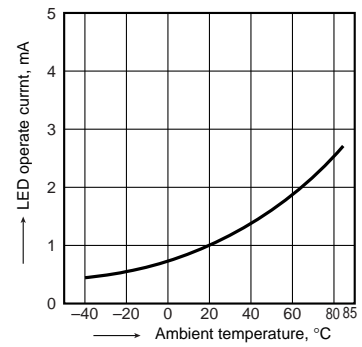


## 7. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 80 mA (DC)




## 8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

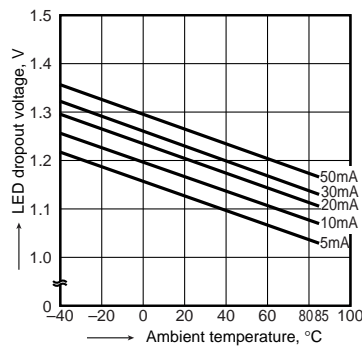


## 9. Voltage vs. current characteristics of output at MOS portion

Measured portion: between 6 and 7, 8 and 9, 10 and 11, 12 and 13; Ambient temperature: 25°C 77°F




## 10. Off state leakage current

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13;  
Ambient temperature: 25°C 77°F

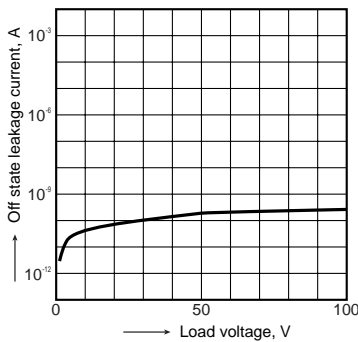


## 11. LED forward current vs. turn on time characteristics

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; Load voltage: 400 V (DC);  
Continuous load current: 80 mA (DC);  
Ambient temperature: 25°C 77°F



## 12. LED forward current vs. turn off time characteristics

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; Load voltage: 400 V (DC);  
Continuous load current: 80 mA (DC);  
Ambient temperature: 25°C 77°F

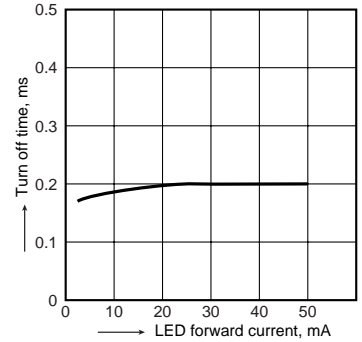

## 13. Applied voltage vs. output capacitance characteristics (AC/DC type)

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; Load voltage: 400 V (DC);  
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

