


SML150MAT12

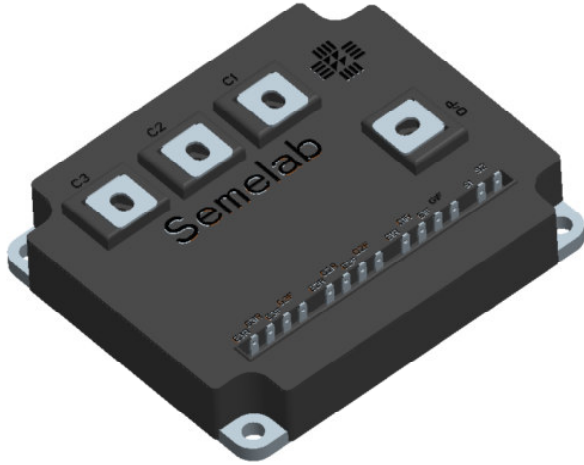

FEATURES

- HIGH RELIABILITY PLASTIC HYBRID MODULE
- SUITABLE FOR MATRIX CONVERTER APPLICATIONS
- POSITIVE TEMPERATURE COEFFICIENT OF V_{CEsat}
- VERY LOW C_{ies} , C_{oes} , C_{res}

Maximum Rated Values (At 25°C unless otherwise stated)

Symbol	Name	Conditions	Value	Unit
V_{CES}	Collector Emitter Voltage		1200	V
V_{GES}	Gate Emitter Voltage		±20	V
I_C	DC-Collector Current	$T_C = 25^\circ\text{C}$	200	A
		$T_C = 65^\circ\text{C}$	100	A
I_{CM}	Repetitive Peak Collector Current	$T_C = 25^\circ\text{C}; t_p = 1\text{ms}$	300	A
P_{TOT}	Power Dissipation	Per IGBT, $T_{CASE} = 25^\circ\text{C}$	1300	W
T_J	Operating Temperature		-55...+125	°C
T_{ST}	Storage Temperature		-55...+150	°C

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Document No :
Issue : ENG/06

SML150MAT12

IGBT Characteristic Values

Symbol	Name	Conditions	min.	typ.	max.	Unit
$V_{(BR)CES}$	Collector Emitter Breakdown Voltage	$V_{GE} = 0V, I_C = 4mA$	1200	-	-	V
$V_{GE(th)}$	Gate Threshold Voltage		5.0	5.8	6.5	V
I_{CES}	Collector-Emitter Cut-Off Current		-	-	5000	μA
I_{GES}	Gate-Emitter Leakage Current		-	-	400	nA
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE} = 15V, I_C = 150A$	-	1.75	2.15	V
C_{ies}	Input Capacitance	$V_{GE} = 0V$	-	10.5	-	μF
C_{res}	Reverse Transfer Capacitance	$V_{CE} = 25V$	-	0.4	-	nF
L_{CE}	Stray Inductance (module)	$f = 1MHz, T_J = 125^\circ C$	-	15	-	nH
$T_{d(on)}$	Turn On Delay Time	$V_{CC} = 600V$	-	0.26	-	μs
T_r	Rise Time	$V_{GE} = \pm 15V$	-	0.03	-	μs
$T_{d(off)}$	Turn Off Delay Time	$I_C = 300A$ ind. load	-	0.42	-	μs
T_f	Fall Time	$R_{G(on)} = R_{G(off)} = 3.3\Omega$	-	0.07	-	μs
E_{on}	Turn On Energy Loss	$T_J = 125^\circ C$	-	16	-	mJ
E_{off}	Turn Off Energy Loss		-	14.5	-	mJ

Inverse Diode Characteristic Values

Symbol	Name	Conditions	min.	typ.	max.	Unit
V_F	Forward Voltage	$I_F = 150A, V_{GE} = 0V, T_J = 25^\circ C$	-	1.65	2.5	V
		$I_F = 150A, V_{GE} = 0V, T_J = 125^\circ C$	-	1.65	-	
I_{RRM}	Peak Reverse Recovery Current	$I_F = 150A, T_J = 125^\circ C$	-	210	-	A
Q_{rr}	Reverse Recovery Charge	$I_F = 150A, T_J = 125^\circ C$	-	30	-	μC
E_{REC}	Reverse Recovery Energy	$I_F = 150A, T_J = 125^\circ C$	-	13.0	-	mJ

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Document No :
Issue : ENG/06



SML150MAT12

Mechanical And Thermal Properties

Symbol	Name	Conditions	min.	typ.	max.	Unit
R_{thJC}	Thermal Resistance Junction to Case	per IGBT per Diode	- -	0.10 0.17	- -	$^{\circ}CW^{-1}$ $^{\circ}CW^{-1}$
R_{thcK}	Thermal Resistance Case to Heatsink	per module ¹	-	-	0.01	$^{\circ}CW^{-1}$
M	Mounting Torque	module mounting screw terminals	TBA TBA	- -	TBA TBA	Nm Nm
W	Module Weight		-	TBA	-	g

¹ thermal grease, planar heat-sink


Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Document No :
Issue : ENG/06

SML150MAT12

Package and Circuit

Circuit Diagram

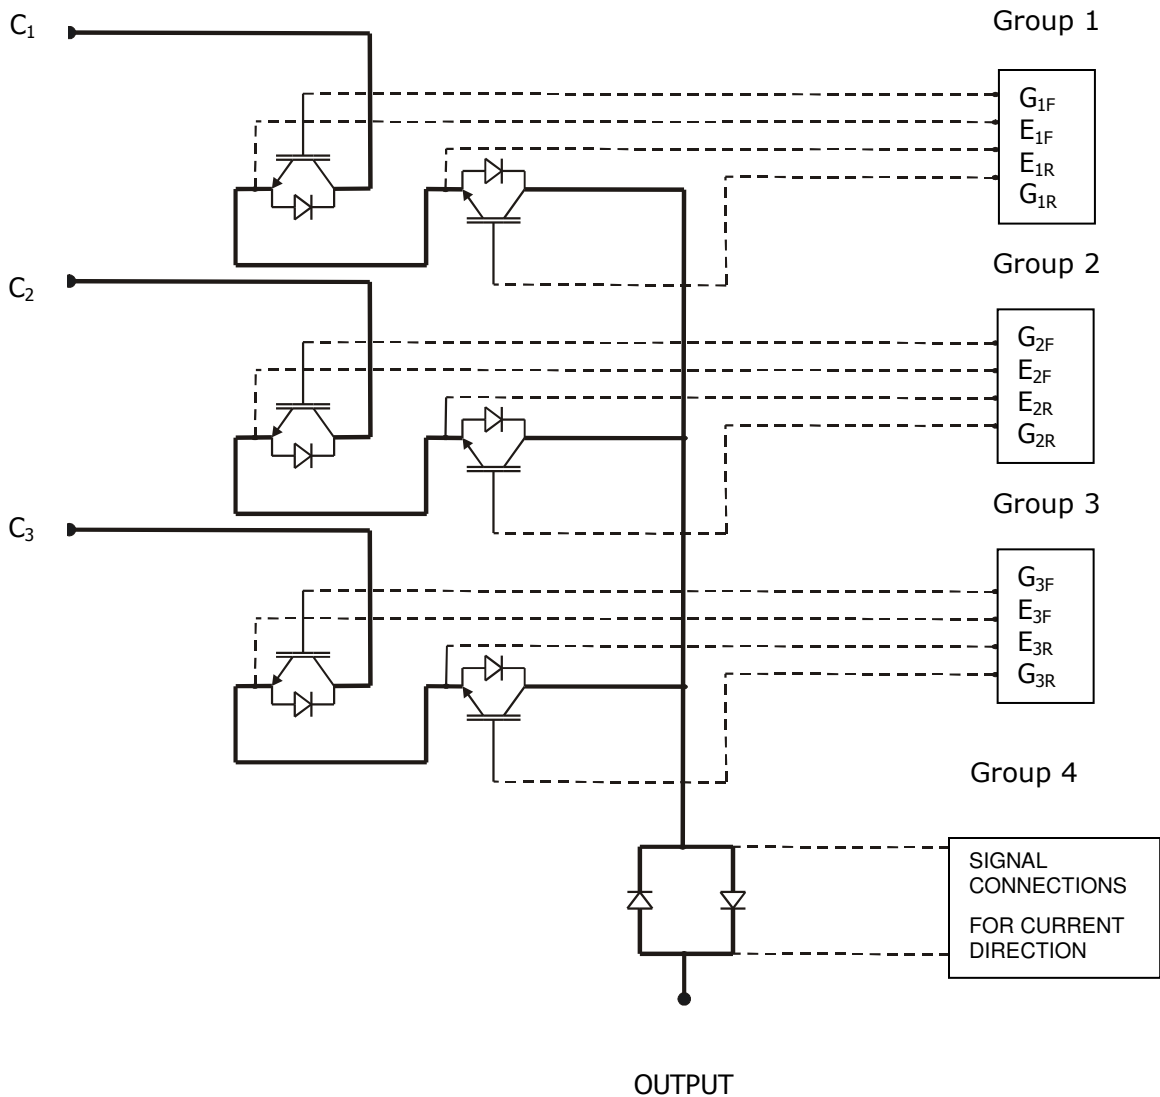


Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Document No :
Issue : ENG/06

SML150MAT12

Package Outline

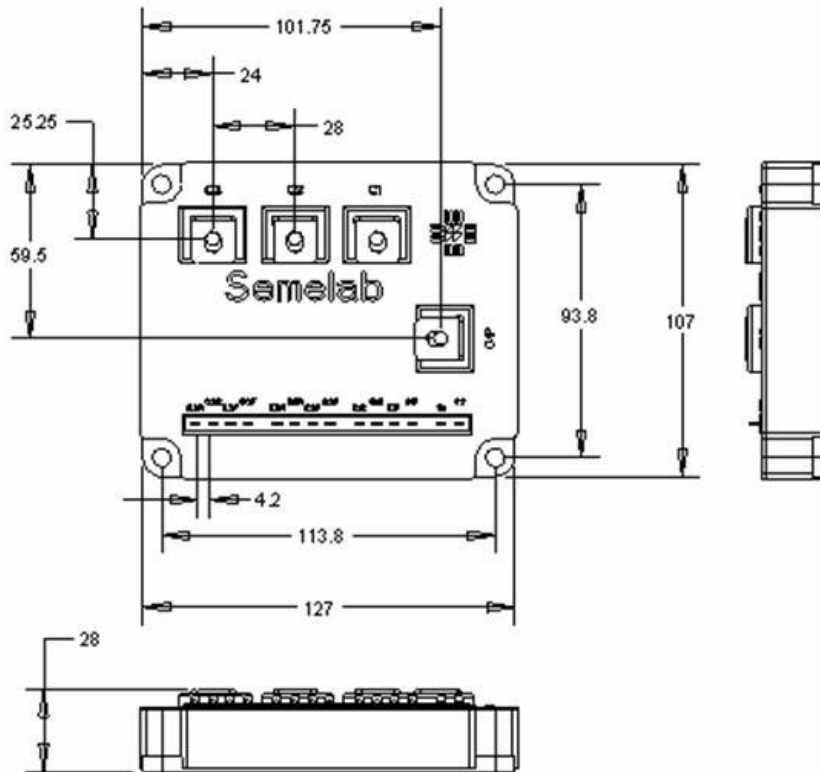


Dimensions in mm

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders


Document No :
Issue : ENG/06

SML150MAT12


output characteristic IGBT-inverter (typical)
 $I_c = f(V_{CE})$
 $V_{GE} = 15\text{ V}$

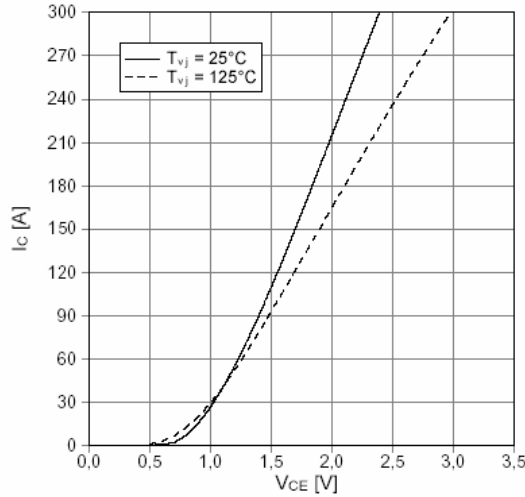


output characteristic IGBT-inverter (typical)
 $I_c = f(V_{CE})$
 $T_{vj} = 125^\circ\text{C}$

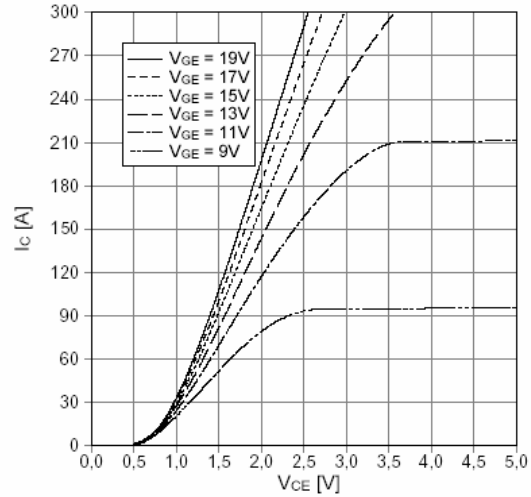

transfer characteristic IGBT-inverter (typical)
 $I_c = f(V_{GE})$
 $V_{CE} = 20\text{ V}$

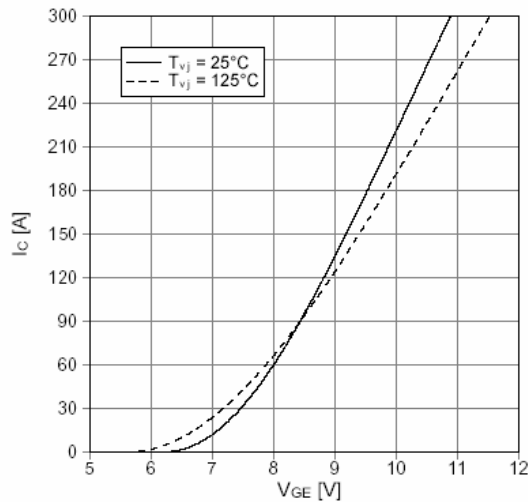

switching losses IGBT-inverter (typical)
 $E_{on} = f(I_c)$, $E_{off} = f(I_c)$
 $V_{GE} = \pm 15\text{ V}$, $R_{Gon} = 2,4\ \Omega$, $R_{Goff} = 2,4\ \Omega$, $V_{CE} = 600\text{ V}$

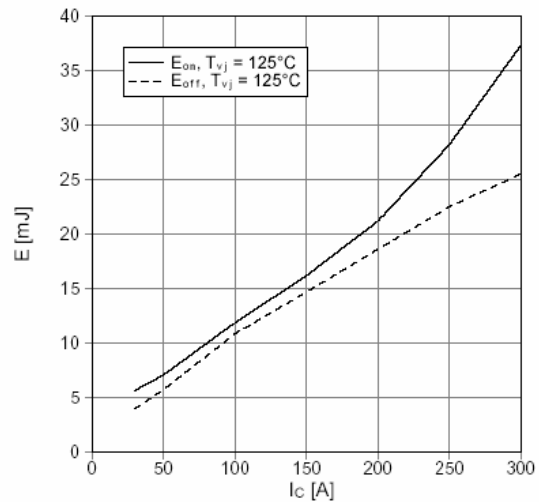


Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders


Document No :
Issue : ENG/06

SML150MAT12


switching losses IGBT-Inverter (typical)
 $E_{on} = f(R_G), E_{off} = f(R_G)$
 $V_{GE} = \pm 15\text{ V}, I_C = 150\text{ A}, V_{CE} = 600\text{ V}$

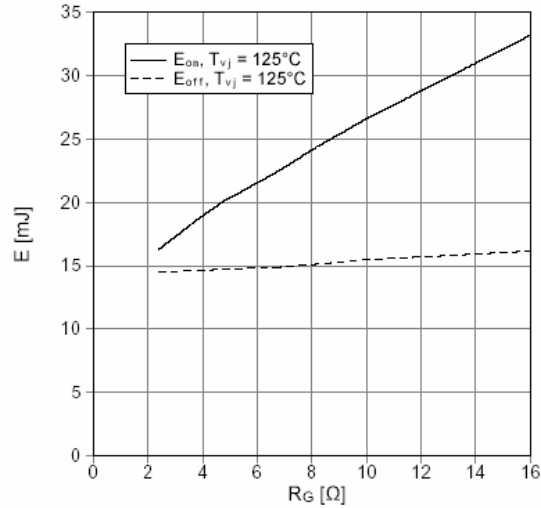

reverse bias safe operating area IGBT-inv. (RBSOA)
 $I_C = f(V_{CE})$
 $V_{GE} = \pm 15\text{ V}, R_{Goff} = 2,4\ \Omega, T_{vj} = 125^\circ\text{C}$

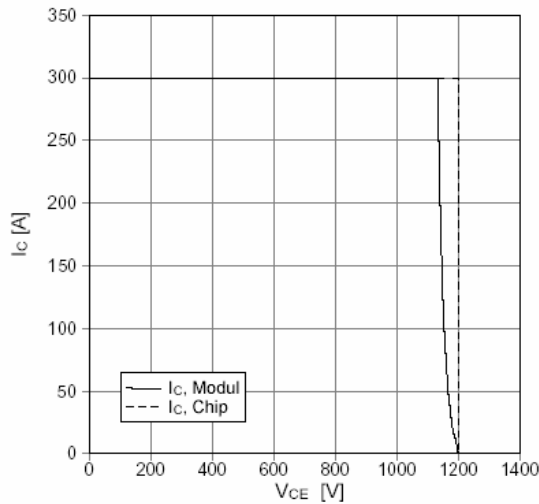


forward characteristic of diode-inverter (typical)
 $I_F = f(V_F)$

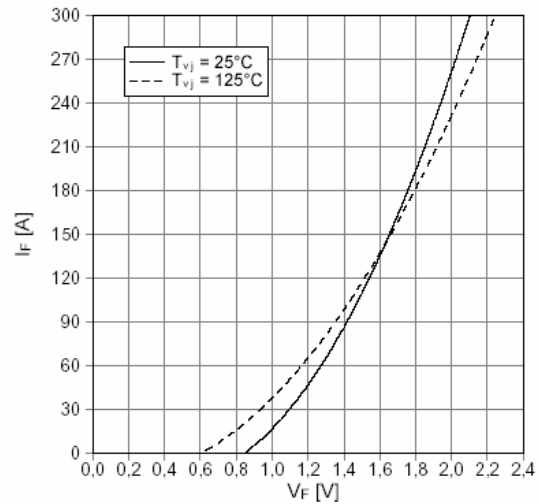

SML150MAT12

switching losses diode-inverter (typical)

$E_{rec} = f(I_F)$
 $R_{Gon} = 2,4 \Omega, V_{CE} = 600 V$

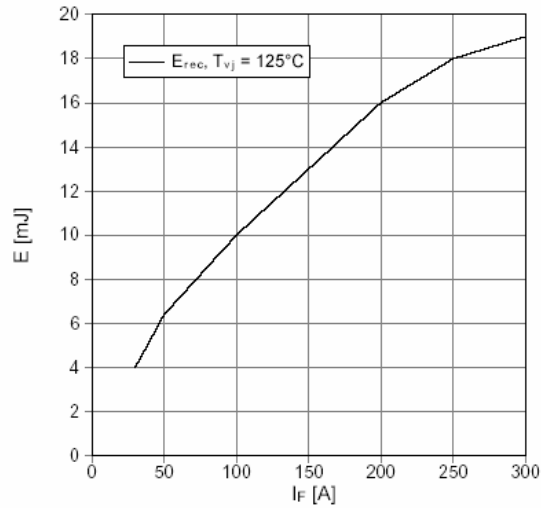

switching losses diode-inverter (typical)

$E_{rec} = f(R_G)$
 $I_F = 150 A, V_{CE} = 600 V$

