

3-TERMINAL 1A POSITIVE ADJUSTABLE REGULATOR


The KIA317P/PI is adjustable 3-terminal positive voltage regulator capable of supplying in excess of 1.5A over a 1.2V to 37V output range.

This is exceptionally easy to use and require only two external resistors to set the output voltage.

Further, both line and load regulation are better than standard fixed regulators.



FEATURES

- Adjustable output between 1.2V and 37V
- Guaranteed 1.5A output current
- Line regulation typically 0.001%/V
- Load regulation typically 0.1%
- 80dB ripple rejection (with Cadj)
- Internal thermal overload protection
- Internal short-circuit current limiting
- Output transistor safe-area compensation

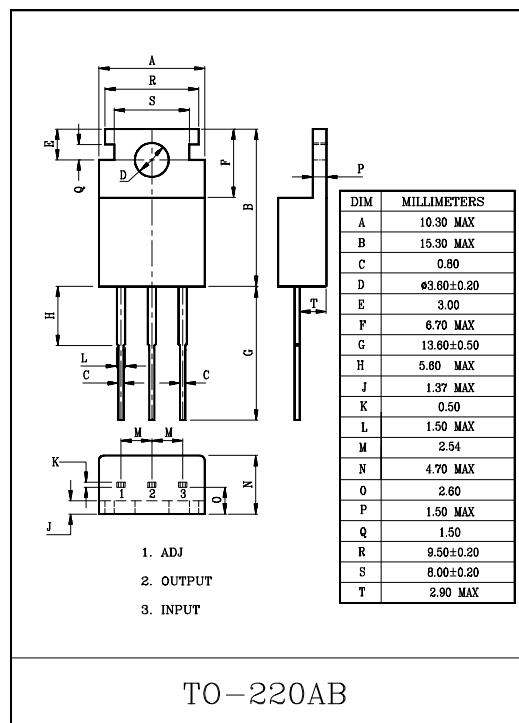

TO-220AB

BLOCK DIAGRAM

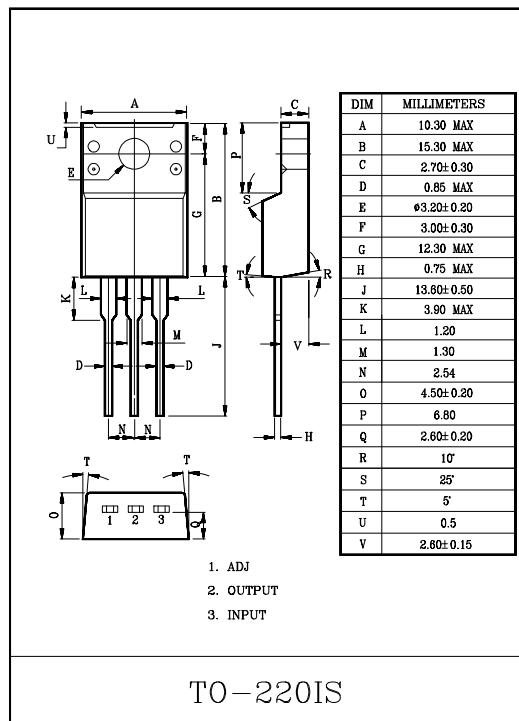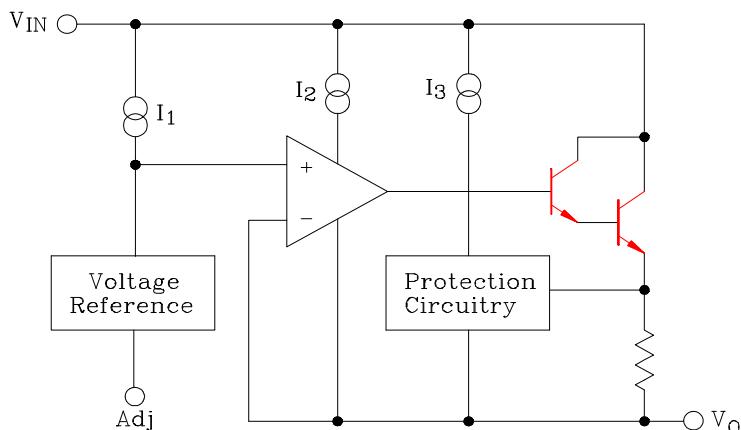

TO-220IS

KIA317P/PI

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input–Output Voltage Differential	V _{in} –V _{out}	40	V
Power Dissipation	P _D	Internally limited	
Operating Temperature	T _{opr}	-30~85	°C
Storage Temperature	T _{stg}	-65~150	°C
Lead Temperature	T _{lead}	230	°C

ELECTRICAL CHARACTERISTICS

(V_I–V_O=5V, I_O=0.5A, 0°C ≤ T_j≤125°C, I_{MAX}=1.5A, P_{MAX}=20W, unless otherwise specified)

CHARACTERISTIC	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Line Regulation	ΔV _O (Line)	T _a =25°C, I _O =10mA	3V ≤ V _{in} –V _{out} ≤40V	–	0.01	0.04	%/V
		T _a =0~125°C, I _O =10mA		–	0.02	0.07	
Load Regulation	ΔV _O (Load)	T _a =25°C,	10mA ≤ I _{out} ≤ I _{MAX}	–	0.1	0.5	%
		T _a =0~125°C,		–	0.3	1.5	
Adjustable Pin Current	I _{Adj}			–	50	100	μA
Adjustable Pin Current Change	ΔI _{Adj}	10mA ≤ I _O ≤ I _{MAX} 3V ≤ V _{in} –V _{out} ≤40V		–	0.2	5	μA
Reference Voltage	V _{ref}	10mA ≤ I _O ≤ I _{MAX} 3V ≤ V _{in} –V _{out} ≤40V, P≤P _{MAX}		1.20	1.25	1.30	V
Temperature Stability	S _T	T _{Min} ≤T _j ≤T _{MAX}		–	1	–	%
Minimum Load Current to Maintain Regulation	I _{O(MIN)}	(V _{in} –V _{out})=40V		–	3.5	10	mA
Current Limit	I _{O(MAX)}	(V _{in} –V _{out})≤15V, P≤P _{MAX}		1.5	2.2	3.4	A
		(V _{in} –V _{out})≤40V, P≤P _{MAX} , T _a =25°C		0.15	0.4	–	A
Output Noise Voltage	V _{NO}	T _a =25°C, 10Hz≤f≤10kHz, % of V _{out}		–	0.0003	–	%
Ripple Rejection Ratio	RR	V _O =10V, f=120Hz		–	65	–	dB
		C _{Adj} =10μF		66	80	–	
Long Term Stability	S _T	T _a =25°C for end point measurement, 1000 Hr		–	0.3	1	%
Thermal Resistance Junction to Case	R _{θjc}		–	–	4	–	°C/W
Thermal Resistance Junction to Ambient (No Heat Sink)	R _{θj-a}		–	–	50	–	°C/W


Note : Load and line regulation are specified at constant junction temperature.

Change in V_O due to heating effects must be taken into account separately.

Pulse testing with low duty is used.(P_{MAX}=20W)

KIA317P/PI

TYPICAL APPLICATION (PROGRAMMABLE REGULATOR)






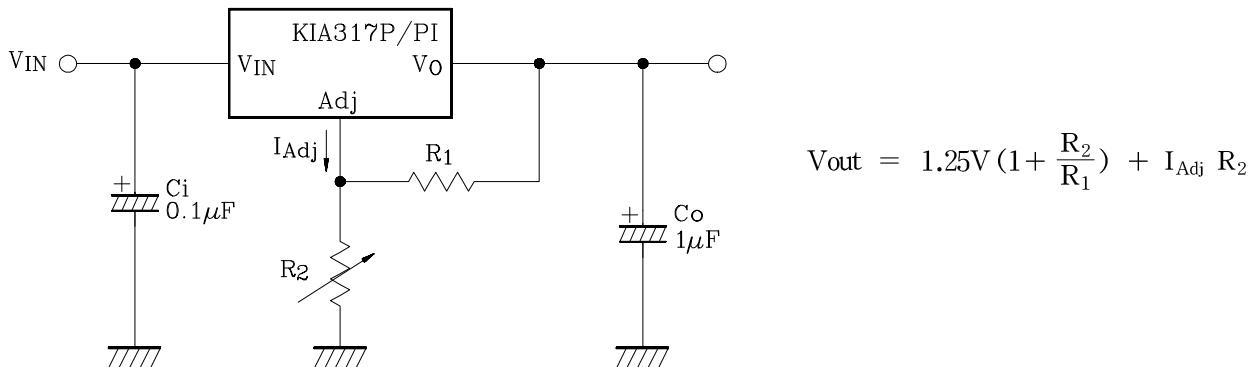


C_i is required when regulator is located an appreciable distance from power supply filter.

C_o is not needed for stability, however, in the range of 1μF to 100μF of aluminum or tantalum electrolytic are commonly used to provide improved output impedance and rejection of transients.


Since I_{Adj} is controlled to less than 100μA, the error associated with this term is negligible in most applications.

KIA317P/PI

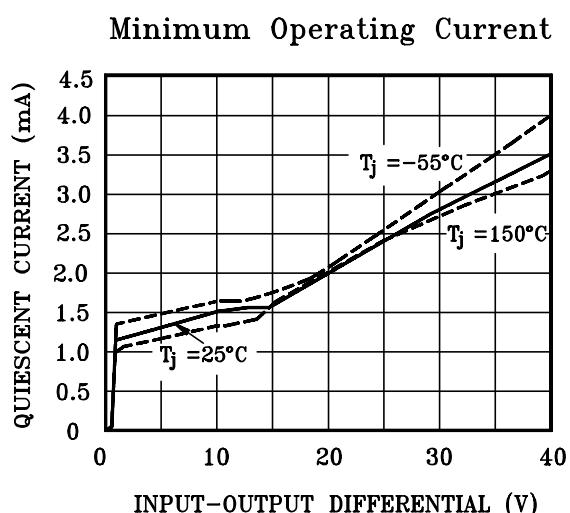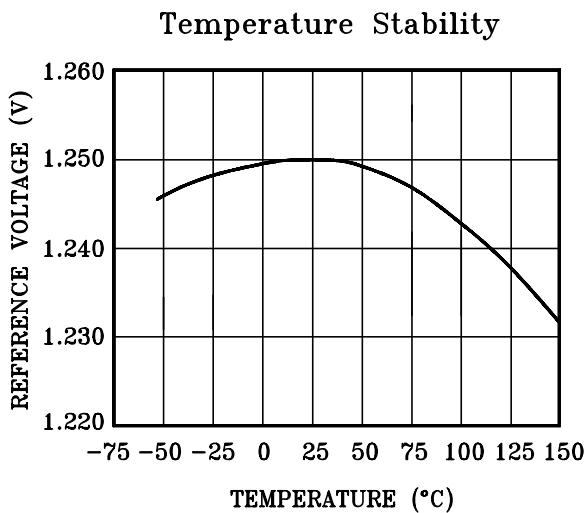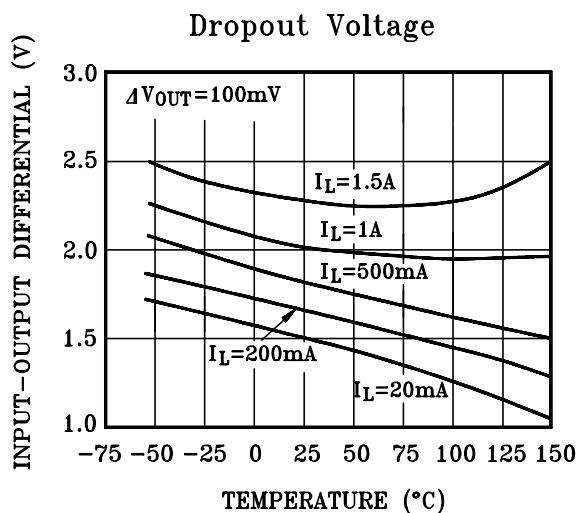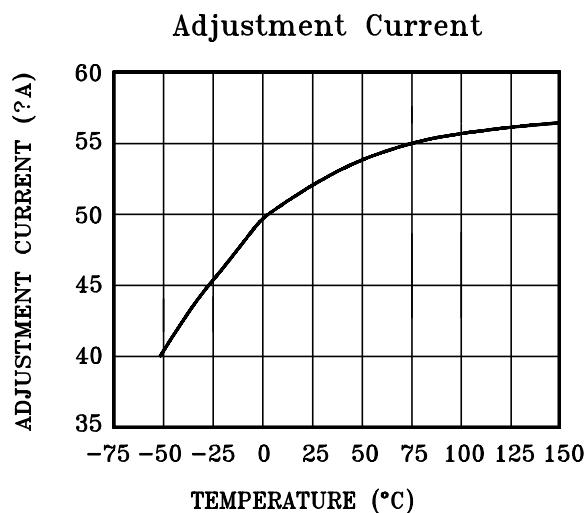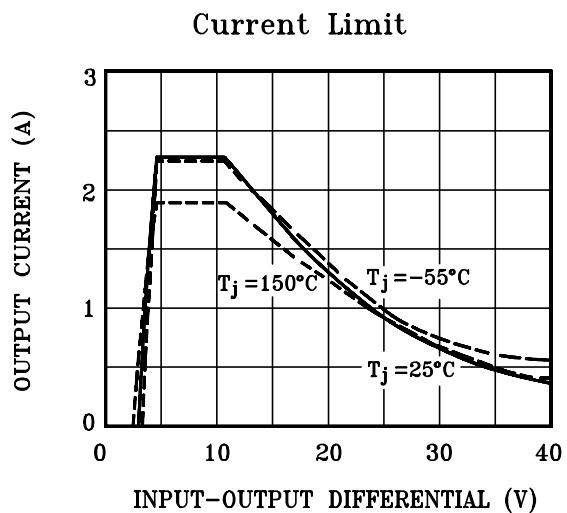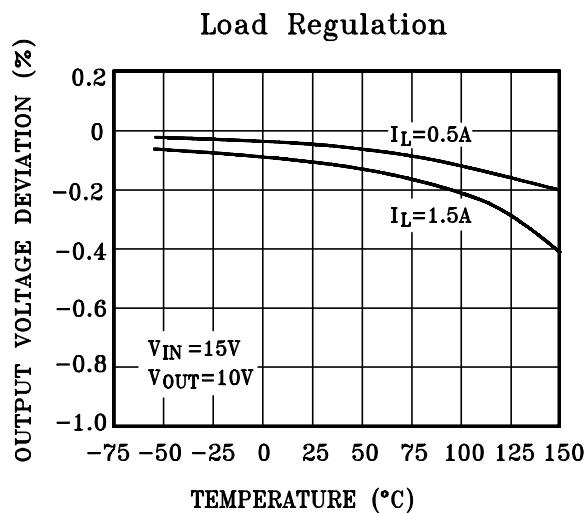


KIA317P/PI


Ripple Rejection

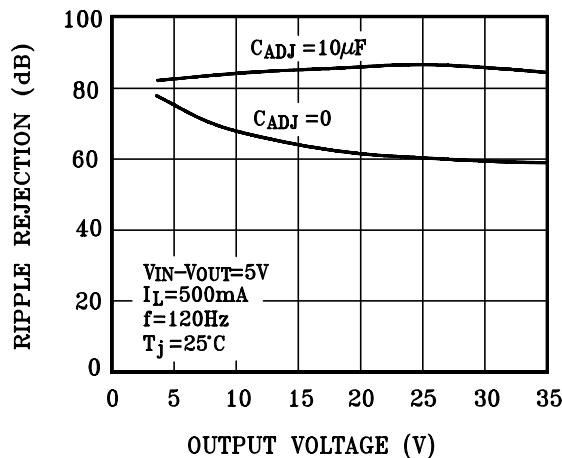


Ripple Rejection

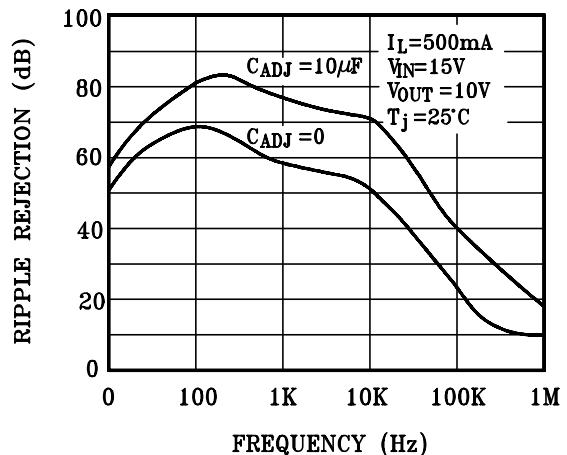


Ripple Rejection

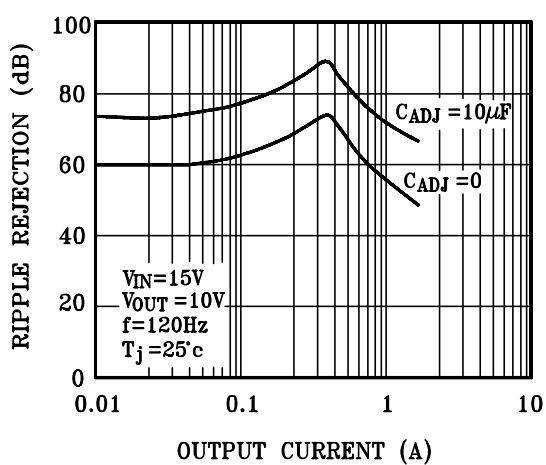

Output Impedance

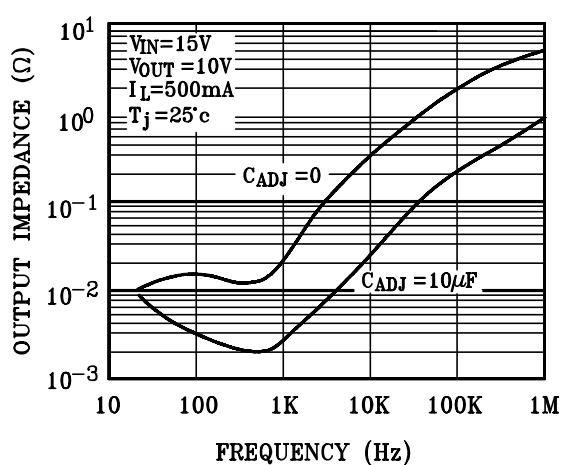

Line Transient Response

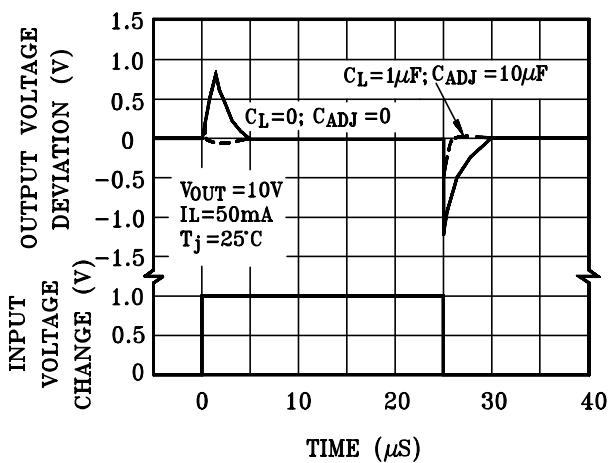

Line Transient Response

