

200 mW DO-35 Hermetically Sealed Glass Fast Switching Schottky Barrier Diode



AXIAL LEAD
DO35

Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Value	Units
P_D	Power Dissipation	200	mW
T_{STG}	Storage Temperature Range	-65 to +125	$^\circ\text{C}$
T_J	Operating Junction Temperature	+125	$^\circ\text{C}$
V_{RRM}	Repetitive Peak Reverse Voltage	30	V
V_R	Maximum DC Blocking Voltage	30	V
$I_{F(AV)}$	Average Forward Rectified Current	200	mA
I_{FSM}	Peak Forward Surge Current	4	A

These ratings are limiting values above which the serviceability of the diode may be impaired.


DEVICE MARKING DIAGRAM



L = Logo
Device Code = BAT42 / BAT43

Specification Features:

- Low Forward Voltage Drop
- DO-35 Package (JEDEC)
- Through-Hole Device Type Mounting
- Hermetically Sealed Glass
- Compression Bonded Construction
- All External Surfaces Are Corrosion Resistant And Leads Are Readily Solderable
- RoHS Compliant
- Solder Hot Dip Tin (Sn) Lead Finish

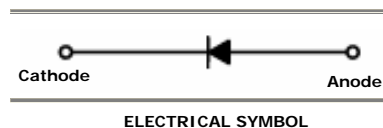


ELECTRICAL SYMBOL

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Condition	Limits		Unit
			Min	Max	
B_V	Breakdown Voltage	$I_R=100\mu\text{A}$	30		Volts
I_R	Reverse Leakage Current	$V_R=25\text{V}$		500	nA
V_F	Forward Voltage	TCBAT42 $I_F=10\text{mA}$	0.26	0.40	Volts
		$I_F=50\text{mA}$		0.65	
		TCBAT43 $I_F=2\text{mA}$		0.33	
		$I_F=15\text{mA}$		0.45	
		TCBAT42, TCBAT43 $I_F=200\text{mA}$		1.0	
T_{RR}	Reverse Recovery Time	$I_F=I_R=10\text{mA}$ $R_L=100\Omega$ $I_{RR}=1\text{mA}$	5 (Typical)		nS
C	Capacitance	$V_R=1\text{V}$, $f=1\text{MHz}$	7 (Typical)		pF

Package Outline

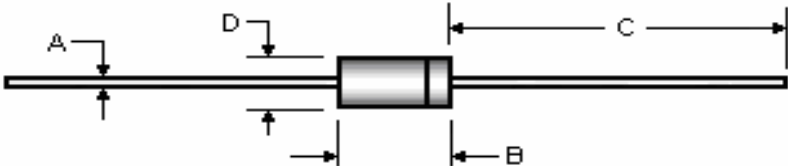Package	Case Outline				
DO-35					
	DO-35				
	DIM	Millimeters		Inches	
		Min	Max	Min	Max
	A	0.46	0.55	0.018	0.022
	B	3.05	5.08	0.120	0.200
	C	25.40	38.10	1.000	1.500
	D	1.53	2.28	0.060	0.090


Notes:

1. All dimensions are within JEDEC standard.

This datasheet presents technical data of Tak Cheong's Schottky Diode. Complete specifications for the individual devices are provided in the form of datasheets. A comprehensive Selector Guide is included to simplify the task of choosing the best set of components required for a specific application. For additional information, please visit our website <http://www.takcheong.com>.

Although information in this datasheet has been carefully checked, no responsibility for the inaccuracies can be assumed by Tak Cheong. Please consult your nearest Tak Cheong's sales office for further assistance.

Tak Cheong reserves the right to make changes without further notice to any products herein to further improve reliability, function or design, cost and productivity.

TAK CHEONG® and  are registered trademarks of Tak Cheong Electronics (Holdings) Co., Ltd.