

Features

- Inputs: 10 to 400VDC
- Output, 1 to 95VDC
- UL, CSA, TÜV, VDE, BABT, CF
- 80–90% efficiency (typical)
- ZCS power architecture
- Low noise FM control
- Booster versions available for expanded power



Specifications

INPUT

Input voltage	See table
---------------	-----------

OUTPUT

PRODUCT GRADE	E, C, I, M
Output voltage	See table
Output power	See table
Set point accuracy	0.5%
Low–high trim voltage	50%–110%
Output ripple pk-pk	1%
Load regulation	0.05%
Line regulation	0.05%
OVP set point	115%–135%
Current limit setting	105%–125%
Remote sense Compensation	0.5V

OPERATING

MTBF	>1,000,000 hrs
Efficiency	80%–90%
Isolation input – output	3750V rms
Baseplate operating temp.	85°C
Shutdown temperature	95°C
Thermal shutdown	Yes, C, I, M grades

ENVIRONMENTAL

Cooling	External cooling often required, consult sales office
---------	---

STANDARDS AND APPROVALS

Safety	UL1950, CSA C22.2 No. 950, TÜV IEC950, EN60950, VDE 0805
C-Tick	AS/NZS CISPR11 Group 1 Class A

MECHANICAL

Dimensions	117x61x12.7mm
PCB mounting	Yes

Selection Table Guide

VI - 2 [a] [b] - [c] [d]

VI - B [a] [b] - [c] [d] Booster

Note: For RoHS version replace VI with VE.

Mechanical Drawings See page 230

Selection Table

A = INPUT VOLTAGE			B = OUTPUT VOLTAGE	
Nominal	Range	Notes		
0= 12V	10–20V (1)		Z = 2V	2 = 15V
1= 24V	21–32V (6)		Y = 3.3V	N = 18.5V
W= 24V	18–36V (4)		0 = 5V	3 = 24V
2= 36V	21–56V (3)		X = 5.2V	L = 28V
3= 48V	42–60V (6)		W = 5.5V	J = 36V
N= 48V	36–76V (6)		V = 5.8V	K = 40V
4= 72V	55–100V (6)		T = 6.5V	4 = 48V
T= 110V	66–160V (4)		R = 7.5V	H = 52V
5= 150V	100–200V (5)		M = 10V	F = 72V
6= 300V	200–400V (6)		1 = 12V	D = 85V
7= 150/300V	100–375V (2)		P = 13.8V	B = 95V

C = PRODUCT GRADE		D = OUTPUT POWER/CURRENT	
	V out ≥5V	V out <5V	
E= -10°C to +85°C	Y= 50W	Y= 10A	
C= -25°C to +85°C	X= 75W	X= 15A	
I= -40°C to +85°C	W= 100W	W= 20A	
M= -55°C to +85°C	V= 150W	V= 30A	
	U= 200W	U= 40A	

NOTES:


NOTES: Maximum Output for —	(1)	(2)	(3)	(4)	(5)	(6)
5V Outputs	75W	75W*	100W	150W	150W	200W
>5V Outputs	75W	100W	100W	150W	200W	200W
<5V Outputs	15A	20A	20A	30A	40A	40A

*100W @ 5V (20A), 300V input only.


Mechanical Drawings

FULL AND JUNIOR SIZED MECHANICAL SPECIFICATIONS


JUNIOR SIZED MODULES

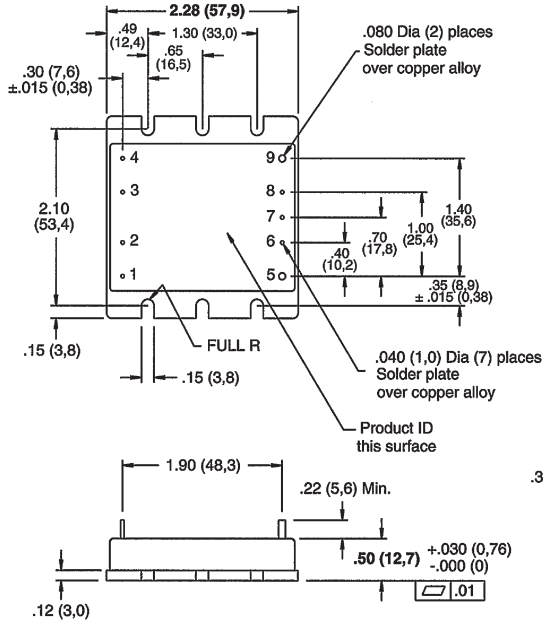

Half Size Modules				
Pin #	VI-J00	VI-AIM	VI-IAM	VI-RAM
1	+In	L1	+In	+In
2	Gate In	NC	+In	+Sense In
3	Gate Out	NC	-In	-Sense In
4	-In	L2/N	-In	-In
5	+Out	+Out	+Out	+Out
6	+Sense	Gate In	Gate In	+Sense
7	Trim	Parallel	Parallel	NC
8	-Sense	Gate Out	Gate Out	-Sense
9	-Out	-Out	-Out	-Out



FULL SIZED MODULES

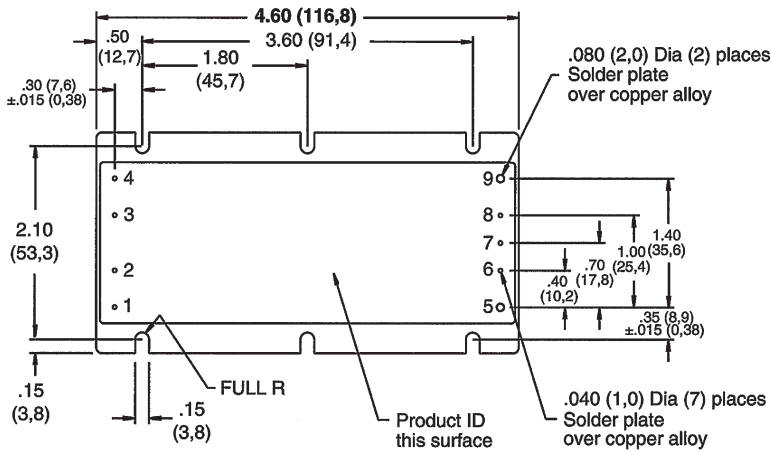

Full Size Modules			
Pin #	VI-200	BatMod	VI-HAM
1	+In	+In	L1
2	Gate In	Gate In	Gate In
3	Gate Out	Gate Out	Gate Out
4	-In	-In	L2/N
5	+Out	+Out	+Out
6*	+Sense	VTRIM	P/OK
7*	Trim	ITRIM	E/O
8*	-Sense	IMON	A/S
9	-Out	-Out	-Out

* Do not connect on Booster modules

