

## Description

The M08, M16 Series Mini-Annunciators provide remote annunciation in a compact, versatile, and distinctive design.

The Mini-Annunciators are manufactured in eight or sixteen zone versions, and are back-lit with either high intensity led or incandescent lamp indicators.

These units are UL Listed for either interior or optional weatherproof applications. The incandescent lamp units are available with dual lamp configuration as an option for unsupervised operation. The annunciator is supplied with a surface back box, while a flush trim ring is also supplied for flush mounted versions. The cabinet is 16-gauge steel with a black textured epoxy finish. Red finish is available as an option.


A lettering kit is furnished to allow application of custom zone designations to the 1/8-inch Lexan nameplate. Optional factory lettering is also available.

Other optional accessories include a Remote Trouble Indicator with Reset Keyswitch and a Lamp Test Switch.

## Specifications

<b>Operating Voltage:</b> (Lamp style)	24 VDC (common positive)
<b>Alarm Current:</b>	
<b>Incandescent Lamp</b>	.080 amp./zone
<b>LED</b>	.012 amp./zone
<b>Legend size:</b>	
<b>Eight zone</b>	2 lines of 10 characters per zone (18 point letters)
<b>Sixteen zone</b>	2 lines of 12 characters per zone (14 point letters)
<b>Dimensions:</b>	
<b>Surface mount</b>	8.5" W x 6.4" H, x 3.4" D (21.6 W x 16.3 H x 8.6 D cm)
<b>Flush mount</b>	10.4" W x 8.25" H x 3.1" D (26.3 W x 21 H x 8 D cm)
<b>Weatherproof</b>	.9" H x 3.25" D (2.2 H x 8.3 D cm)

## Mini-Annunciators, Back-Lit

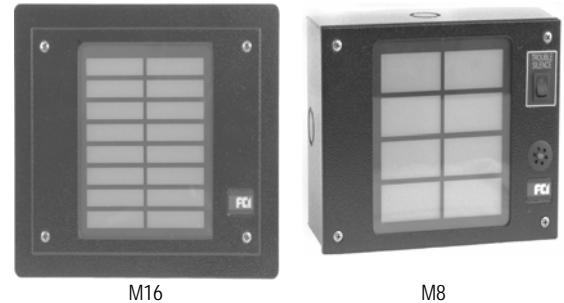

## Features

- Supervised indicators for use with FCI control panels.
- 8 or 16-zone capacity.
- Backlit operation.
- Dual lamp incandescent operation
- Remote trouble indicator (optional)
- Remote reset keyswitch (optional)
- Lamp test switch (optional)
- Weatherproof mounting (optional)

## Ordering Information

Part Number	Description
138-92311	M08-8-zone LED annunciator
138-92511	M08R 8-zone LED w/RT1, lamp test & reset switch
138-94311	M08W 8-zone LED, weatherproof
138-92411	M08-Inc 8-zone incandescent lamp
138-92611	M08R/Inc 8-zone incandescent lamp with RT1, lamp test & reset switch
138-94411	M08-W/Inc 8-zone incandescent lamp, weatherproof
138-42311	M16 16-zone LED annunciator
138-42511	M16-R 16-zone LED w/RT1, lamp test & reset switch
138-44311	M16-W 16-zone LED, weatherproof
138-42411	M16-Inc 16-zone incandescent lamp, w/RTI, lamp test & reset switch
138-44411	M16-W/Inc 16-zone incandescent lamp, weatherproof

### GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472 - Tel: (203) 484-7161 - Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.