



# DS1254


## 2M x 8 NV SRAM with Phantom Clock

[www.dalsemi.com](http://www.dalsemi.com)

### FEATURES


- Real time clock keeps track of hundredths of seconds, seconds, minutes, hours, days, date, months, and years with automatic leap year compensation valid up to the year 2100
- 2M x 8 NV SRAM
- Watch function is transparent to RAM operation
- Automatic data protection during power loss
- Unlimited write cycle endurance
- Surface-mountable BGA module construction
- Over 10 years of data retention in the absence of power
- Battery monitor checks remaining capacity daily
- +3.3V or +5V operation

### PACKAGE OUTLINE



(Side -A- Shown)

(For Reference Only Not To Scale)



BGA Module Base  
Bottom View

### ORDERING INFORMATION

PART #	DESCRIPTION
DS1254X	2M X 8 NV SRAM with Phantom Clock

W	+3.3V operation
Y	+5.0V operation

### PIN DESCRIPTION

V <sub>CC</sub>	- Supply Voltage
A0-A20	- Address Inputs
DQ0-DQ7	- Data I/O
$\overline{\text{CE}}$	- Chip Enable Input
$\overline{\text{OE}}$	- Output Enable Input
$\overline{\text{WE}}$	- Write Enable Input
BW	- Battery Warning Output (Open Drain)
GND	- Ground


## DESCRIPTION

The DS1254 is a fully static nonvolatile RAM (organized as 2M words by 8 bits) with built-in real time clock. The DS1254 has a self-contained lithium energy source and control circuitry which constantly monitors  $V_{CC}$  for an out-of-tolerance condition. When such a condition occurs, the DS1254 makes use of an attached DS3800 Battery Cap to maintain clock information and preserve stored data while protecting that data by disallowing all memory accesses. Additionally, the DS1254 has dedicated circuitry for monitoring the status of an attached DS3800 Battery Cap.

The Phantom Clock provides timekeeping information including hundredths of seconds, seconds, minutes, hours, day, date, month, and year information. The date at the end of the month is automatically adjusted for months with less than 31 days, including correction for leap years. The phantom clock operates in either 24-hour or 12-hour format with an AM/PM indicator.

## Pin Assignment Figure 1

Because the DS1254 has a total of 168 balls and only 35 active signals, balls are wired together into groups, thus providing redundant connections for every signal.

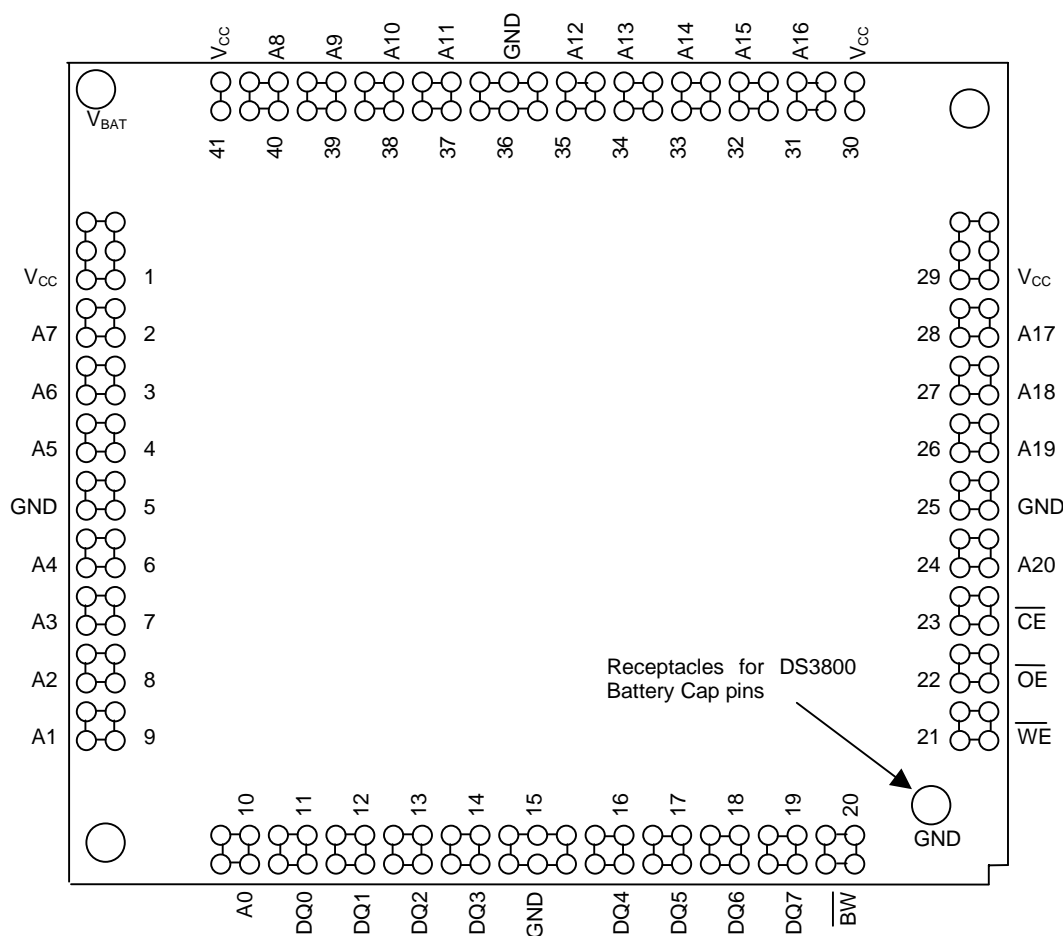

## RAM READ MODE

The DS1254 executes a read cycle whenever  $\overline{\text{WE}}$  is inactive (high) and  $\overline{\text{CE}}$  is active (low). The unique address specified by the 21 address inputs (A0-A20) defines which of the 2M bytes of data is to be accessed. Valid data will be available to the eight data output drivers within  $t_{\text{ACC}}$  (Access Time) after the last address input is stable, providing that  $\overline{\text{CE}}$  and  $\overline{\text{OE}}$  access times and states are also satisfied. If  $\overline{\text{OE}}$  and  $\overline{\text{CE}}$  access times are not satisfied, then data access must be measured from the later occurring signal ( $\overline{\text{CE}}$  or  $\overline{\text{OE}}$ ) and the limiting parameter is either  $t_{\text{CO}}$  for  $\overline{\text{CE}}$  or  $t_{\text{OE}}$  for  $\overline{\text{OE}}$  rather than address access.

## RAM WRITE MODE

The DS1254 is in the write mode whenever  $\overline{\text{WE}}$  and  $\overline{\text{CE}}$  are in their active (low) state after address inputs are stable. The later occurring falling edge of  $\overline{\text{CE}}$  or  $\overline{\text{WE}}$  will determine the start of the write cycle. The write cycle is terminated by the earlier rising edge of  $\overline{\text{CE}}$  or  $\overline{\text{WE}}$ . All address inputs must be kept valid throughout the write cycle.  $\overline{\text{WE}}$  must return to the high state for a minimum recovery time ( $t_{\text{WR}}$ ) before another cycle can be initiated. The  $\overline{\text{OE}}$  control signal should be kept inactive (high) during write cycles to avoid bus contention. However, if the output bus has been enabled ( $\overline{\text{CE}}$  and  $\overline{\text{OE}}$  active) then  $\overline{\text{WE}}$  will disable the outputs in  $t_{\text{ODW}}$  from its falling edge.

## DATA RETENTION MODE

The device is fully accessible and data can be written and read only when  $V_{\text{CC}}$  is greater than  $V_{\text{PF}}$ . However, when  $V_{\text{CC}}$  falls below the power fail point  $V_{\text{PF}}$  (point at which write protection occurs) the internal clock registers and SRAM are blocked from any access. When  $V_{\text{CC}}$  falls below  $V_{\text{BAT}}$ , device power is switched from the  $V_{\text{CC}}$  to  $V_{\text{BAT}}$ . RTC operation and SRAM data are maintained from the battery until  $V_{\text{CC}}$  is returned to nominal levels. All signals must be powered down when  $V_{\text{CC}}$  is powered down.

## PHANTOM CLOCK OPERATION

Communication with the Phantom Clock is established by pattern recognition on a serial bit stream of 64 bits which must be matched by executing 64 consecutive write cycles containing the proper data on DQ0. All accesses which occur prior to recognition of the 64-bit pattern are directed to memory.

After recognition is established, the next 64 read or write cycles either extract or update data in the Phantom Clock, and memory access is inhibited.


Data transfer to and from the timekeeping function is accomplished with a serial bit stream under control of Chip Enable ( $\overline{\text{CE}}$ ), Output Enable ( $\overline{\text{OE}}$ ), and Write Enable ( $\overline{\text{WE}}$ ). Initially, a read cycle to any memory location using the  $\overline{\text{CE}}$  and  $\overline{\text{OE}}$  control of the Phantom Clock starts the pattern recognition sequence by moving a pointer to the first bit of the 64-bit comparison register. Next, 64 consecutive write cycles are executed using the  $\overline{\text{CE}}$  and  $\overline{\text{WE}}$  signals of the device. These 64 write cycles are used only to gain access to the Phantom Clock. Therefore, any address within the first 512 kbytes of memory, (00h to 7FFFh) is acceptable. However, the write cycles generated to gain access to the Phantom Clock are also writing data to a location in the memory. The preferred way to manage this requirement is to set aside just one address location in memory as a Phantom Clock scratch pad. When the first write cycle is executed, it is compared to bit 0 of the 64-bit comparison register. If a match is found, the pointer increments to the next location of the comparison register and awaits the next write cycle. If a match is not found, the pointer does not advance and all subsequent write cycles are ignored. If a read cycle occurs at any time during pattern recognition, the present sequence is aborted and the comparison register pointer is reset.

Pattern recognition continues for a total of 64 write cycles as described above until all the bits in the comparison register have been matched (this bit pattern is shown in Figure 2). With a correct match for 64-bits, the Phantom Clock is enabled and data transfer to or from the timekeeping registers can proceed. The next 64 cycles will cause the Phantom Clock to either receive or transmit data on DQ0, depending on the level of the  $\overline{OE}$  pin or the  $\overline{WE}$  pin. Cycles to other locations outside the memory block can be interleaved with  $\overline{CE}$  cycles without interrupting the pattern recognition sequence or data transfer sequence to the Phantom Clock.

## PHANTOM CLOCK REGISTER INFORMATION

The Phantom Clock information is contained in eight registers of 8-bits, each of which is sequentially accessed one bit at a time after the 64-bit pattern recognition sequence has been completed. When updating the Phantom Clock registers, each register must be handled in groups of 8-bits. Writing and reading individual bits within a register could produce erroneous results. These read/write registers are defined in Figure 3.


## PHANTOM CLOCK PROTOCOL DEFINITION Figure 2

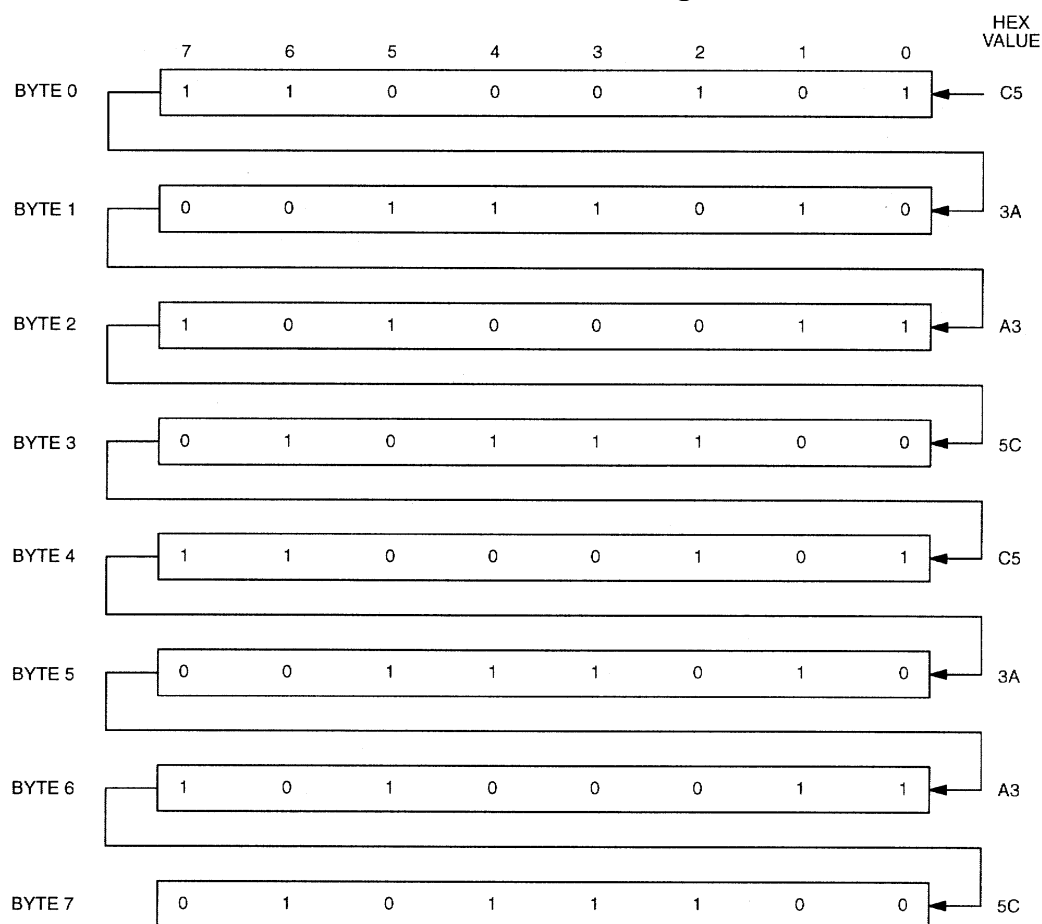

### NOTE:

The pattern recognition in Hex is C5, 3A, A3, 5C, C5, 3A, A3, 5C. The odds of this pattern being accidentally duplicate and causing inadvertent entry to the Phantom Clock is less than  $1$  in  $10^{19}$ . This pattern is sent to the Phantom Clock LSB to MSB.

# PHANTOM CLOCK REGISTER DEFINITION Figure 3

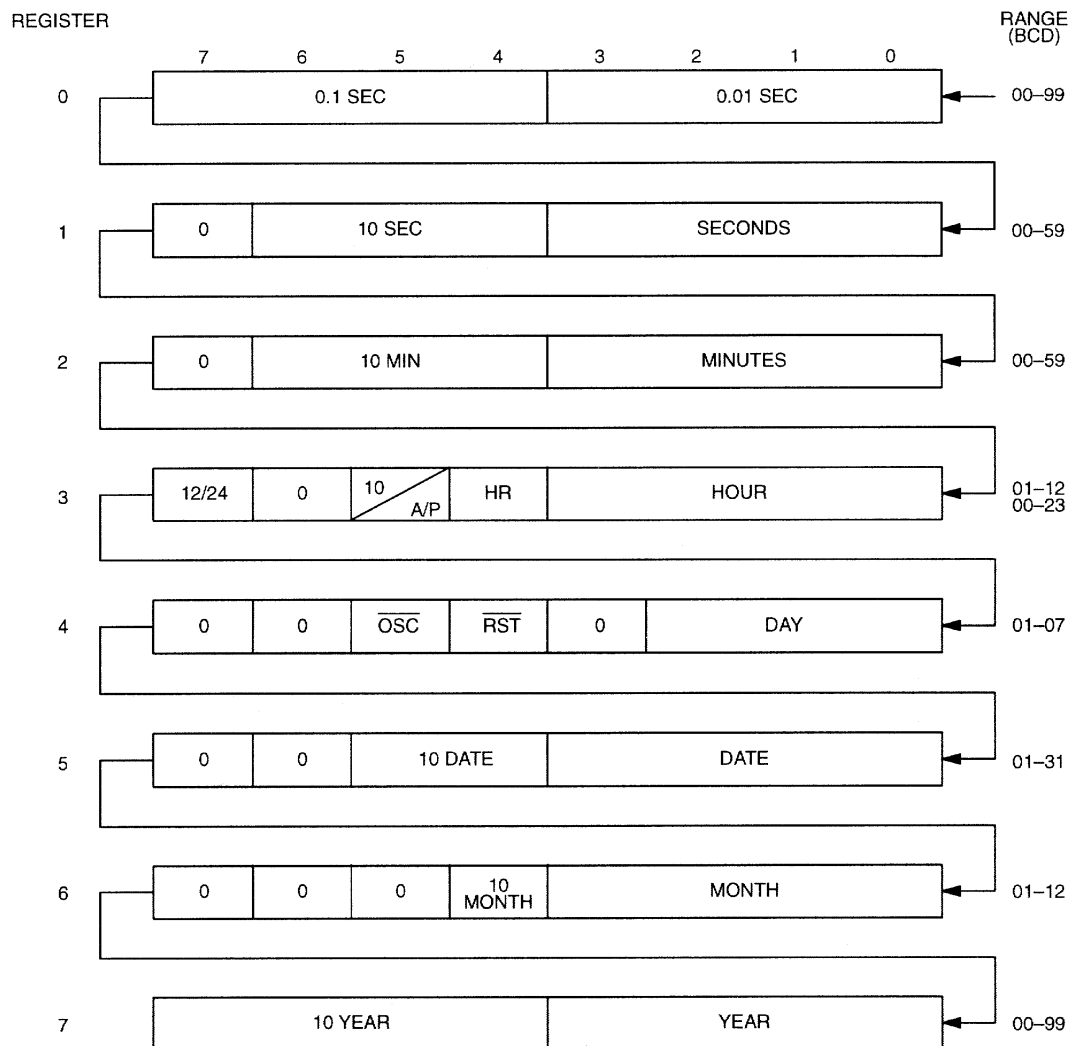

## AM-PM/12/24 MODE

Bit 7 of the hours register is defined as the 12- or 24-hour mode select bit. When high, the 12-hour mode is selected. In the 12-hour mode, bit 5 is the AM/PM bit with logic high being PM. In the 24-hour mode, bit 5 is the second 10-hour bit (20-23 hours).

## OSCILLATOR BIT

Bit 5 of the day register controls the oscillator. When set to logic 1, the oscillator is off. When set to logic 0, the oscillator turns on and the watch becomes operational.

## ZERO BITS

Registers 1, 2, 3, 4, 5, and 6 contain one or more bits which will always read logic 0. When writing these locations, either a logic 1 or 0 is acceptable.

## BATTERY MONITORING

The DS1254 automatically monitors the battery in an attached DS3800 Battery Cap on a 24-hour time interval. Such monitoring begins within  $t_{REC}$  after  $V_{CC}$  rises above  $V_{PF}$  and is suspended when power failure occurs.

After each 24-hour period has elapsed, the battery is connected to an internal  $1\text{ M}\Omega$  test resistor for one second. During this one second, if the battery voltage falls below the battery voltage trip point ( $\sim 2.6\text{V}$ ), the battery warning output  $\overline{BW}$  is asserted. Once asserted,  $\overline{BW}$  remains active until the attached DS3800 Battery Cap is replaced. However, the battery is still re-tested after each  $V_{CC}$  power-up, even if was active on power-down. If the battery voltage is found to be higher than  $\sim 2.6\text{V}$  during such testing,  $\overline{BW}$  is de-asserted and regular testing resumes.  $\overline{BW}$  has an open-drain output driver.

**ABSOLUTE MAXIMUM RATINGS\***

Voltage on Any Pin Relative to Ground	-0.3V to +6.0V
Operating Temperature	0°C to +70°C
Storage Temperature	-40°C to +70°C
Soldering Temperature	See J-STD-020A specification

\* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

**RECOMMENDED DC OPERATING CONDITIONS**

(0°C to 70°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Power Supply Voltage (5V operation)	V <sub>CC</sub>	4.5	5.0	5.5	V	1
Power Supply Voltage (3.3V operation)	V <sub>CC</sub>	3.0	3.3	3.7	V	1
Logic 1 Voltage All Inputs V <sub>CC</sub> = 5V±10%	V <sub>IH</sub>	2.2		V <sub>CC</sub> +0.3	V	1
V <sub>CC</sub> = 3.3V±10%	V <sub>IH</sub>	2.0		V <sub>CC</sub> +0.3	V	1
Logic 0 Voltage All Inputs V <sub>CC</sub> = 5V±10%	V <sub>IL</sub>	-0.3		0.8	V	1
V <sub>CC</sub> = 3.3V±10%	V <sub>IL</sub>	-0.3		0.6	V	1

**DC ELECTRICAL CHARACTERISTICS**(0°C to 70°C; V<sub>CC</sub> = 5.0V±10%)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Input Leakage Current	I <sub>IL</sub>	-4.0		+4.0	μA	
I/O Leakage Current	I <sub>IO</sub>	-4.0		+4.0	μA	
Output Current @ 2.4V	I <sub>OH</sub>	-1.0			mA	3
Output Current @ 0.4V	I <sub>OL</sub>	2.0			mA	3
Standby Current $\overline{CE}$ = 2.2V	I <sub>CCS1</sub>		5.0	10	mA	
Standby Current $\overline{CE}$ = V <sub>CC</sub> -0.5V	I <sub>CCS2</sub>		3.0	5.0	mA	
Operating Current, t <sub>CYC</sub> = 100 ns	I <sub>CCO1</sub>			85	mA	
Write Protection Voltage	V <sub>PF</sub>	4.25		4.50	V	1

**DC ELECTRICAL CHARACTERISTICS**(0°C to 70°C; V<sub>CC</sub> = 3.3V±10%)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Input Leakage Current	I <sub>IL</sub>	-4.0		+4.0	μA	
I/O Leakage Current	I <sub>IO</sub>	-4.0		+4.0	μA	
Output Current @ 2.4V	I <sub>OH</sub>	-1.0			mA	3
Output Current @ 0.4V	I <sub>OL</sub>	2.0			mA	3
Standby Current $\overline{CE}$ = 2.2V	I <sub>CCS1</sub>		5.0	7	mA	
Standby Current $\overline{CE}$ = V <sub>CC</sub> -0.5V	I <sub>CCS2</sub>		2.0	3.0	mA	
Operating Current, t <sub>CYC</sub> = 100 ns	I <sub>CCO1</sub>			50	mA	
Write Protection Voltage	V <sub>PF</sub>	2.8		2.97	V	1

**CAPACITANCE**(T<sub>A</sub> = 25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Input Capacitance: A0-A18, OE, WE, CE	C <sub>IN</sub>		25	50	pF	
Input Capacitance: A19-A20	C <sub>IN</sub>		5	10	pF	
I/O Capacitance: DQ0-DQ7	C <sub>IO</sub>		25	50	pF	
Output Capacitance: BW	C <sub>OUT</sub>		5	10	pF	

**AC ELECTRICAL CHARACTERISTICS**(0°C to 70°C; V<sub>CC</sub> = 5.0V±10%)


PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTES
Read Cycle Time	t <sub>RC</sub>	100		nS	
Address Access Time	t <sub>AAC</sub>		100	nS	
OE to Output Valid	t <sub>OE</sub>		55	nS	
CE to Output Valid	t <sub>CO</sub>		100	nS	
CE or OE to Output Active	t <sub>COE</sub>	5		nS	2
Output High Z from Deselection	t <sub>OD</sub>		35	nS	2
Output Hold from Address Change	t <sub>OH</sub>	5		nS	
Write Cycle Time	t <sub>WC</sub>	100		nS	
WE, CE Pulse Width	t <sub>WP</sub>	70		nS	5
Address Setup Time	t <sub>AW</sub>	0		nS	
Address Hold Time	t <sub>AH1</sub>	5		nS	6
	t <sub>AH2</sub>	25		nS	7
Output High Z from WE	t <sub>ODW</sub>		35	nS	2
Output Active from WE	t <sub>OEW</sub>	5		nS	2
Data Setup Time	t <sub>DS</sub>	40		nS	8
Data Hold Time	t <sub>DH1</sub>	0		nS	6
	t <sub>DH2</sub>	20		nS	8
Read Recovery (Clock Access Only)	t <sub>RR</sub>	20		nS	
Write Recovery (Clock Access Only)	t <sub>WR</sub>	20		nS	



# AC ELECTRICAL CHARACTERISTICS (0°C to 70°C; VCC = 3.3V±10%)


PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTES
Read Cycle Time	t <sub>RC</sub>	150		nS	
Address Access Time	t <sub>AAC</sub>		150	nS	
$\overline{\text{OE}}$ to Output Valid	t <sub>OE</sub>		75	nS	
$\overline{\text{CE}}$ to Output Valid	t <sub>CO</sub>		150	nS	
$\overline{\text{CE}}$ or $\overline{\text{OE}}$ to Output Active	t <sub>COE</sub>	5		nS	2
Output High Z from Deselection	t <sub>OD</sub>		70	nS	2
Output Hold from Address Change	t <sub>OH</sub>	5		nS	
Write Cycle Time	t <sub>WC</sub>	150		nS	
$\overline{\text{WE}}$ , $\overline{\text{CE}}$ Pulse Width	t <sub>WP</sub>	100		nS	5
Address Setup Time	t <sub>AW</sub>	0		nS	
Address Hold Time	t <sub>AH1</sub>	5		nS	6
	t <sub>AH2</sub>	25		nS	7
Output High Z from $\overline{\text{WE}}$	t <sub>ODW</sub>		70	nS	2
Output Active from $\overline{\text{WE}}$	t <sub>OEW</sub>	5		nS	2
Data Setup Time	t <sub>DS</sub>	60		nS	8
Data Hold Time	t <sub>DH1</sub>	0		nS	6
	t <sub>DH2</sub>	20		nS	8
Read Recovery (Clock Access Only)	t <sub>RR</sub>	20		nS	
Write Recovery (Clock Access Only)	t <sub>WR</sub>	20		nS	

## MEMORY READ CYCLE TIMING Figure 4

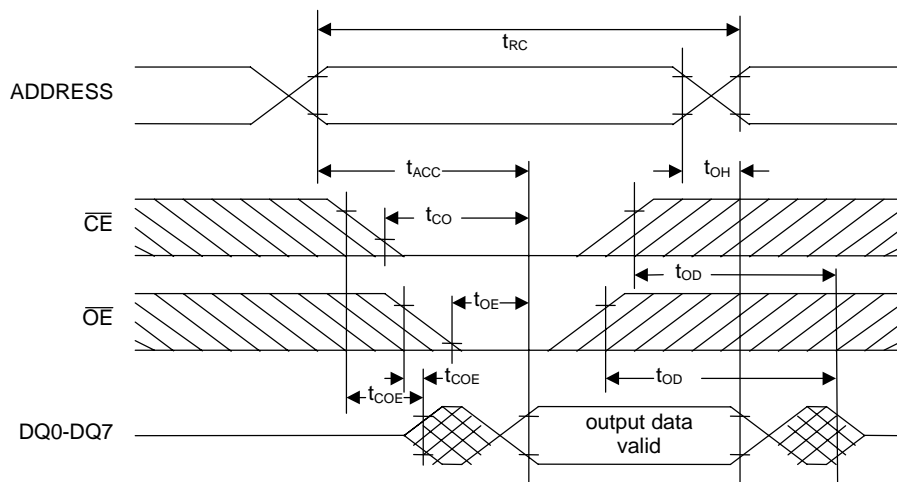


See Note 9

## MEMORY WRITE CYCLE TIMING, WRITE ENABLE CONTROLLED Figure 5

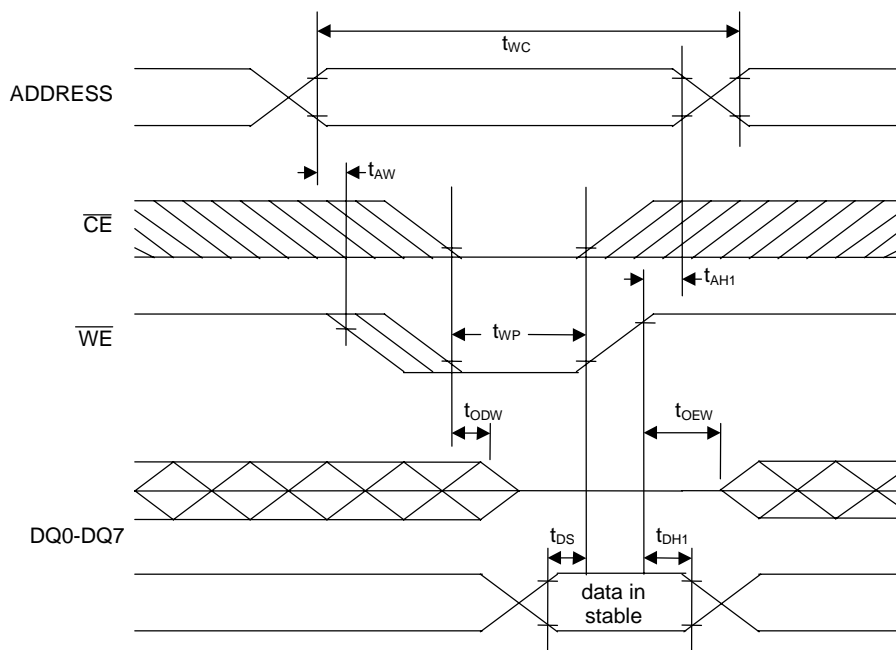


See Notes 5, 6, 8, 10, 11, 12, and 13

# MEMORY WRITE CYCLE TIMING, CHIP ENABLE CONTROLLED Figure 6

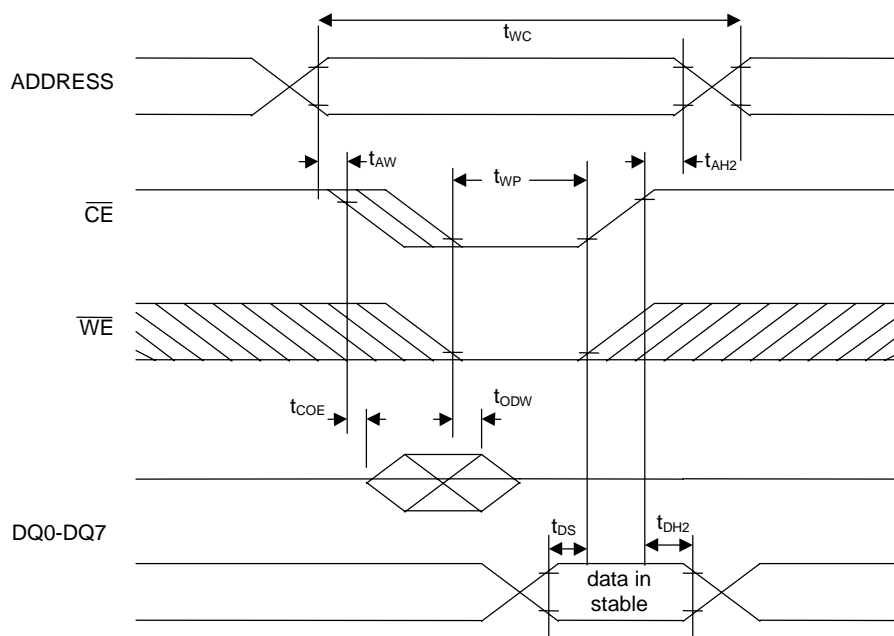



See Notes 5, 7, 8, 10, 11, 12, and 13

## READ CYCLE TO PHANTOM CLOCK Figure 7

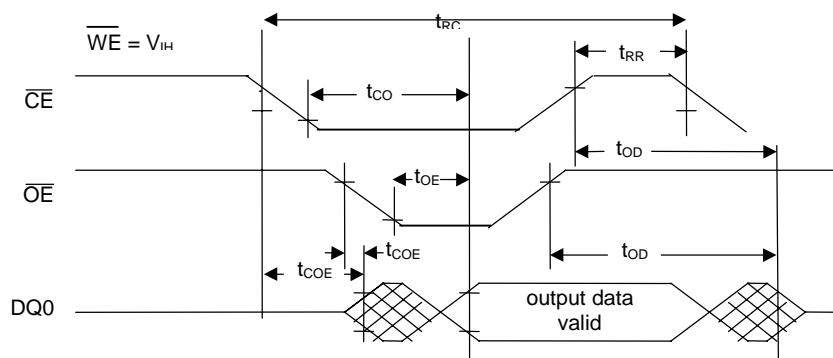

## WRITE CYCLE TO PHANTOM CLOCK Figure 8

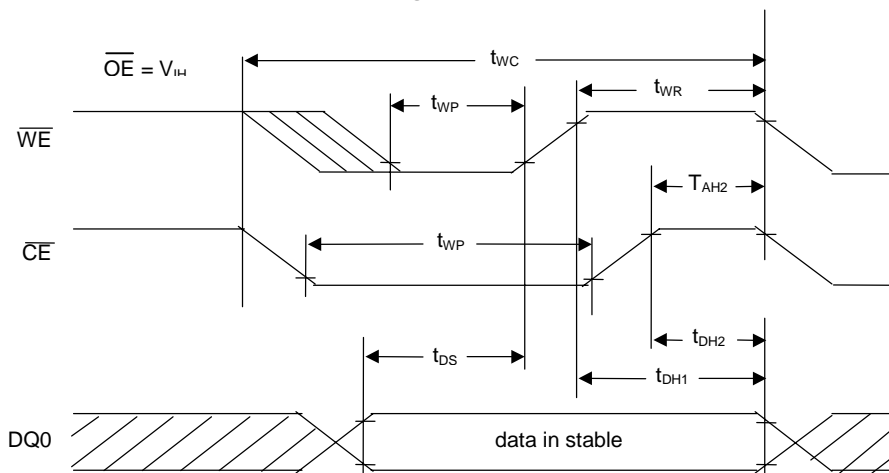

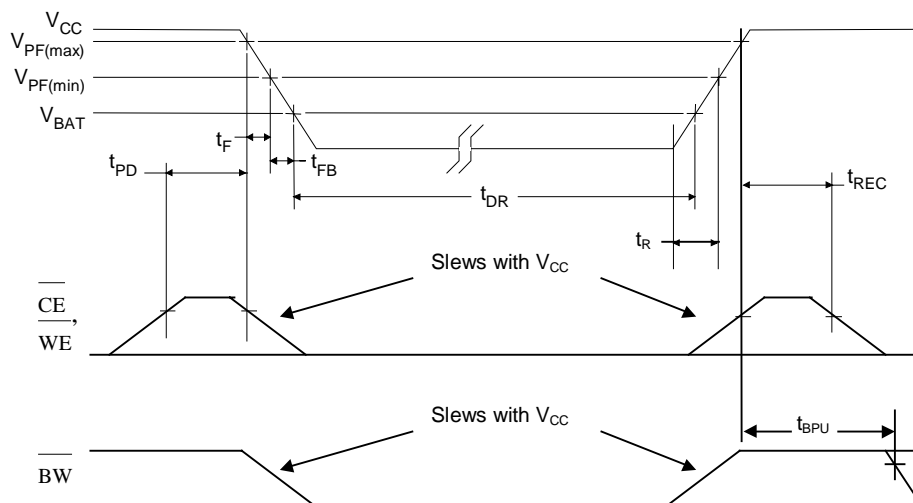**POWER UP/DOWN WAVEFORM TIMING** Figure 9

See Note 14

**POWER UP/DOWN CHARACTERISTICS**

(VCC = 5V±10%)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
$\overline{CE}$ and $\overline{WE}$ at $V_{IH}$ Before Power Down	$t_{PD}$	0			$\mu S$	
$V_{CC}$ Fall Time: $V_{PF(max)}$ to $V_{PF(min)}$	$t_F$	300			$\mu S$	
$V_{CC}$ Fall Time: $V_{PF(min)}$ to $V_{BAT}$	$t_{FB}$	10			$\mu S$	
$V_{CC}$ Rise Time: 0V to $V_{PF(min)}$	$t_R$	150			$\mu S$	
$V_{CC}$ Valid to End of Write Protection	$t_{REC}$			125	mS	
$V_{CC}$ Valid to $\overline{BW}$ Valid	$t_{BPU}$			1	Sec	3


(TA = 25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Expected Data Retention Time (Oscillator On)	$t_{DR}$	10			years	4

**WARNING:**

Under no circumstances are negative undershoots, of any amplitude, allowed when device is in battery backup mode.

## BATTERY WARNING DETECTION Figure 10

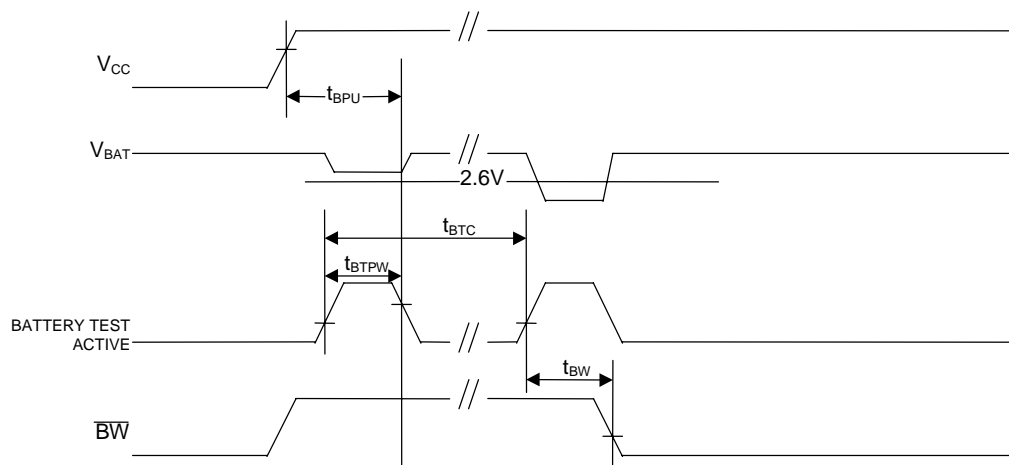

See Note 3

### BATTERY WARNING TIMING

(0°C to 70°C;  $V_{CC} = 5.0V \pm 10\%$ )

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Battery Test Cycle	$t_{BTC}$		24		hr	
Battery Test Pulse Width	$t_{BTPW}$			1	Sec	
Battery Test to $\overline{BW}$ Active	$t_{BW}$			1	Sec	
$V_{CC}$ Valid to $\overline{BW}$ Valid	$t_{BPU}$			1	Sec	3

### AC TEST CONDITIONS

Output Load: 100 pF + 1 TTL Gate

Input Pulse Levels: 0.0V to 3.0V

Timing Measurement Reference Levels:

Input: 1.5V


Output: 1.5V

Input Pulse Rise and Fall Times: 5 nS


**NOTES:**

1. Voltage referenced to ground.
2. These parameters are sampled with a 50 pF load and are not 100% tested.
3.  $\overline{BW}$  is an open drain output and, as such, cannot source current. An external pullup resistor should be connected to this pin for proper operation.  $\overline{BW}$  can sink 10 mA.
4. The DS3800 Battery Cap is a one time use part, but can be removed and replaced. By Design, removal of a DS3800 will mechanically damage the Battery Cap which eliminates the accidental use of a previously attached and possibly low capacity Battery Cap.
5.  $t_{WP}$  specified as the logical AND of  $\overline{CE}$  and  $\overline{WE}$ ,  $t_{WP}$  is measured from the latter of  $\overline{CE}$  or  $\overline{WE}$  going low to the earlier of  $\overline{CE}$  or  $\overline{WE}$  going high.
6.  $T_{AH1}$ ,  $t_{DH1}$  are measured from  $\overline{WE}$  going high..
7.  $T_{AH2}$ ,  $t_{DH2}$  are measured from  $\overline{CE}$  going high.
8.  $t_{DS}$  is measured from the earlier of  $\overline{CE}$  or  $\overline{WE}$  going high.
9.  $\overline{WE}$  is high for a read cycle.
10.  $\overline{OE} = V_{IH}$  or  $V_{IL}$ . If  $\overline{OE} = V_{IH}$  during write cycle, the output buffers remain in a high impedance state.
11. If the  $\overline{CE}$  low transition occurs simultaneously with or later than the  $\overline{WE}$  low transition in a write enable controlled write cycle, the output buffers remain in a high impedance state during this period.
12. If the  $\overline{CE}$  high transition occurs prior to or simultaneously with the  $\overline{WE}$  high transition, the output buffers remain in a high impedance state during this period.
13. If  $\overline{WE}$  is low or the  $\overline{WE}$  low transition occurs prior to or simultaneously with the  $\overline{CE}$  low transition, the output buffers remain in a high impedance state during this period.
14. In a power down condition, the voltage on any pin may not exceed the voltage on  $V_{CC}$ .

# DS1254 PACKAGE DIMENSIONS

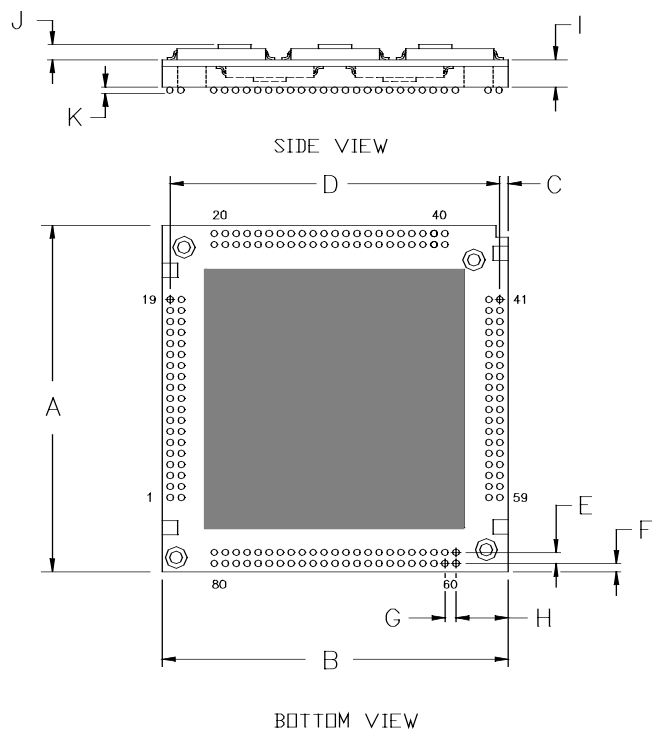

		Min	Max
A	in	1.570	1.580
	mm	39.88	40.13
B	in	1.570	1.580
	mm	39.88	40.13
C	in	0.033	0.043
	mm	0.84	1.09
D	in	1.497	1.503
	mm	38.02	38.18
E	in	0.047	0.053
	mm	1.19	1.35
F	in	0.033	0.043
	mm	0.84	1.09
G	in	0.047	0.053
	mm	1.19	1.35
H	in	0.234	0.240
	mm	5.94	6.10
I	in	0.125	0.135
	mm	3.10	3.43
J	in	-	?
	mm	-	?
K	in	0.025	0.030
	mm	0.64	0.76

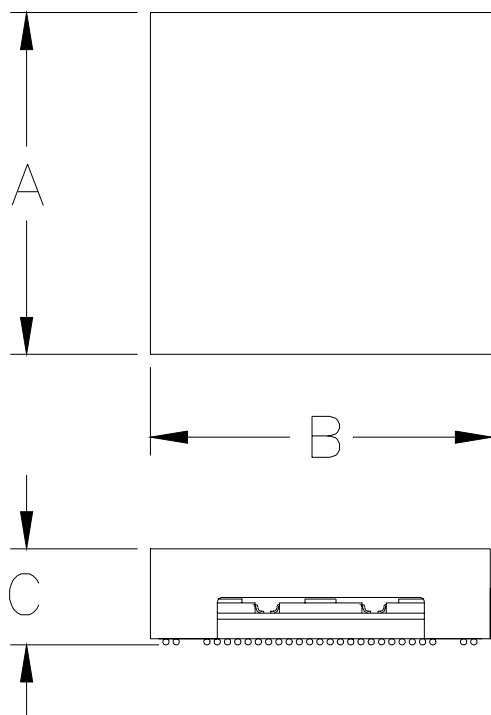
**DS1254 PACKAGE DIMENSIONS (WITH ATTACHED DS3800 BATTERY CAP)**

		Min	Max
A	in	1.656	1.668
	mm	42.06	42.37
B	in	1.656	1.668
	mm	42.06	42.37
C	in	-	0.485
	mm	-	12.32



## DS1254 RECOMMENDED LAND PATTERN (with overlaid Package Outline)

The DS1254 ball grid array is a subset of the industry-standard 40 mm BGA format, with all balls on a 50-mil grid. Corner balls have been removed to provide space for the electrical and mechanical interface features that facilitate attachment of the DS3800 Battery Cap.

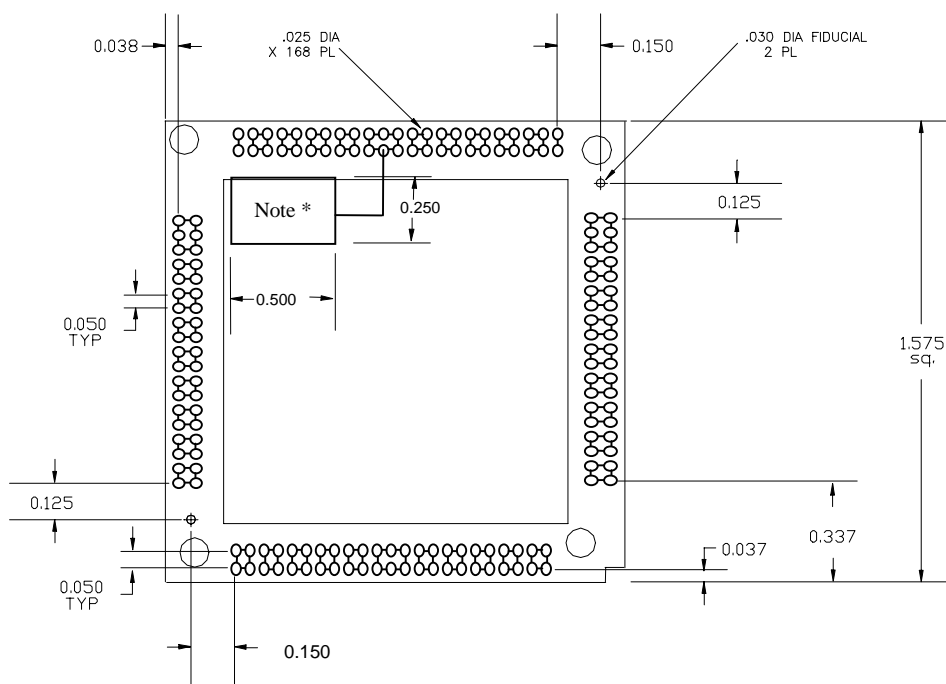

\* Note: Ground shield to isolate RTC XTAL from EMI