




Data Sheet



Product Category: RF SAW Filter

Part Number	Package	Application	Last Modified
802-RF412.5M-A	3.0 x 3.0 SMD	CDMA450	Jan. 01, 2007

TYPE :
CDMA450, RF-Tx SAW Filter





PART NUMBER :
802-RF412.5M-A

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	Condition	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	-	412.5	-	MHz
Maximum Insertion Loss	410.0~415.0MHz	-	2.5	3.2	dB
Stop Band Attenuation:	0.3~ 400.0 MHz	23	26	-	dB
	420.0~ 425.0 MHz	30	48	-	
	425.0~ 1700.0MHz	20	27	-	
	1700~ 2000.0 MHz	15	22	-	
Source Impedance (single ended)*	-	-	50	-	ohm
Load Impedance (single ended)*	-	-	50	-	ohm
VSWR	410.0~ 415.0MHz	-	1.3	2.0	-
Maximum Input Power	-	-	-	30	dBm
Operating Temperature	-	-30	-	+80	°C


* No Matching Network

PACKAGE OUTLINE (mm)

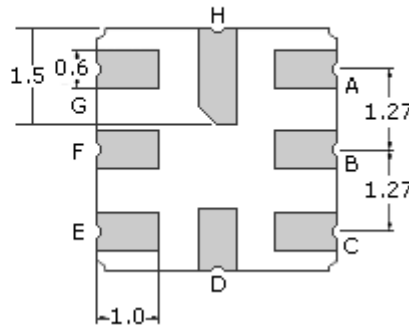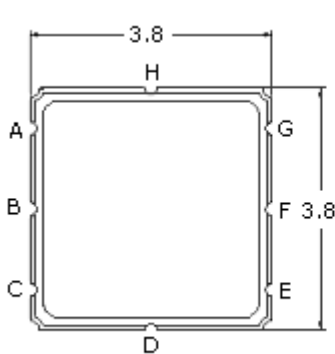


PIN LAYOUT	
A	Ground
B	Out
C	Ground
D	Ground
E	In
F	Ground


TEST FIXTURE

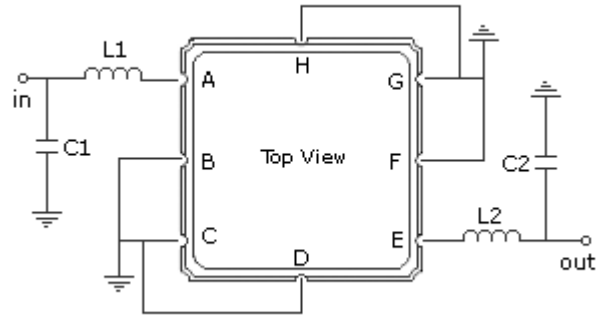

Source/Load Impedance = 50 ohms

FREQUENCY RESPONSE

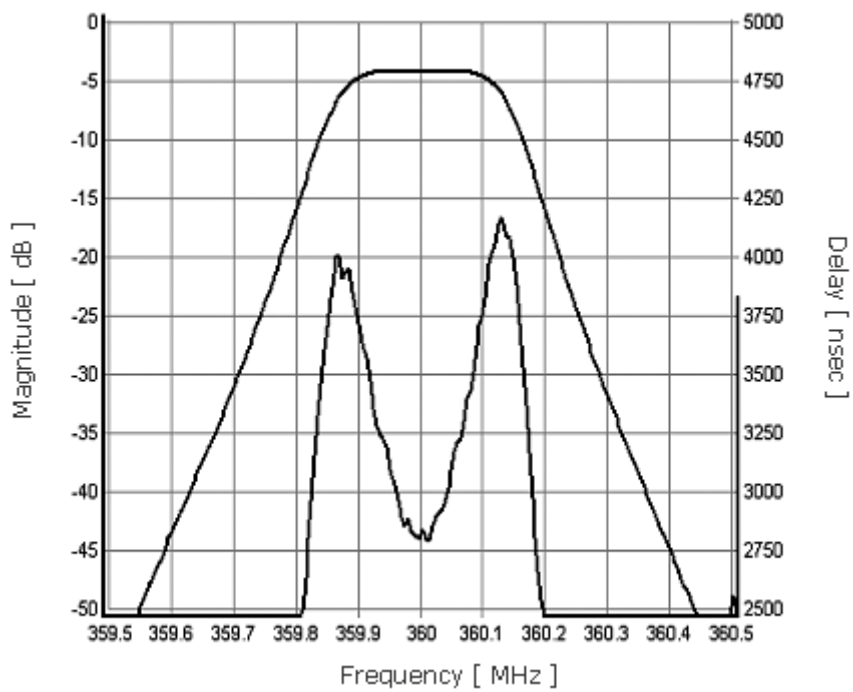

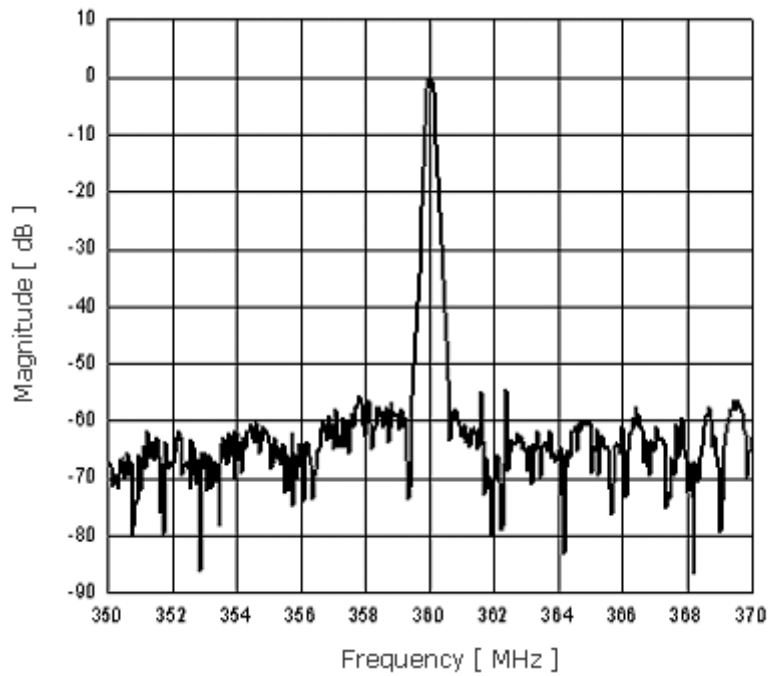

Oscilent Corporation - CALL **949.252.0522**

Part No.: [802-RF412.5M-A](#)

18195 East McDermott Street , Building D , Irvine , CA 92614 , USA
Fax: 949.252.0599 , E-Mail: Sales@Oscilent.com