

TOSHIBA TRANSISTOR SILICON-GERMANIUM NPN EPITAXIAL PLANER TYPE

MT4S200U



UHF-SHF Low Noise Amplifier Application

Unit: mm

FEATURES

- Low Noise Figure :NF=1.7dB (@f=5.8GHz)
- High Gain:|S21e|^2=9.5dB (@f=5.8GHz)

Marking

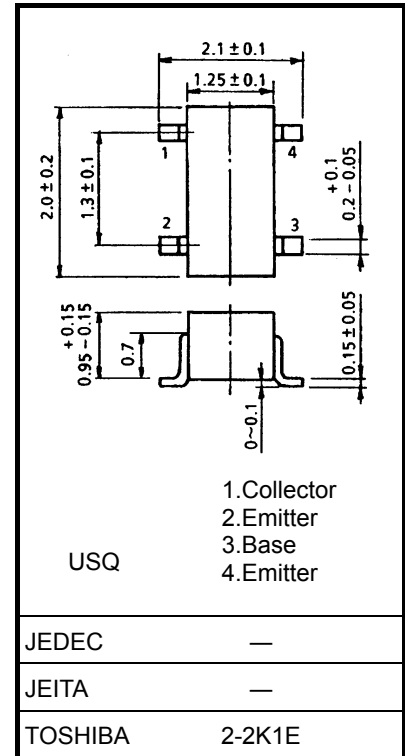

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Collector-Base voltage	V _{CBO}	8	V
Collector-Emitter voltage	V _{CEO}	4	V
Emitter-Base voltage	V _{EBO}	1.2	V
Collector-Current	I _C	35	mA
Base-Current	I _B	5	mA
Collector Power dissipation	P _c	100	mW
Collector Power dissipation	P _{C(Notes1)}	140	mW
Junction temperature	T _j	150	°C
Storage temperature Range	T _{stg}	-55~150	°C

Note1 : Ta=25degC (When mounted on a 1.6mm(t) glass epoxy PCB)

Weight: 0.006 g (typ.)

Microwave Characteristics (Ta = 25°C)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Transition Frequency	f_T	$V_{CE}=3V, I_C=15mA$	—	30	—	GHz
Insertion Gain	$ S_{21e} ^2(1)$	$V_{CE}=3V, I_C=15mA, f=2GHz$	15.0	17.5	—	dB
	$ S_{21e} ^2(2)$	$V_{CE}=3V, I_C=15mA, f=5.8GHz$	—	9.5	—	dB
Noise Figure	NF(1)	$V_{CE}=3V, I_C=5mA, f=2GHz$	—	0.75	1.0	dB
	NF(2)	$V_{CE}=3V, I_C=5mA, f=5.8GHz$	—	1.7	—	dB

Electrical Characteristics (Ta = 25°C)







Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector Cut-off Current	I_{CBO}	$V_{CB}=8V, I_E=0$	—	—	1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=1V, I_C=0$	—	—	1	μA
DC Current Gain	hFE	$V_{CE}=3V, I_C=15mA$	100	—	260	-
Output Capacitance	C_{ob}	$V_{CB}=3V, I_E=0, f=1MHz$	—	0.25	0.5	pF
Reverse Transfer Capacitance	C_{re}	$V_{CB}=3V, I_E=0, f=1MHz$ (Note 1)	—	0.074	0.18	pF



Note 1: C_{re} is measured by 3 terminal method with capacitance bridge.

Caution:


This device is sensitive to electrostatic discharge due to applied the high frequency transistor process of $f_T=60GHz$ class is used for this product.

Please make enough tool and equipment earthed when you handle.

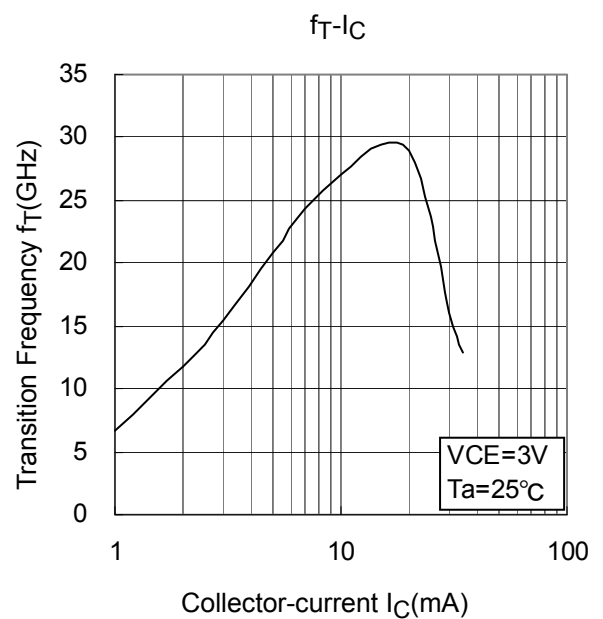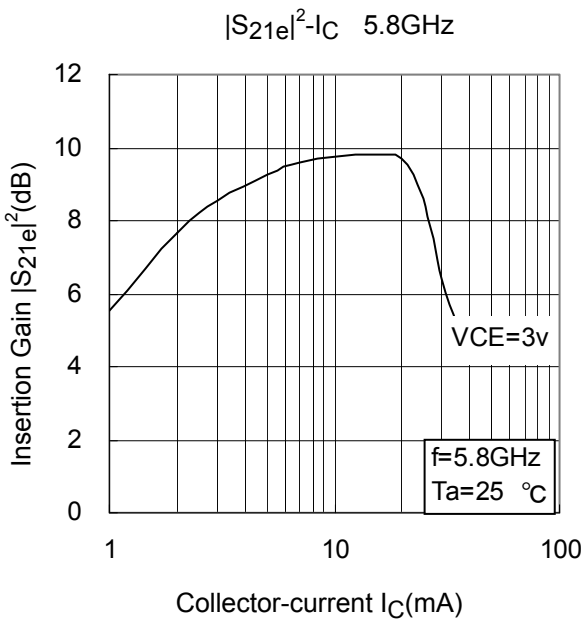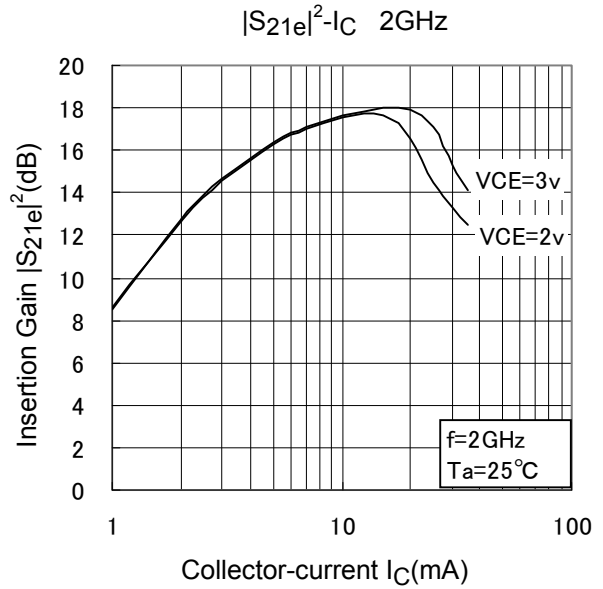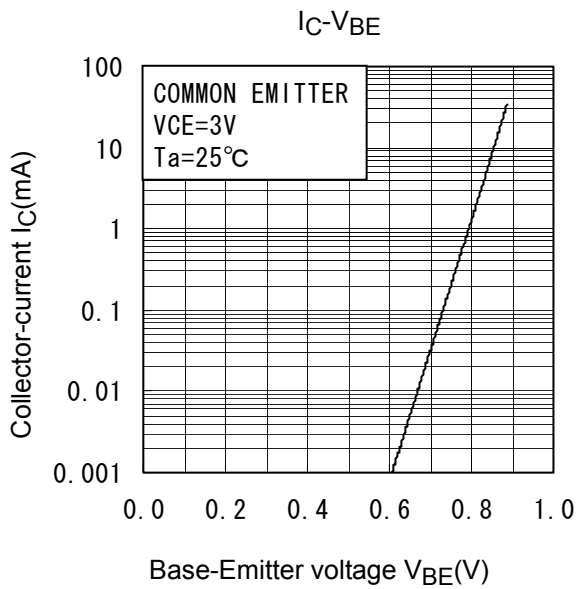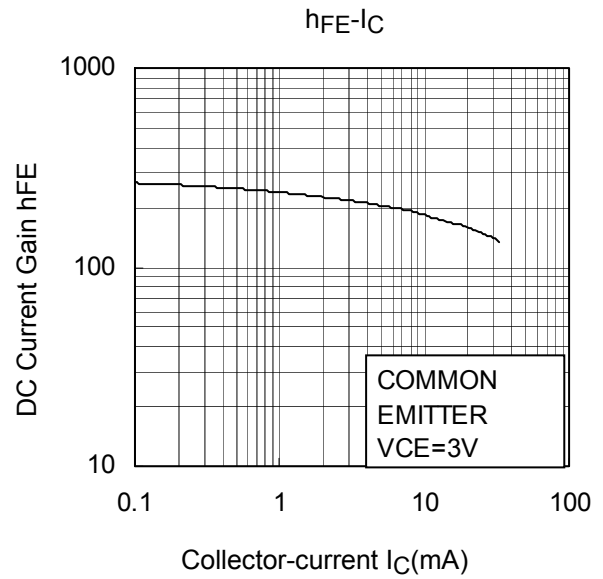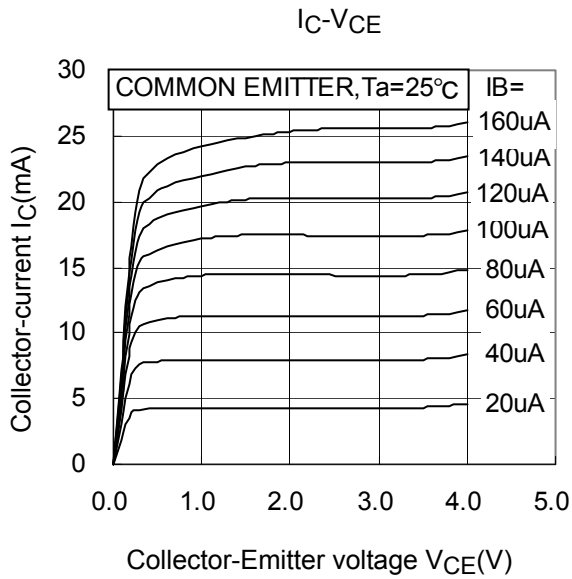


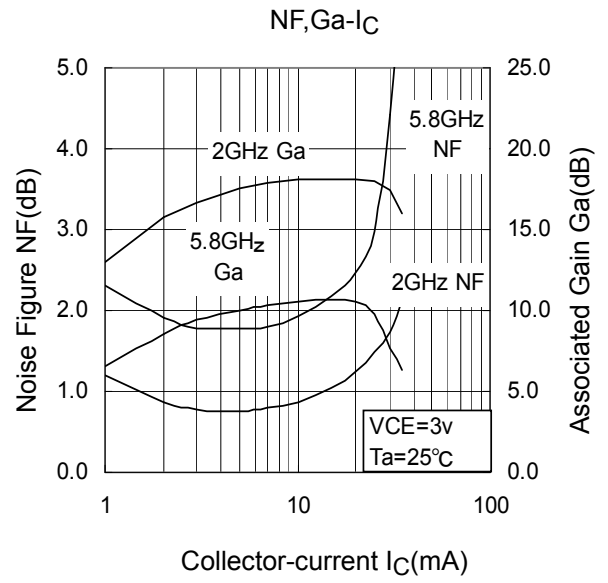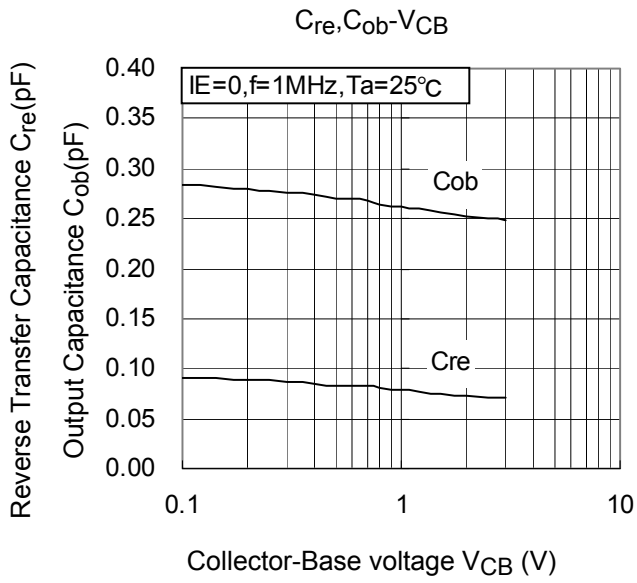


Output Power vs Input Power

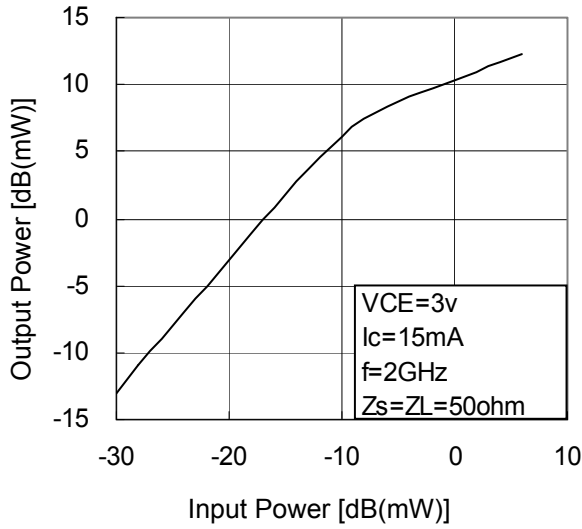


Output Power vs Input Power

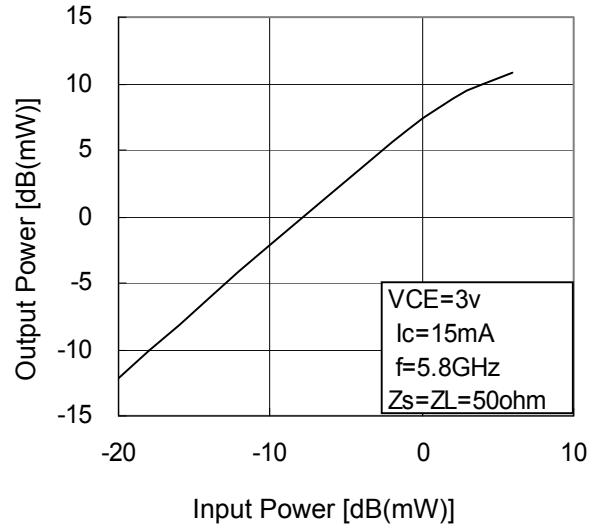

IM3 (2GHz)

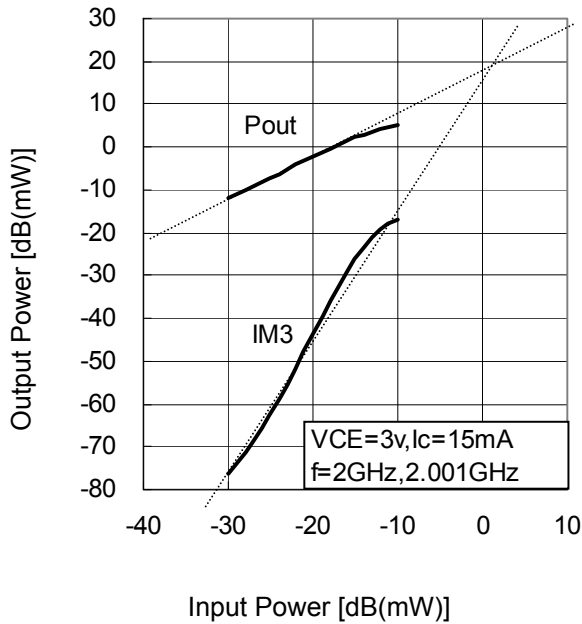

IM3 (5.8GHz)

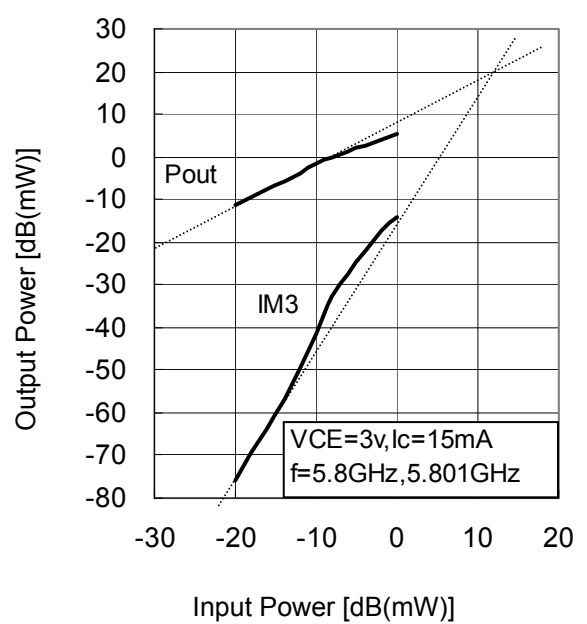

RESTRICTIONS ON PRODUCT USE

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.