

Agilent N9201A Array Structure Parametric Test Option

Technical Overview



Introduction

The decreasing size of features on integrated circuits (45 nm and smaller) is driving the need for new parametric test capabilities. These capabilities must accommodate the advanced test structures developed for fast yield ramp up in process integration as well as process monitoring in semiconductor manufacturing.

High-throughput measurement of high-volume parametric data is required to shorten the time for ramping up the process yield. This is accomplished by statistically analyzing and correcting the cause of wide range of process performance variations across a 300 mm wafer. Advanced test structures, addressable array test structures that contain address decoder circuitry, and a large number of test array elements with fewer probing pads and silicon area have been developed by major semiconductor manufacturers for this purpose.

The Agilent N9201A Parametric Test Option offers high throughput parametric measurement capability for a variety of addressable array test structures (e.g. passive array, active array and clocked latched active array) with synchronized mixed operation of DC SMUs and digital outputs. Digital outputs (parallel, serial, or clock signals) are used for the address decoder that is built into addressable array test structures. This allows the selection of the specific array element to be measured. DC SMUs measure the DC voltage and current parameters of selected array elements.

The DC power source is used for applying the power supply voltage (V_{dd}) to the address decoder logic circuitry that is built-in the addressable array test structures.

The N9201A is able to provide a maximum of 48 signal lines using the extended path ports of the 4070/4080 test head. This can be any combination of available SMUs, digital outputs, and DC power source outputs. The signals pass through the 4070/4080 test head down to the probe card.

The N9201A is controlled by SPECS (Semiconductor Process Evaluation Core Software), a test shell environment for the 4070 Series and 4080 Series. The N9201A can be provided as an upgrade for existing 4070 Series and 4080 Series users.



Measurement functions

DC current, DC voltage, and digital output

DC measurement

Spot and sweep

Measurement unit:* High speed medium power SMU (MPSMU); 8 SMU minimum configuration; SMUs may be added in increments of one up to a maximum of 40 SMUs

*Note: High Speed MPSMU specification is specified at the connectors of the equipment's front panel

Range of operation: -42 V to 42 V; -200 mA to 200 mA

Minimum resolution: 100 μ V; 5 pA

Maximum voltage between common and ground: \pm 42 V

Ground unit (GNDU) specification

Output voltage: 0 V \pm 100 μ V

Maximum sink current: 0.5 A

Output terminal/connection:

Triaxial connector, Kelvin (remote sensing)

Voltage range, resolution and accuracy

Voltage range	Force resolution	Measure resolution	Force accuracy ¹	Measure accuracy ²	Maximum current
\pm 2 V	100 μ V	100 μ V	\pm (0.03% + 900 μ V)	\pm (0.03% + 700 μ V)	200 mA
\pm 20 V	1 mV	1 mV	\pm (0.03% + 4 mV)	\pm (0.03% + 4 mV)	200 mA
\pm 40 V	2 mV	2 mV	\pm (0.03% + 7 mV)	\pm (0.03% + 8 mV)	²
\pm 100 V	5 mV	5 mV	\pm (0.04% + 15 mV)	\pm (0.03% + 20 mV)	³

¹ \pm (% of output/measurement value + offset voltage)

² 200 mA ($V_{out} \leq 20$ V), 50 mA (20 V $< V_{out} \leq 40$ V), V_{out} is the output voltage in volts.

³ 200 mA ($V_{out} \leq 20$ V), 50mA (20 V $< V_{out} \leq 40$ V), 20 mA (40 V $< V_{out} \leq 42$ V). V_{out} is the output voltage in volts.

Current range, resolution and accuracy

Current range	Force resolution	Measure resolution	Force accuracy ¹	Measure accuracy ²	Maximum voltage
\pm 100 nA	5 pA	5 pA	\pm (0.12% + 50 pA + 200 fA x V_o)	\pm (0.1% + 30 pA + 200 fA x V_o)	42 V
\pm 1 μ A	50 pA	50 pA	\pm (0.12% + 400 pA + 2 pA x V_o)	\pm (0.1% + 200 pA + 2 pA x V_o)	42 V
\pm 10 μ A	500 pA	500 pA	\pm (0.12% + 5 nA + 20 pA x V_o)	\pm (0.1% + 3 nA + 20 pA x V_o)	42 V
\pm 100 μ A	5 nA	5 nA	\pm (0.12% + 40 nA + 200 pA x V_o)	\pm (0.1% + 20 nA + 200 pA x V_o)	42 V
\pm 1 mA	50 nA	50 nA	\pm (0.12% + 500 nA + 2 nA x V_o)	\pm (0.1% + 300 nA + 2 nA x V_o)	42 V
\pm 10 mA	500 nA	500 nA	\pm (0.12% + 4 μ A + 20 nA x V_o)	\pm (0.1% + 2 μ A + 20 nA x V_o)	42 V
\pm 100 mA	5 μ A	5 μ A	\pm (0.12% + 50 μ A + 200 nA x V_o)	\pm (0.1% + 30 μ A + 200 nA x V_o)	²
\pm 200 mA	10 μ A	10 μ A	\pm (0.12% + 100 μ A + 400 nA x V_o)	\pm (0.1% + 60 μ A + 400 nA x V_o)	³

¹ \pm (% of output/measurement value + offset current A (fixed part determined by the output/measurement range + the proportional part that is multiplied by V_o))

² 42 V ($I_o \leq 20$ mA), 40 V (20 mA $< I_o \leq 50$ mA), 20 V (50 mA $< I_o \leq 100$ mA), I_o is the output current in Amps.

³ 42 V ($I_o \leq 20$ mA), 40 V (20 mA $< I_o \leq 50$ mA), 20 V (50 mA $< I_o \leq 200$ mA), I_o is the output current in Amps.

Digital output

Digital output characteristics:

16 digital output lines maximum when the N9201A has 8 or less SMUs; 32 digital output lines maximum when the N9201A has more than 8 SMUs

Output voltage:

High voltage: 0.3 V to 8.0 V

Low voltage: 0.0 V

Maximum output current: \pm 64 mA

Minimum state transition time: 20 μ s

DC power source**

1 channel and GND

Output rating: 0.03 V to + 10.25 V

Programming accuracy:

Voltage: 0.1% \pm 20 mV

Current limit: 0.15% \pm 20 mA

**Note: DC power source specification is specified at the connectors of the equipment's front panel

General specifications

Accuracy is specified at

Temperature: 23°C ± 5°C

Humidity: 5% to 70% RH

Warm up time: at least 40 minutes.

Self-calibration: Within one hour after calibration

Integration time: Medium or long

Operation and storage

Operating temperature range:
5°C to 30°C

Operating humidity range:
5% to 70% (noncondensing)

Storage temperature
-20°C to 50°C
(< 80% RH, noncondensing)

Power requirements

Allowable voltage range at maximum current:

100 Vac – 120 Vac @ 20 A

200 Vac – 240 Vac @ 10 A

Regulatory and standards compliance

EMC:

EMC Directive 89/336/EEC,
93/68/EEC

IEC/EN61326-1

ICES-001

AS/NZS 2064.1

Safety:

Low voltage directive

73/23/EEC, 93/68/EEC

IEC/EN61010-1

CSA C22.2 No. 61010-1

Certification marking:

CW, c CSA us, C-tick,

ICES/NMB-001

Dimensions

System cabinet: 600 mm (W) by
1050 mm (D) by 1818 mm (H)

Weight

System cabinet: Approximately 360 kg
(including 40 SMUs, 32 digital outputs,
1 DC power source, and required
cables)

Recommended probers and probe cards*

Probers:


- ACCRETECH UF3000
- TEL P12XL

Probe cards:

- JEM (Japan electronic materials Co.)
- MJC (Micronics Japan Co.)
- K&S (Kulicke & Soffa Industries Inc.)
- FormFactor

* Please contact your local sales representative regarding the latest information on recommended probers and probe cards.

N9201A-to-4070/4080 Series connection capabilities

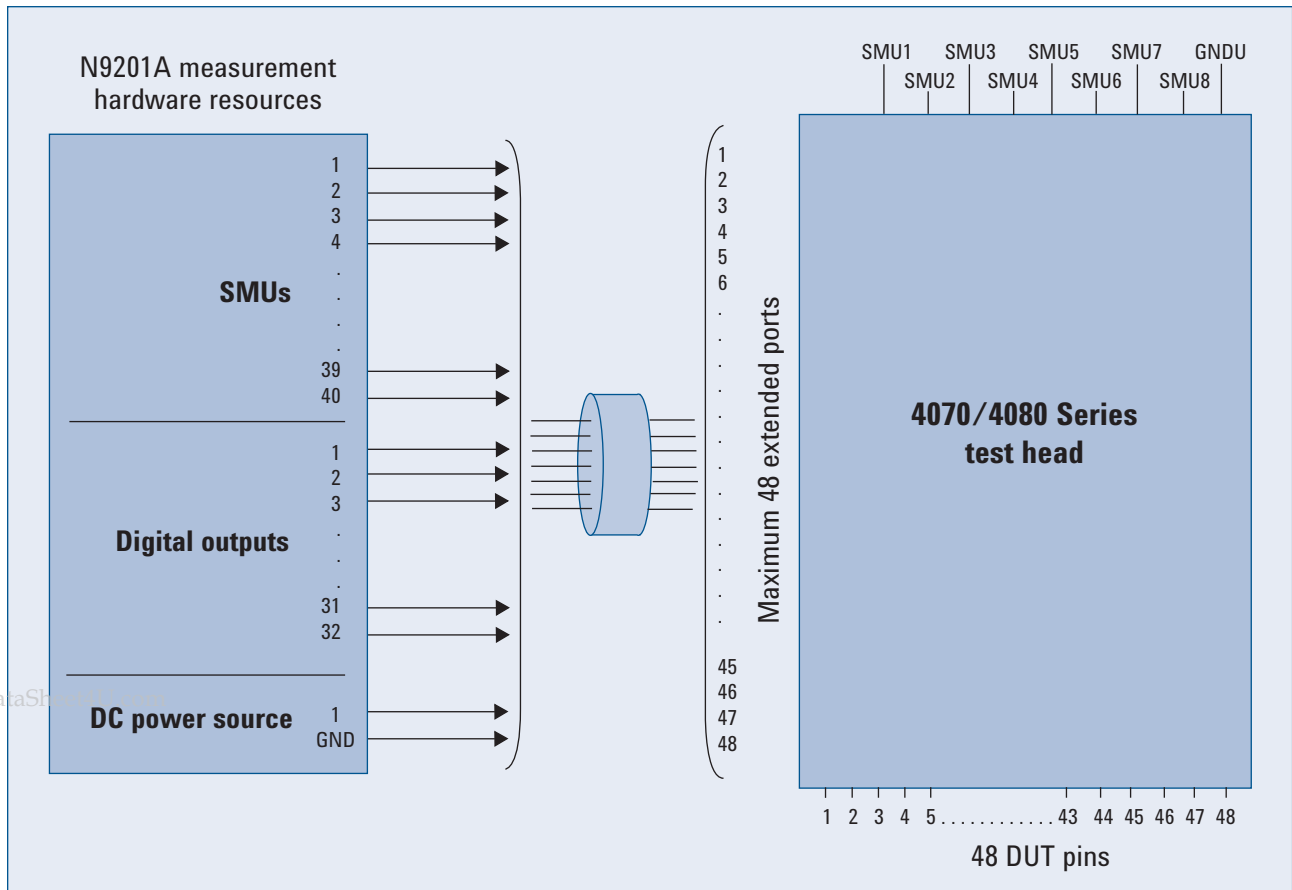

Web Resources

N9201A Web Site

Visit our N9201A web site for additional product information and literature.

www.agilent.com/see/N9201A



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: www.agilent.com/find/contactus

Americas

Canada	877 894 4414
Latin America	305 269 7500
United States	800 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	81 426 56 7832
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700* <small>*0.125 €/minute</small>
Germany	07031 464 6333** <small>**0.14 €/minute</small>
Ireland	1890 924 204
Israel	972 3 9288 504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: July 17, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2007, 2008
Printed in USA, August 8, 2008
5989-5747EN

