

## 2ch VOLTAGE DETECTOR

### ■ GENERAL DESCRIPTION

The NJU7710/11 is a 2ch low quiescent current voltage detector featuring high precision detection voltage.

The detection voltage is fixed internally with an accuracy of 1.0%.

NJU7710 is Nch. Open Drain and NJU7711 of output circuit form is a C-MOS output.

### ■ PACKAGE OUTLINE



NJU7710/11F




NJU7710/11F3

### ■ FEATURES



- High Precision detection Voltage  $\pm 1.0\%$
- Low Quiescent Current 0.8 $\mu$ A(per 1CH)
- Detection Voltage Range 1.3~6.0V(0.1V step)
- Output Circuit Form  
 NJU7710: Nch. Open Drain Type  
 NJU7711: C-MOS Output Type
- Package Outline MTP5 /SC88A

### ■ PIN CONFIGURATION

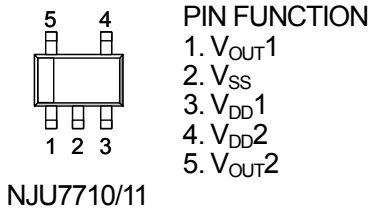

- PIN FUNCTION**
1.  $V_{OUT1}$
  2.  $V_{SS}$
  3.  $V_{DD1}$
  4.  $V_{DD2}$
  5.  $V_{OUT2}$

### ■ EQUIVALENT CIRCUIT

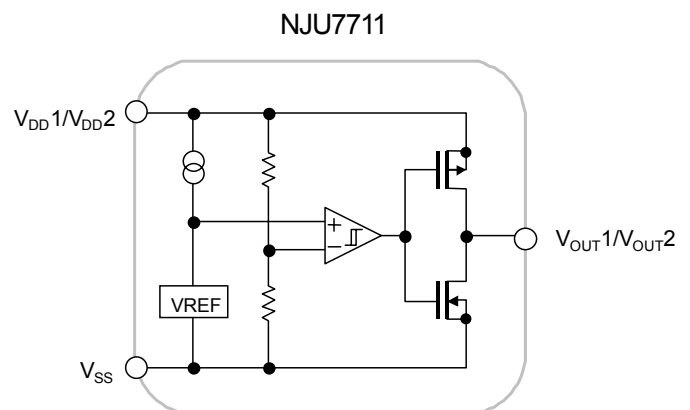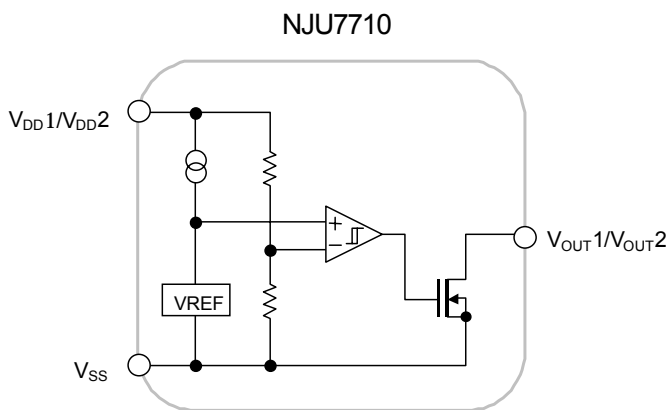

### ■ DETECTION VOLTAGERANK LIST

Device Name	Package	$V_{DET}$	
		CH1	CH2
NJU7710/11F4227	MTP5	4.2V	2.7V
NJU7710/11F0613		6.0V	1.3V
NJU7710/11F3-4227	SC88A	4.2V	2.7V
NJU7710/11F3-0613		6.0V	1.3V

# NJU7710/11

## ■ NJU7710

### ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V <sub>DD</sub>	+10	V
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3 ~ +10	V
Output Current	I <sub>OUT</sub>	50	mA
Power Dissipation	P <sub>D</sub>	200(MTP5)	mW
		250(SC88A(*note1))	
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(\*note1) On board, 50mm×50mm×1.6mm glass epoxy baseplate.

## ■ ELECTRICAL CHARACTERISTICS


(CH1/2 common characteristics, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Detection Voltage	V <sub>DET</sub>		-1.0%	-	+1.0%	V	
Hysteresis Voltage	V <sub>HYS</sub>		V <sub>DET</sub> ×0.03	V <sub>DET</sub> ×0.05	V <sub>DET</sub> ×0.08	V	
Quiescent Current	I <sub>SS</sub>	V <sub>DD</sub> =V <sub>DET</sub> +1V	V <sub>DET</sub> =1.3V~1.7V Version	-	0.5	1.0	uA
			V <sub>DET</sub> =1.8V~6.0V Version	-	0.8	1.6	uA
Output Current	I <sub>OUT</sub>	Nch, V <sub>DS</sub> =0.5V	V <sub>DD</sub> =1.2V	0.75	2.0	-	mA
			V <sub>DD</sub> =2.4V (≥2.7V Version)	4.5	7.0	-	mA
Output Leak Current	I <sub>LEAK</sub>	V <sub>DD</sub> =V <sub>OUT</sub> =9V	-	-	0.1	uA	
Detection Voltage Temperature Coefficient	ΔV <sub>DET</sub> /ΔTa	Ta=0 ~ +85°C	-	±100	-	ppm/°C	
Operating Voltage (*note 2)	V <sub>DD</sub>	R <sub>L</sub> =100kΩ	0.8	-	9	V	


(\*note 2): The minimum Operating Voltage(V<sub>OPL</sub>) indicates the same value of the output voltage(V<sub>OUT</sub>) on condition that V<sub>OUT</sub> becomes 10% or less of the input voltage(V<sub>DD</sub>).

## ■ TEST CIRCUIT

### ① COMMON TEST CIRCUIT

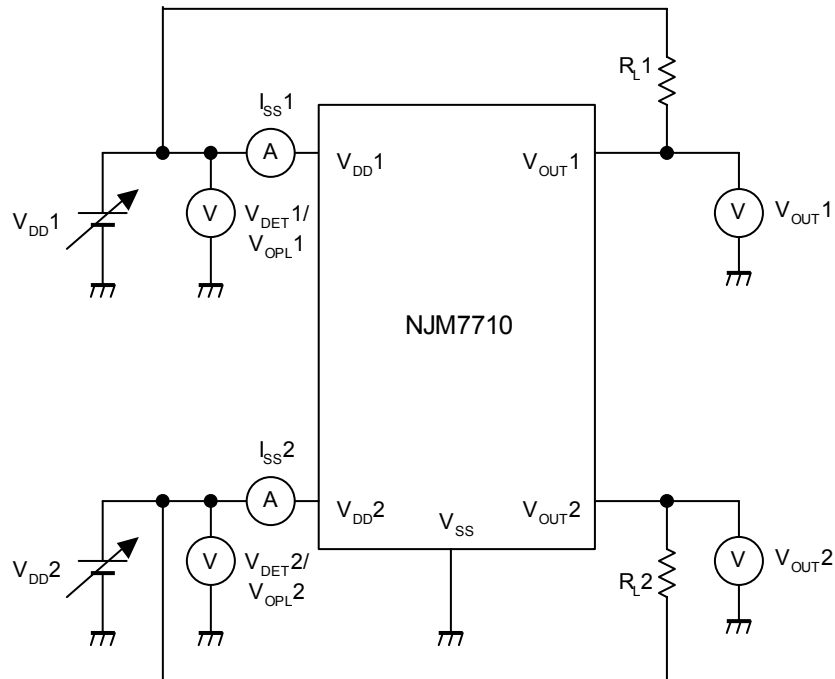


### ② Output Current/Output Leak Current TEST CIRCUIT

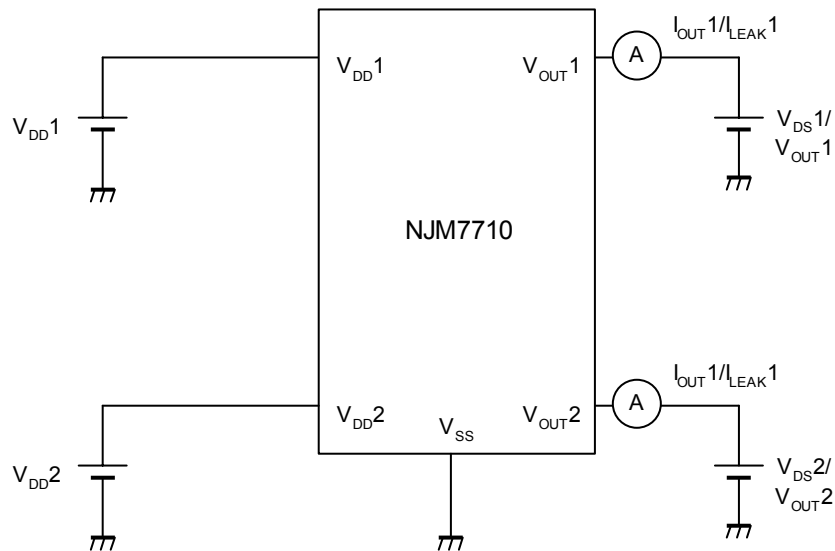


## ■ TYPICAL APPLICATION

① Power supply voltage supervision of two systems

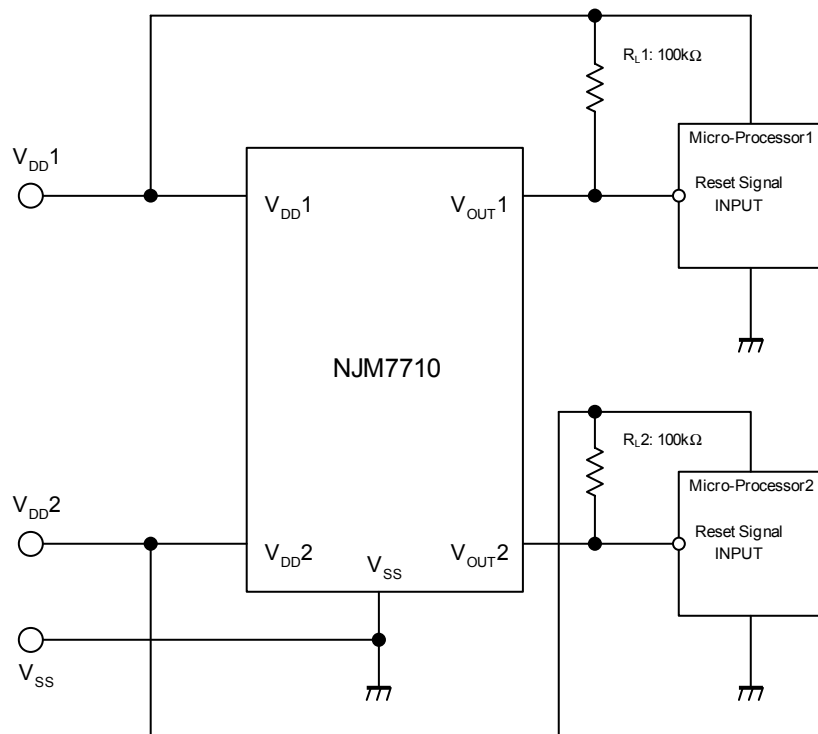

② Power supply voltage supervision of two systems  
(At the time of power source supply classified by micro-processor)

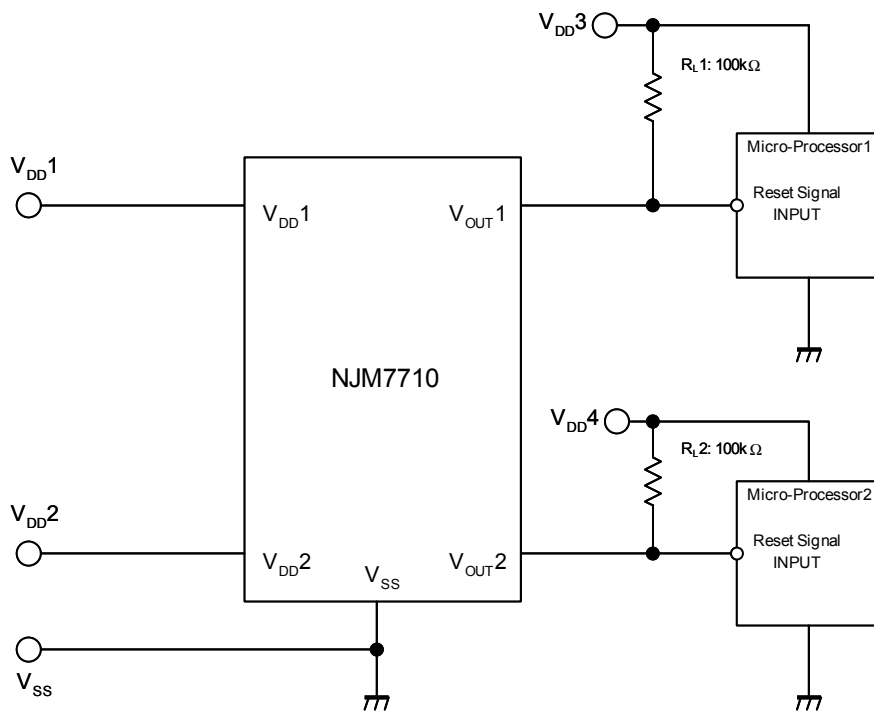

■ NJU7711

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V <sub>DD</sub>	+10	V
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3 ~ +10	V
Output Current	I <sub>OUT</sub>	50	mA
Power Dissipation	P <sub>D</sub>	200(MTP5)	mW
		250(SC88A(*note1))	
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(\*note1) On board, 50mm×50mm×1.6mm glass epoxy baseplate.

■ ELECTRICAL CHARACTERISTICS


(CH1/2 common characteristics. Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Detection Voltage	V <sub>DET</sub>		-1.0%	–	+1.0%	V	
Hysteresis Voltage	V <sub>HYS</sub>		V <sub>DET</sub> x0.03	V <sub>DET</sub> x0.05	V <sub>DET</sub> x0.08	V	
Quiescent Current	I <sub>SS</sub>	V <sub>DD</sub> =V <sub>DET</sub> +1V	V <sub>DET</sub> =1.3V~1.7V Version	–	0.5	1.0	uA
			V <sub>DET</sub> =1.8V~6V Version	–	0.8	1.6	uA
Output Current	I <sub>OUT</sub>	Nch, V <sub>DS</sub> =0.5V	V <sub>DD</sub> =1.2V	0.75	2.0	–	mA
			V <sub>DD</sub> =2.4V (≥2.7V Version)	4.5	7.0	–	mA
		Pch, V <sub>DS</sub> =0.5V	V <sub>DD</sub> =4.8V (≤3.9V Version)	2.0	3.5	–	mA
			V <sub>DD</sub> =6.0V (4V~5.6V Version)	2.5	4.0	–	mA
			V <sub>DD</sub> =8.4V (≥5.7V Version)	3.0	5.0	–	mA
Detection Voltage Temperature Coefficient	ΔV <sub>DET</sub> /ΔTa	Ta=0 ~ +85°C	–	±100	–	ppm/°C	
Operating Voltage (*note2)	V <sub>DD</sub>		0.8	–	9	V	


\*note 1 : The minimum Operating Voltage(V<sub>OPL</sub>) indicates the same value of the output voltage(V<sub>OUT</sub>) on condition that V<sub>OUT</sub> becomes 10% or less of the input voltage(V<sub>DD</sub>).

## ■ TEST CIRCUIT


### ① COMMON TEST CIRCUIT

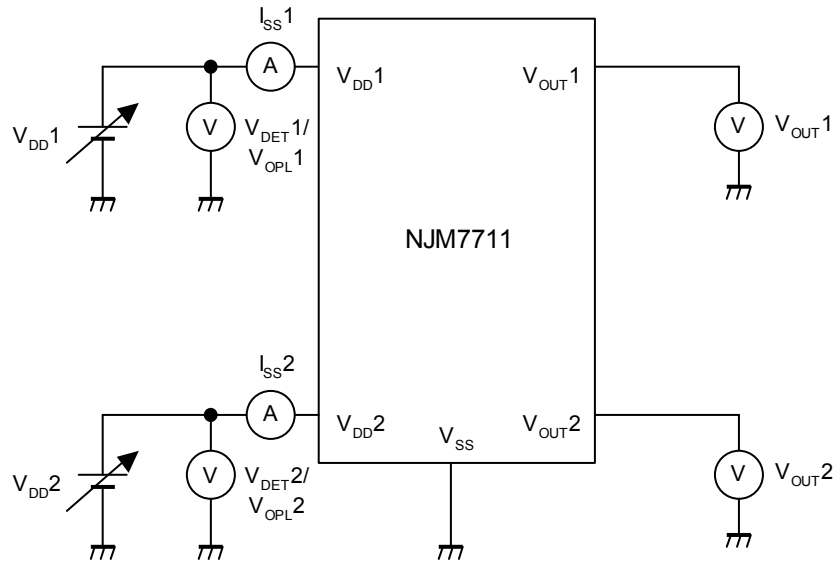


### ② Nch Output Current TEST CIRCUIT

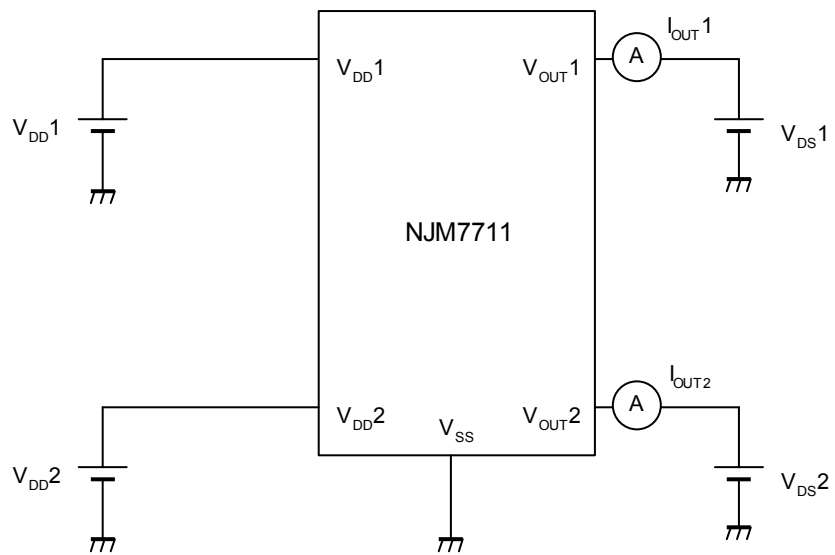

## ③ Pch Output Current TEST CIRCUIT

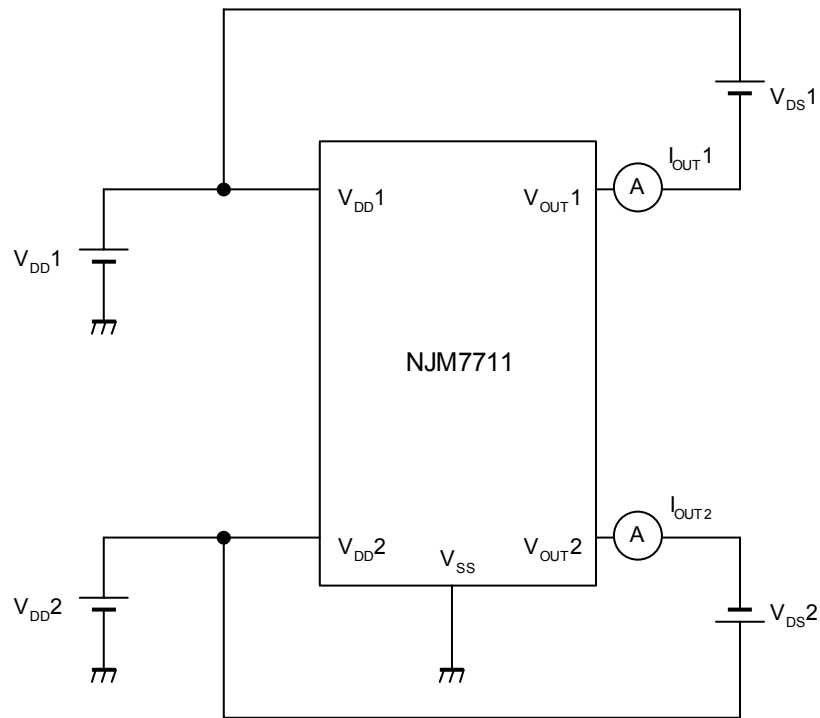


## ④ Minimum Operating Voltage TEST CIRCUIT

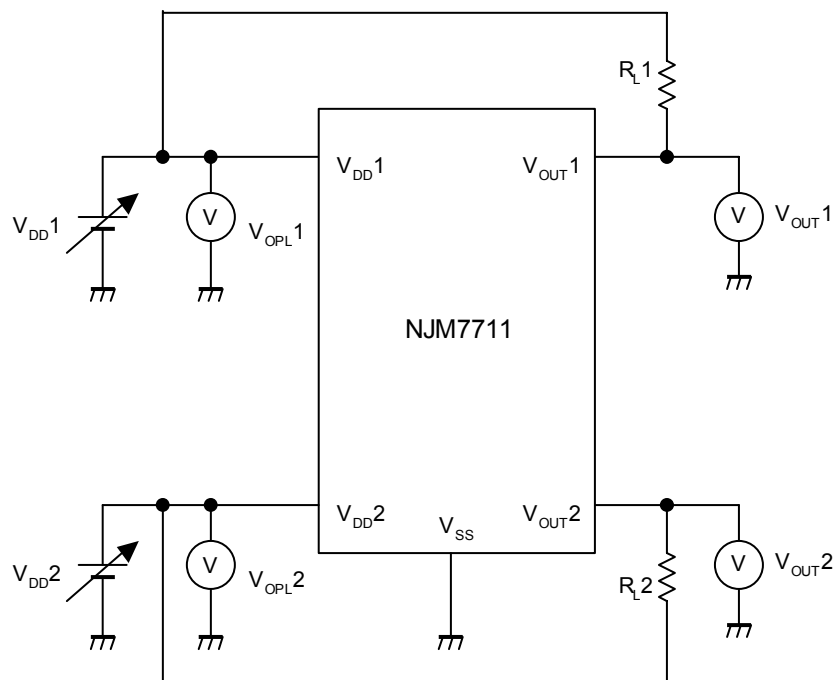

## ■ TYPICAL APPLICATION

Power supply voltage supervision of two systems

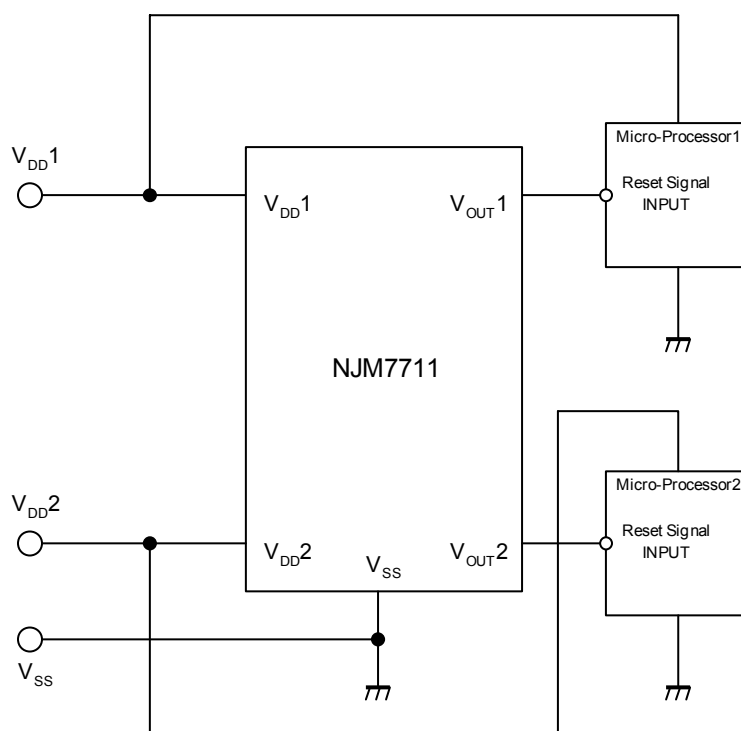

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.