




## PACKAGE OUTLINE

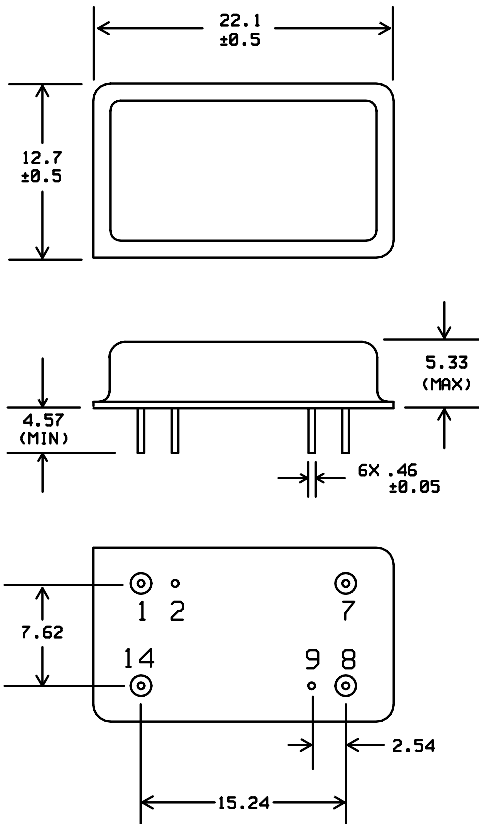


Units: mm

### Pin Configuration:

Input:	14
Input Return:	1
Output:	8
Output Return:	7
Ground:	2, 9

## MATCHING CIRCUIT

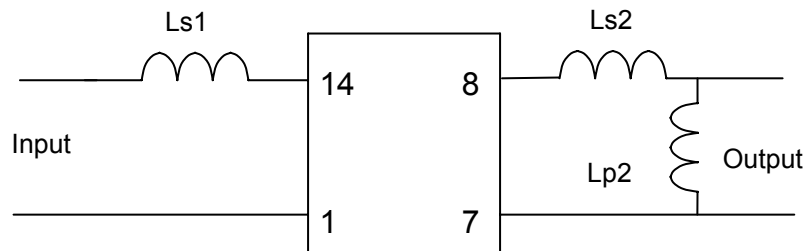

Component values:

$Ls1 = 330$  nH

(Minimum  $Q = 45$ )

$Ls2 = 357$  nH     $Lp2 = 68$  nH

### Notes

- 1: Recommend use of 2% tolerance components.
- 2: Optimum Values depend on board layout. Values intended as guide only.

ISO 9001  
Registered

Micro Networks

Worldwide Headquarters: 324 Clark Street Worcester, MA 01606. tel: 508-852-5400 fax: 508-852-8456  
European Sales Headquarters: Hertosingel 20 6214 AD Maastricht, Netherlands. tel: +31-43-32-70912 fax: +31-43-32-70715  
[www.micronetworks.com](http://www.micronetworks.com)