

DFC10 SERIES SINGLE OUTPUT


DESCRIPTION

The DFC10 Series provides power converter solutions to meet commercial and industrial requirements. With power densities above 11 watts per cubic inch (0.67 watts per cm³), overcurrent protection, and five-sided shielded case, the DFC10 meets the most rigorous needs in an industry standard case size. The 220KHz operating frequency of the DFC10 Series allows an increased power density while including adequate heat sinking and input/output filtering. This eliminates the need for external components in most applications. Full overload protection is provided by pulse-by-pulse current limiting.

FEATURES

- High Power Density, up to 11 Watts per Cubic Inch (0.67 watts per cm³)
- Efficiencies to 83% (Lower for 3.3V)
- Low Input to Output Capacitance
- 700V Isolation(1544V for 48V Converters)
- Continuous Overcurrent Protection
- 3.3Volt Output Available
- Five-Side Shielded Copper Case
- Extended Input Range (2:1)

| Selection Chart | | | | |
|---------------------|---------------------|-----|------------|-----------|
| Model | Input Range VDC (4) | | Output VDC | Output mA |
| | Min | Max | | |
| DFC10E12S3.3 | 9 | 18 | 3.33 | 2000 |
| DFC10E12S5 | 9 | 18 | 5 | 2000 |
| DFC10E12S12 | 9 | 18 | 12 | 900 |
| DFC10E12S15 | 9 | 18 | 15 | 700 |
| DFC10E24S3.3 | 18 | 36 | 3.33 | 2000 |
| DFC10E24S5 | 18 | 36 | 5 | 2000 |
| DFC10E24S12 | 18 | 36 | 12 | 900 |
| DFC10E24S15 | 18 | 36 | 15 | 700 |
| DFC10E48S3.3 | 36 | 72 | 3.33 | 2000 |
| DFC10E48S5 | 36 | 72 | 5 | 2000 |
| DFC10E48S12 | 36 | 72 | 12 | 900 |
| DFC10E48S15 | 36 | 72 | 15 | 700 |

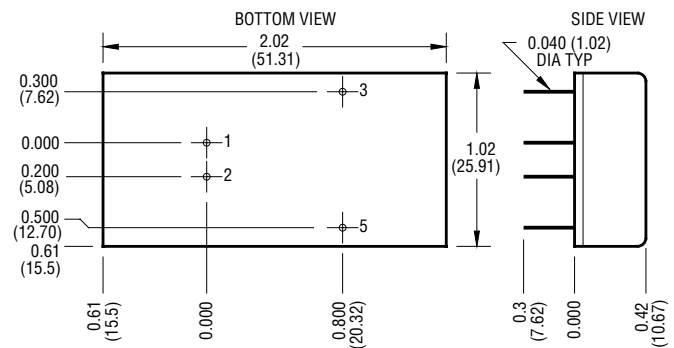

Mechanical tolerances unless otherwise noted:

X.XX dimensions: ±0.020 inches

X.XXX dimensions: ±0.005 inches

| General Specifications (1) | | | | |
|-------------------------------|-----|---------|--|----------|
| All Models | | | | Units |
| Isolation (2) | | | | |
| Isolation Voltage | | | | |
| Input to Output 12V, 24V | MIN | 700 | | VDC |
| Input to Output 48V | MIN | 1544 | | |
| 10 µA Leakage | | | | |
| Input to Output Capacitance | TYP | 400 | | pF |
| Environmental | | | | |
| Case Operating Range, Tc | MIN | -40 | | ° C |
| No Derating | MAX | 90 | | |
| Case Functional Range (3) | MIN | -50 | | ° C |
| | MAX | 100 | | |
| Storage Range | MIN | -55 | | ° C |
| | MAX | 105 | | |
| Thermal Impedance (4) | TYP | 15 | | ° C/Watt |
| General | | | | |
| MTBF (Calculated) | TYP | 800,000 | | HRS |
| Unit Weight | TYP | 1.0/28 | | oz/gm |
| Chassis Mounting Kit 12V, 24V | | CM2B2 | | |
| Chassis Mounting Kit 48V | | CM2A1 | | |

| Pin | Function |
|-----|----------|
| 1 | +INPUT |
| 2 | -INPUT |
| 3 | +OUT |
| 4 | NO PIN |
| 5 | -OUT |

NOTES

- (1) All parameters measured at Tc = 25°C, nominal input voltage and full rated load unless otherwise noted. Refer to the Technical Reference Section for the definition of terms, measurement circuits and other information.
- (2) The Case is tied to the -Input pin.
- (3) The functional temperature range is intended to give an additional data point for use in evaluating this power supply. At the low functional temperature the power supply will function with no side effects, however, sustained operation at the high functional temperature will reduce expected operational life. The data sheet specifications are not guaranteed beyond the case operating range.
- (4) The case thermal impedance is specified as the case temperature rise over ambient per package watt dissipated.

DFC10 SERIES – SINGLE OUTPUT

| Input Parameters (1) | | | | | | | | |
|------------------------------------------|---------|--------------|-------------|--------------|-------------|--------------|-------------|--------------------------|
| Model | | DFC10E12S3.3 | DFC10E12S5 | DFC10E12S12 | DFC10E12S15 | DFC10E24S3.3 | DFC10E24S5 | Units |
| Reflected Ripple (2) | TYP | 280 | 440 | | | 140 | 210 | mA_{PP} |
| | TYP | 90 | 145 | | | 45 | 70 | mA_{rms} |
| Input Current Full Load | TYP | 724 | 1070 | 1100 | 1060 | 344 | 500 | mA |
| | No Load | TYP | 7 | 12 | 15 | 7 | 7 | |
| Efficiency | TYP | 76 | 78 | 82 | 83 | 80 | 83 | % |
| Switching Frequency | TYP | 220 | | | | | | kHz |
| Maximum Input Overvoltage, 100ms Maximum | MAX | 24 | | | 45 | | | VDC |
| Turn-on Time, 1% Output Error | TYP | 10 | | | | | | ms |
| Model | | DFC10E24S12 | DFC10E24S15 | DFC10E48S3.3 | DFC10E48S5 | DFC10E48S12 | DFC10E48S15 | Units |
| Reflected Ripple (2) | TYP | 210 | | 100 | 150 | | | mA_{PP} |
| | TYP | 70 | | 35 | 50 | | | mA_{rms} |
| Input Current Full Load | TYP | 530 | 510 | 176 | 260 | 270 | 260 | mA |
| | No Load | TYP | 10 | 10 | 6 | 6 | 6 | |
| Efficiency | TYP | 85 | 86 | 78 | 81 | 83 | 84 | % |
| Switching Frequency | TYP | 220 | | | | | | kHz |
| Maximum Input Overvoltage, 100ms Maximum | MAX | 45 | | 85 | | | VDC | |

| Output Parameters (1) | | | | | | |
|---------------------------------------------------------|-----|----------------------------------------------|----------------------------------------|-------------------------------------------|-------------------------------------------|--------------------------|
| Model | | DFC10E12S3.3 DFC10E24S3.3 DFC10E48S3.3 | DFC10E12S5 DFC10E24S5 DFC10E48S5 | DFC10E12S12 DFC10E24S12 DFC10E48S12 | DFC10E12S15 DFC10E24S15 DFC10E48S15 | Units |
| Output Voltage | | 3.33 | 5 | 12 | 15 | VDC |
| Output Voltage Accuracy | MIN | 3.30 | 4.95 | 11.90 | 14.90 | VDC |
| | TYP | 3.33 | 5.00 | 12.00 | 15.00 | |
| | MAX | 3.36 | 5.05 | 12.10 | 15.10 | |
| Rated Load Range | MIN | 0.0 | 0.0 | 0.0 | 0.0 | A |
| | MAX | 2.0 | 2.0 | 0.9 | 0.7 | |
| Load Regulation 25% Max Load - Max Load | TYP | 0.1 | 0.1 | 0.2 | 0.2 | % |
| | MAX | 0.4 | 0.4 | 0.4 | 0.4 | |
| Line Regulation $V_{\text{in}} = \text{Min-Max VDC}$ | TYP | 0.5 | 0.01 | 0.2 | 0.2 | % |
| | MAX | 1.0 | 0.2 | 0.8 | 0.8 | |
| Short Term Stability (3) | TYP | < 0.05 | | | | %/24Hrs |
| Long Term Stability | TYP | < 0.1 | | | | %/kHrs |
| Input Ripple Rejection (4) | TYP | > 40 | | | | dB |
| Noise, Peak - Peak (2) | TYP | 60 | | | | mV_{PP} |
| RMS Noise | TYP | 6 | | | | mV_{rms} |
| Temperature Coefficient | TYP | 50 | | | | ppm/°C |
| | MAX | 150 | | | | |
| Short Circuit Protection from +OUT to -OUT | | Continuous, Current Limit Protection | | | | |

NOTES

- (1) All parameters measured at $T_c = 25^\circ\text{C}$, nominal input voltage and full rated load unless otherwise noted. Refer to the Technical Reference Section for the definition of terms, measurement circuits and other information.
- (2) Noise is measured per Technical Reference Section. Measurement bandwidth is 0-20 MHz for peak-peak measurements, 10 kHz to 1 MHz for RMS measurements. Output noise is measured with a $0.01\mu\text{F}$ / 100V ceramic capacitor in parallel with a $1\mu\text{F}$ / 35V Tantalum capacitor, 1 inch from the output pins to simulate standard PCB decoupling capacitance.
- (3) Short term stability is specified after a 30 minute warmup at full load, constant line and recording the drift over a 24 hour period.
- (4) The input ripple rejection is specified for DC to 120 Hz ripple with a modulation amplitude of 1% of V_{in} .

DFC10 SERIES APPLICATION NOTES:

External Capacitance Requirements

No external capacitance is required for operation of the DFC10 Series. If a capacitive input source is farther than 1" from the converter, an additional capacitor may be required at the input pins for proper operation. This input capacitor should have an ESR

greater than 0.25 ohms. Input capacitors with an ESR less than 0.25 ohms may cause peaking of the input filter and actually degrade circuit performance.


External output capacitance is not required for operation, however it is recommended that $1\mu\text{F}$ to $10\mu\text{F}$ of tantalum and 0.001 to $0.1\mu\text{F}$ ceramic capacitance be selected for reduced system noise. Additional output capacitance may be added for increased filtering, but should not exceed $400\mu\text{F}$.

Negative Outputs

A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting -OUT as the negative output.


DFC10 SERIES – SINGLE OUTPUT

DFC10 SERIES BLOCK DIAGRAM

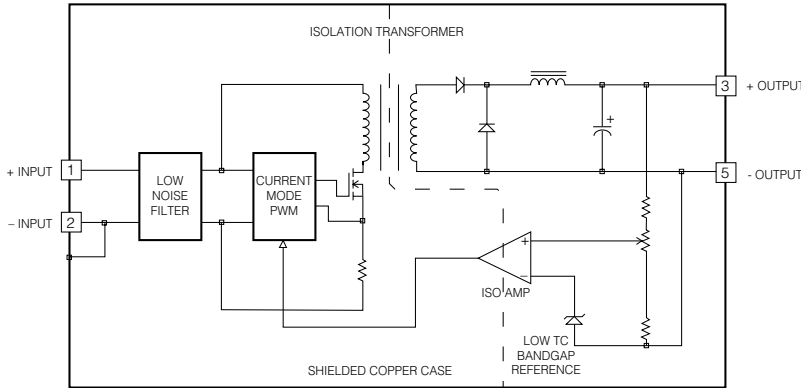


Typical Performance: (Tc=25°C, Vin=Nom VDC, Rated Load)

OUTPUT POWER DERATING

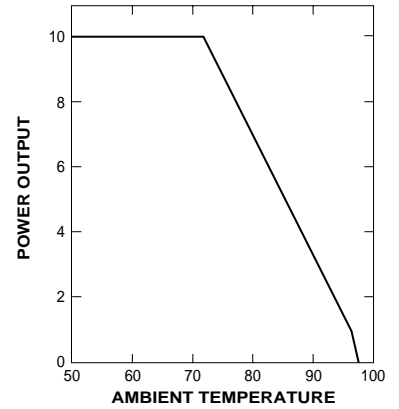


Data for 12 Volt Input Models


12 VOLT INPUT CURRENT Vs. LINE INPUT VOLTAGE

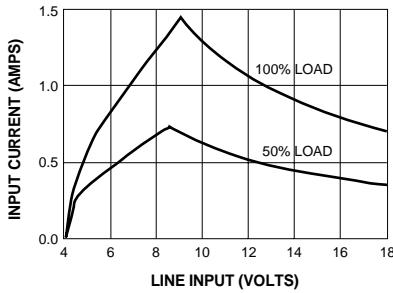

12 VOLT EFFICIENCY Vs. LOAD

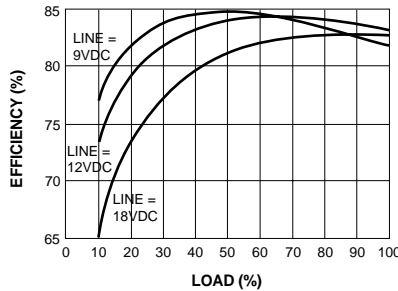


12 VOLT EFFICIENCY Vs. LINE INPUT VOLTAGE

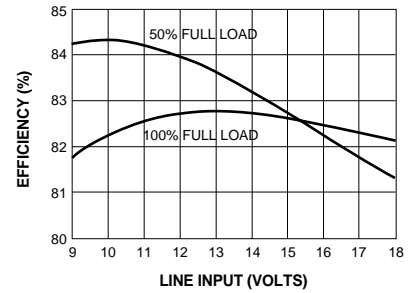


Data for 24 Volt Input Models


24 VOLT INPUT CURRENT Vs. LINE INPUT VOLTAGE

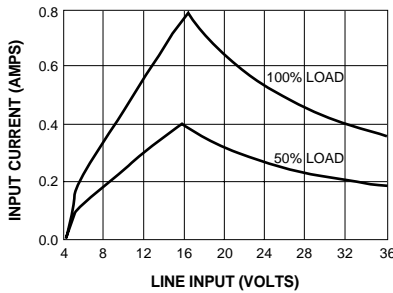

24 VOLT EFFICIENCY Vs. LOAD

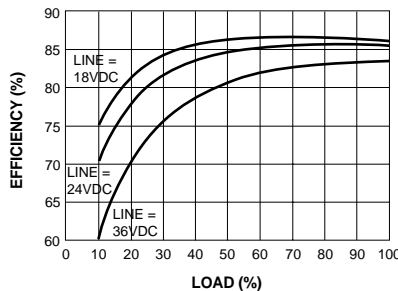


24 VOLT EFFICIENCY Vs. LINE INPUT VOLTAGE

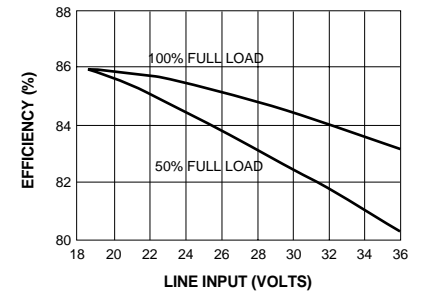


Data for 48 Volt Input Models


48 VOLT INPUT CURRENT Vs. LINE INPUT VOLTAGE

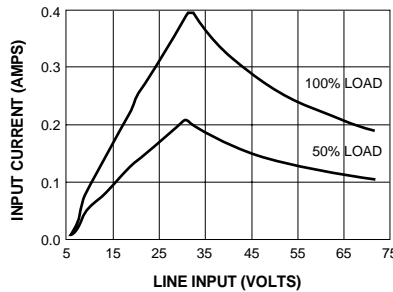

48 VOLT EFFICIENCY Vs. LOAD

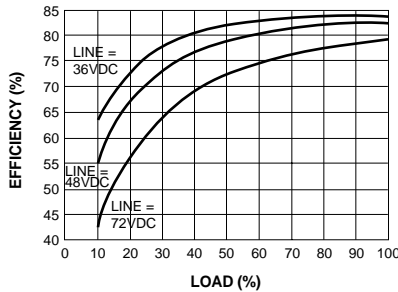

48 VOLT EFFICIENCY Vs. LINE INPUT VOLTAGE

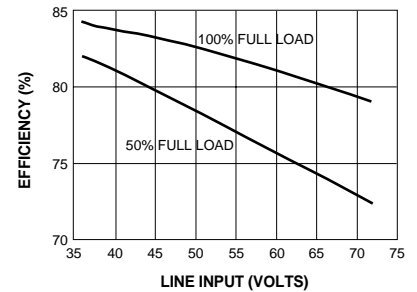

NUCLEAR AND MEDICAL APPLICATIONS Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.

TECHNICAL REVISIONS The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.