


Silicon Switching Diode

- For high-speed switching applications




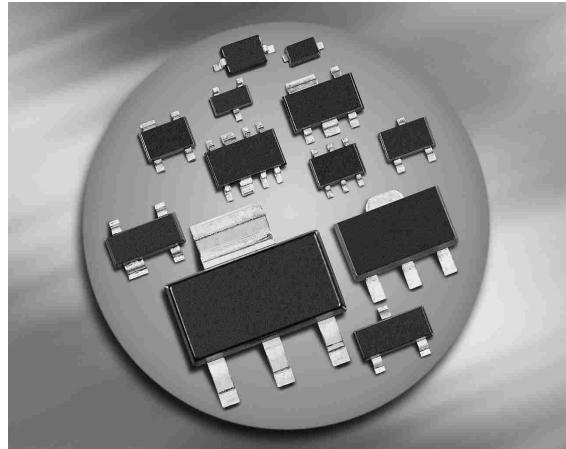


BAS16
BAS16W

BAS16-02L
BAS16-02V
BAS16-02W
BAS16-03W

BAS16S
BAS16U

BAS16-07L4



Type	Package	Configuration	Marking
BAS16	SOT23	single	A6s
BAS16-02L*	TSLP-2-1	single, leadless	A6
BAS16-02V	SC79	single	6
BAS16-02W	SCD80	single	A6
BAS16-03W	SOD323	single	B
BAS16-07L4*	TSLP-4-4	parallel pair, leadless	6A
BAS16S	SOT363	parallel triple	A6s
BAS16U	SC74	parallel triple	A6s
BAS16W	SOT323	single	A6s

* Preliminary Data

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	80	V
Peak reverse voltage	V_{RM}	85	
Forward current BAS16	I_F	250	mA
BAS16-02L, -07L4			
BAS16-02V, -02W			
BAS16-03W			
BAS16S			
BAS16U			
BAS16W			
Non-repetitive peak surge forward current $t = 1 \mu\text{s}$, BAS16/ S/ U/ W/ -03W	I_{FSM}	4.5	A
$t = 1 \mu\text{s}$, BAS16-02L/ -02V/ -02W/ -07L4			
$t = 1 \text{ s}$			
Total power dissipation BAS16, $T_S \leq 54^\circ\text{C}$	P_{tot}	370	mW
BAS16-02L, -07L4, $T_S \leq 130^\circ\text{C}$			
BAS16-02V, -02W, $T_S \leq 120^\circ\text{C}$			
BAS16-03W, $T_S \leq 116^\circ\text{C}$			
BAS16S, $T_S \leq 85^\circ\text{C}$			
BAS16U, $T_S \leq 113^\circ\text{C}$			
BAS16W, $T_S \leq 119^\circ\text{C}$			
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BAS16, BAS16S	R_{thJS}	≤ 260	K/W
BAS16-02L, -07L4		≤ 80	
BAS16-02V, -02W		≤ 120	
BAS16-03W		≤ 135	
BAS16U		≤ 150	
BAS16W		≤ 125	


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Breakdown voltage $I_{(BR)} = 100 \mu\text{A}$	$V_{(\text{BR})}$	85	-	-	V
Reverse current $V_R = 75 \text{ V}$ $V_R = 25 \text{ V}, T_A = 150^\circ\text{C}$ $V_R = 75 \text{ V}, T_A = 150^\circ\text{C}$	I_R	-	-	0.1	μA
-	-	-	-	30	
-	-	-	-	50	
Forward voltage $I_F = 1 \text{ mA}$ $I_F = 10 \text{ mA}$ $I_F = 50 \text{ mA}$ $I_F = 100 \text{ mA}$ $I_F = 150 \text{ mA}$	V_F	-	-	715	mV
-	-	-	-	855	
-	-	-	-	1000	
-	-	-	-	1200	
-	-	-	-	1250	
Forward recovery voltage $I_F = 10 \text{ mA}, t_P = 20 \text{ ns}$	V_{fr}	-	-	1.75	V

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Diode capacitance $V_R = 0 \text{ V}, f = 1 \text{ MHz}$	C_T	-	-	2	pF
Reverse recovery time $I_F = 10 \text{ mA}, I_R = 10 \text{ mA}, \text{ measured at } I_R = 1 \text{ mA}, R_L = 100 \Omega$	t_{rr}	-	-	4	ns

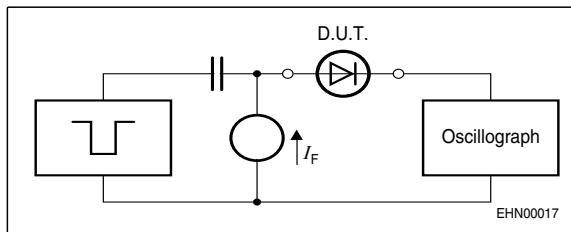
Test circuit for reverse recovery time


Pulse generator: $t_p = 100\text{ns}$, $D = 0.05$, $t_r = 0.6\text{ns}$,
 $R_i = 50\Omega$

Oscilloscope: $R = 50\Omega$, $t_r = 0.35\text{ns}$, $C = 0.05\text{pF}$


Reverse current $I_R = f(T_A)$

V_R = Parameter

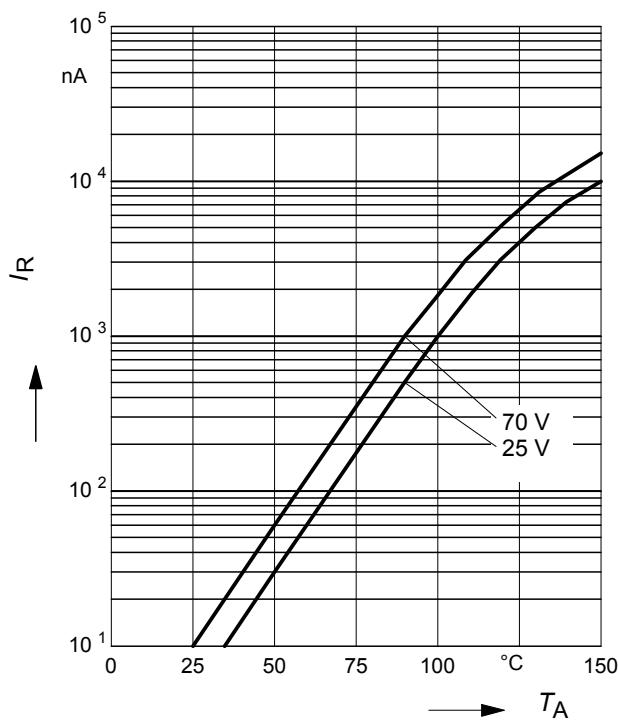


Forward Voltage $V_F = f(T_A)$

I_F = Parameter

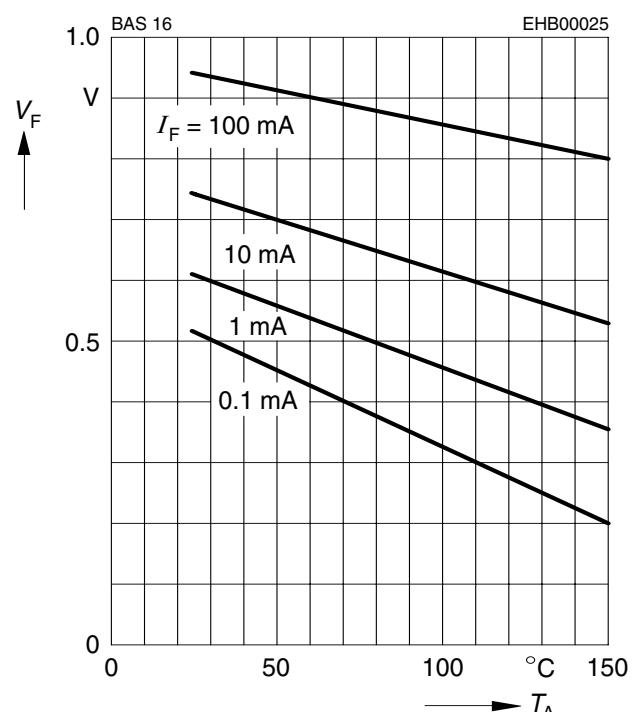


Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

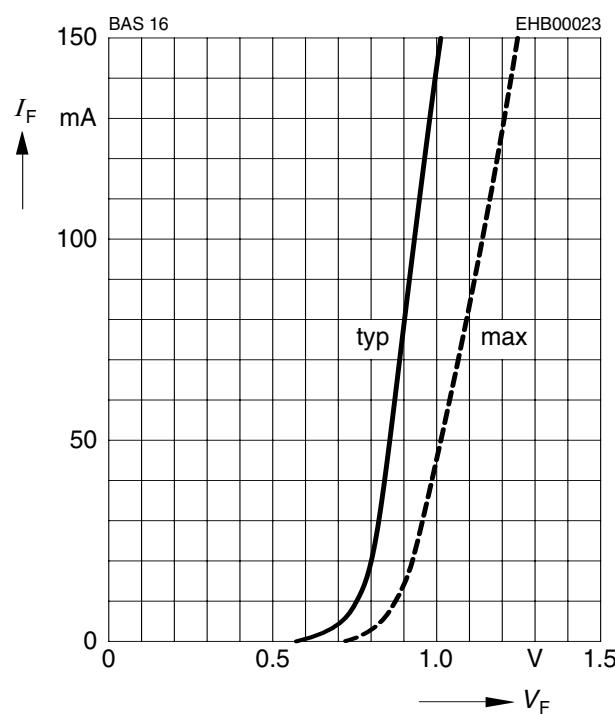


Forward current $I_F = f(T_S)$


BAS16

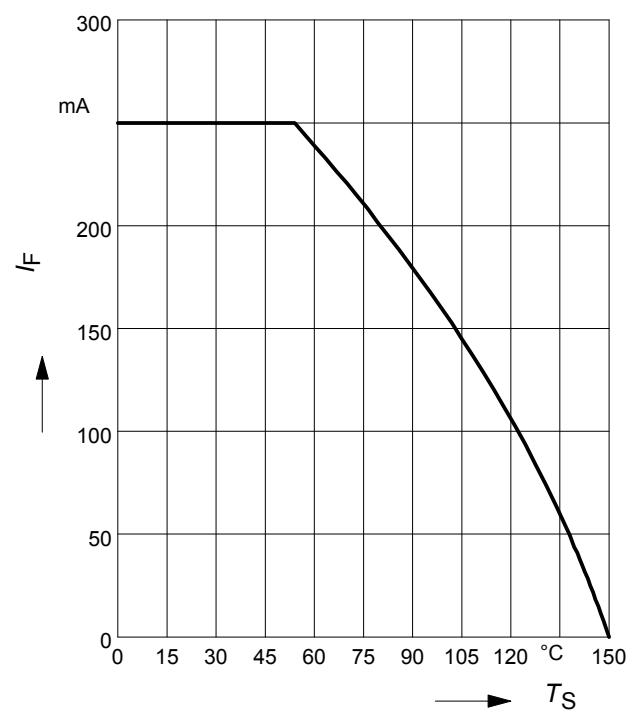


Forward current $I_F = f(T_S)$
BAS16-02L, -07L4

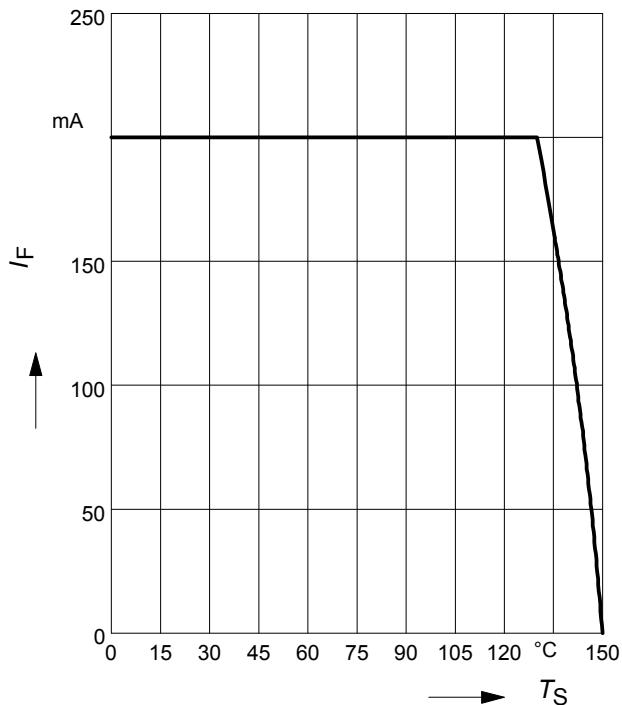


Forward current $I_F = f(T_S)$
BAS16-02V, -02W

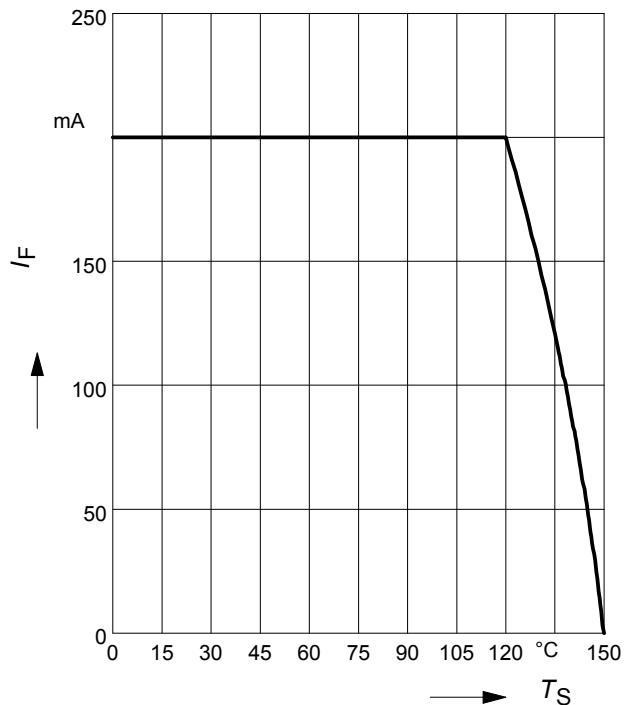


Forward current $I_F = f(T_S)$
BAS16-03W

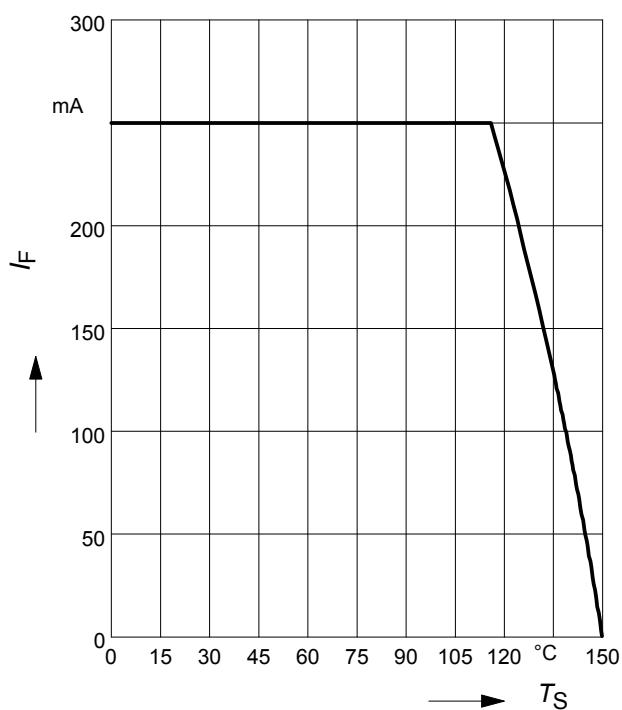


Forward current $I_F = f(T_S)$
BAS16S

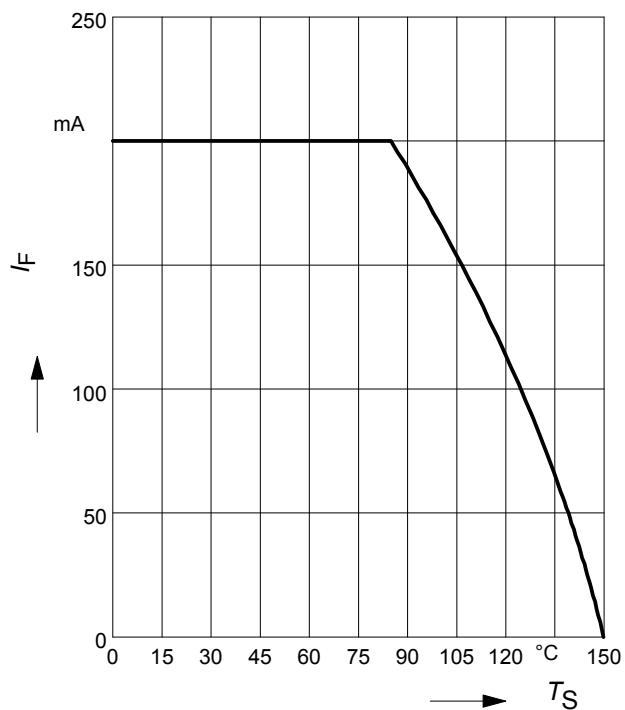


Forward current $I_F = f(T_S)$
BAS16U

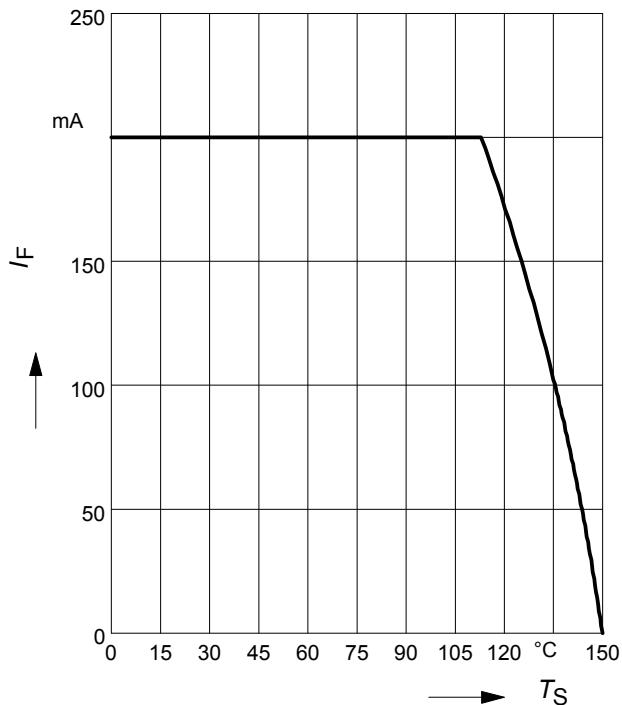


Forward current $I_F = f(T_S)$
BAS16W

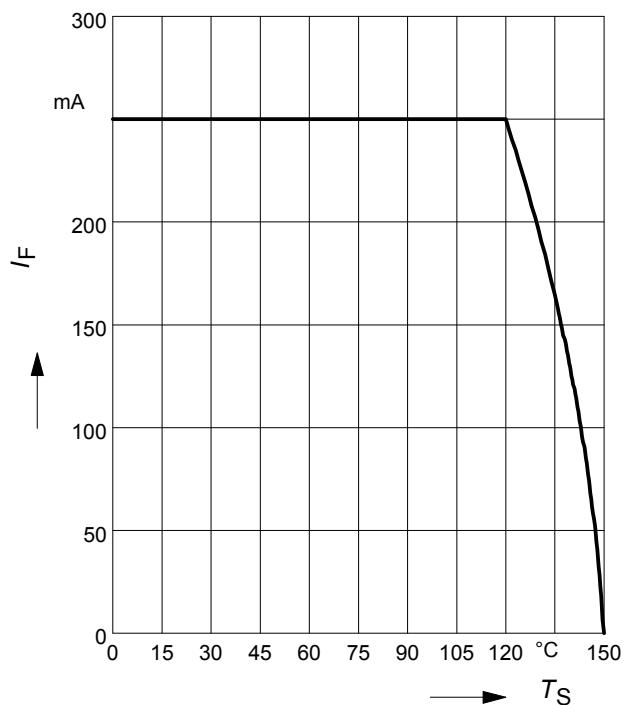

Permissible Puls Load $R_{thJS} = f(t_p)$
BAS16

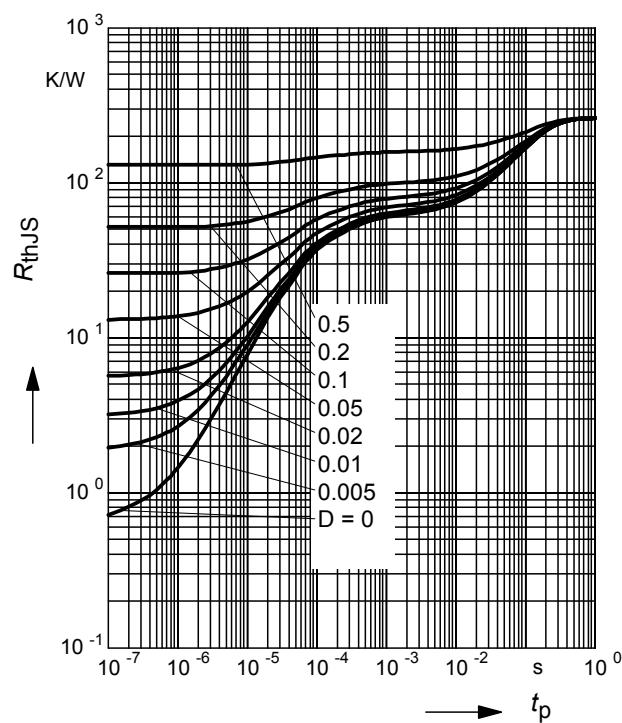


**Permissible Pulse Load
 $I_{Fmax}/I_{FDC} = f(t_p)$**
BAS16

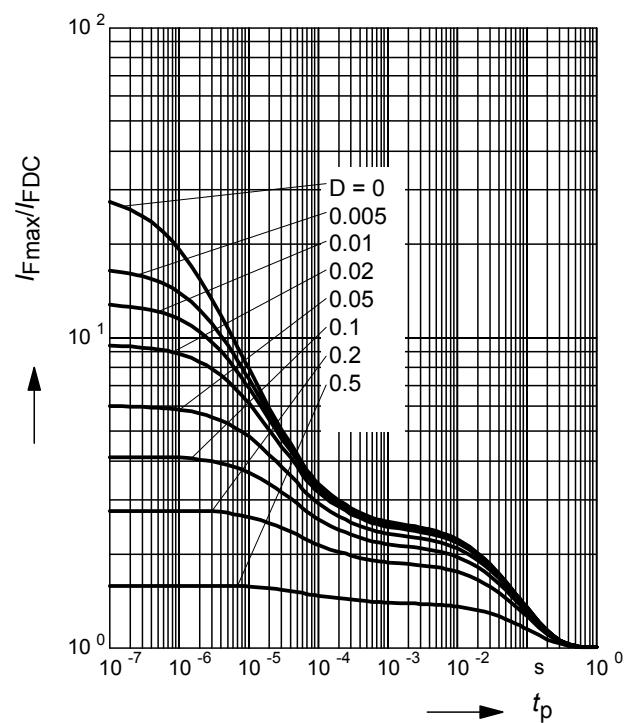


Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAS16-02L, -07L4

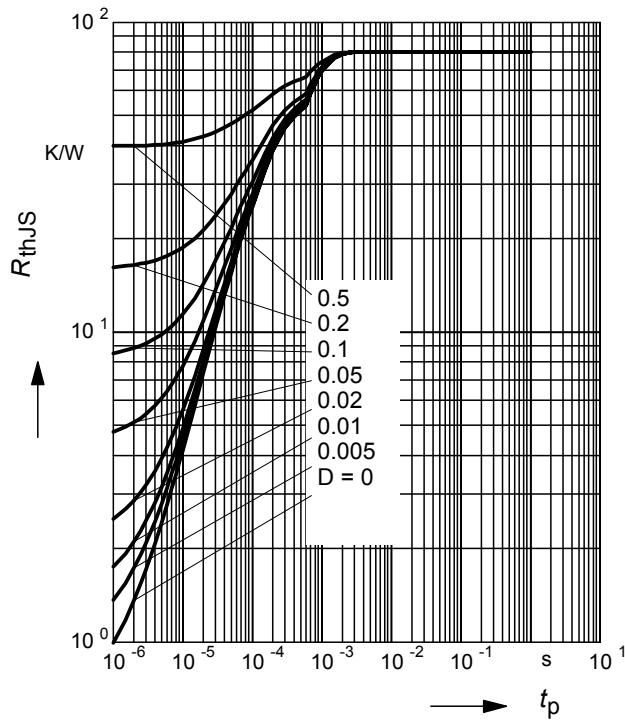

Permissible Pulse Load

$I_{\text{Fmax}} / I_{\text{FDC}} = f(t_p)$

BAS16-02L, -07L4

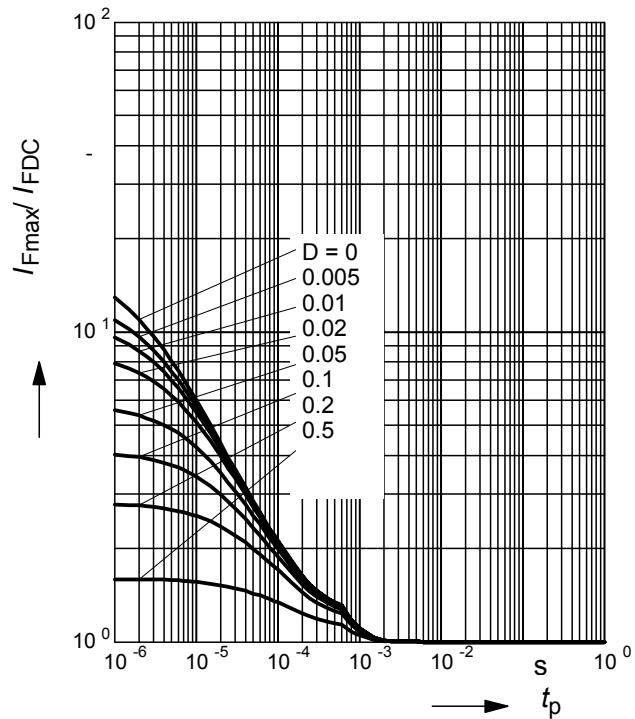

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAS16-02V, -02W

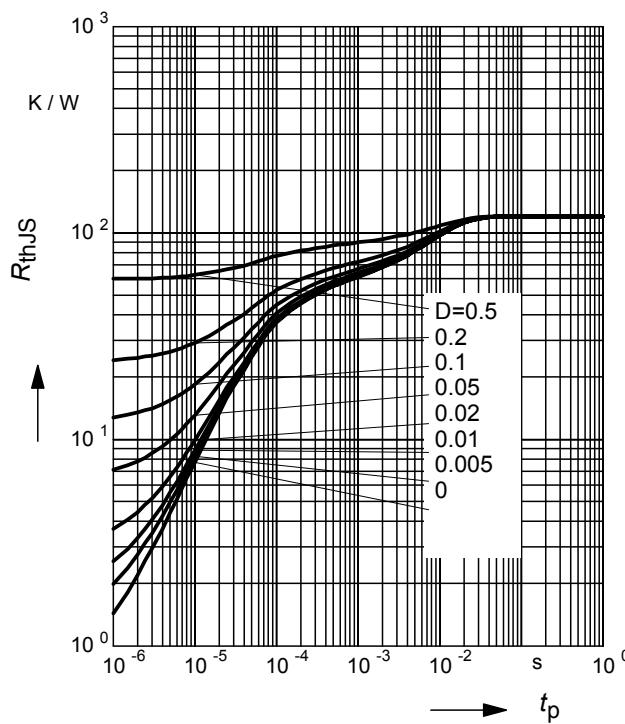
Permissible Pulse Load


$I_{\text{Fmax}} / I_{\text{FDC}} = f(t_p)$

BAS16-02V, -02W

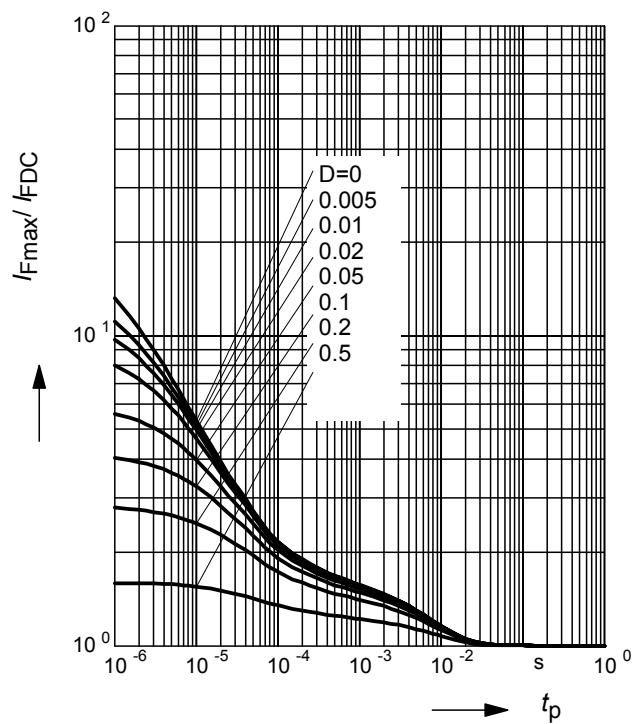


Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAS16-03W

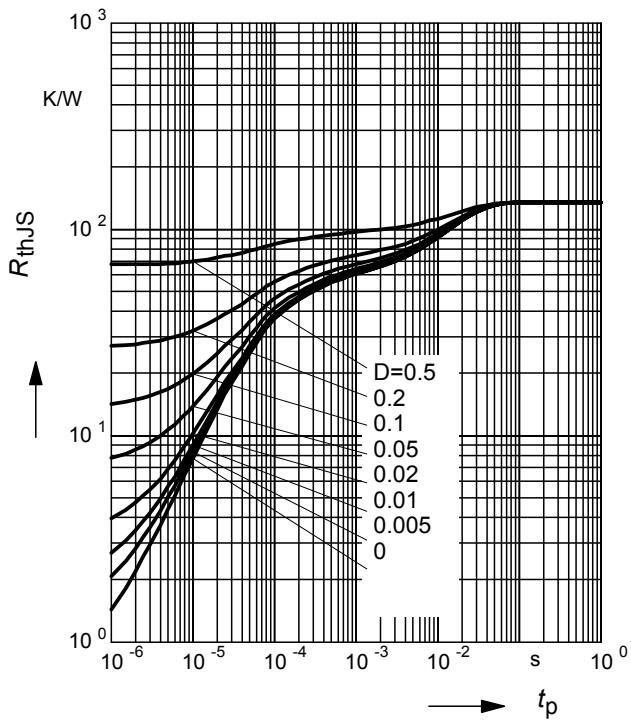

Permissible Pulse Load

$$I_{\text{Fmax}} / I_{\text{FDC}} = f(t_p)$$

BAS16-03W

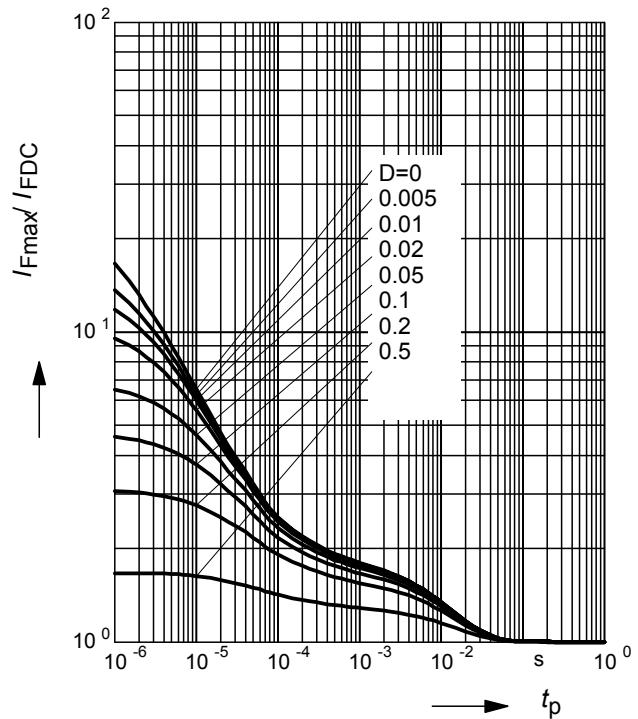

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAS16S

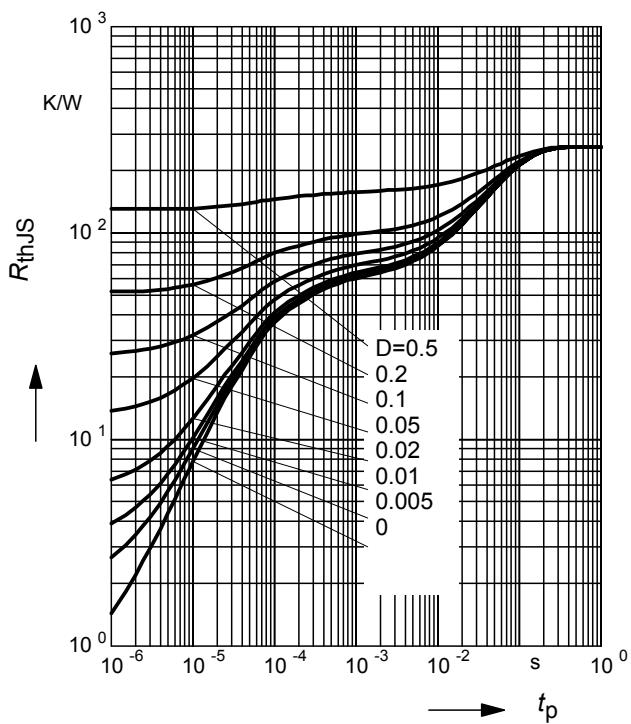
Permissible Pulse Load


$$I_{\text{Fmax}} / I_{\text{FDC}} = f(t_p)$$

BAS16S

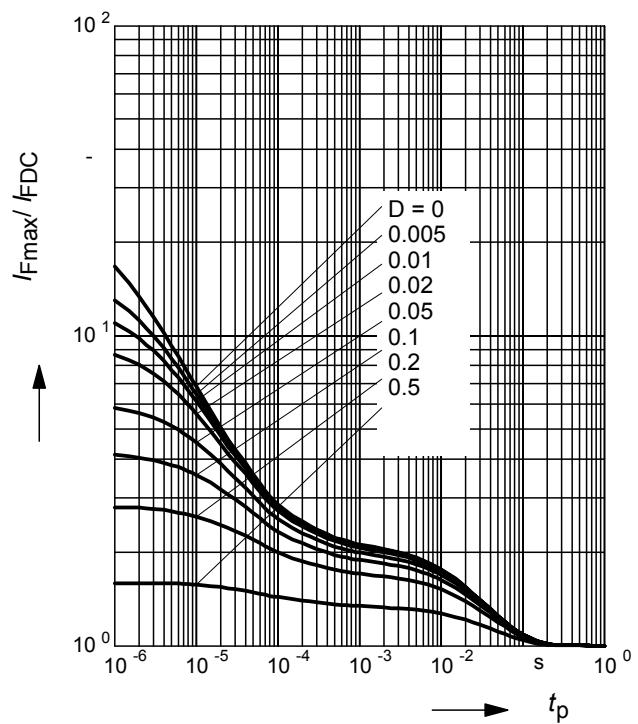


Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAS16U

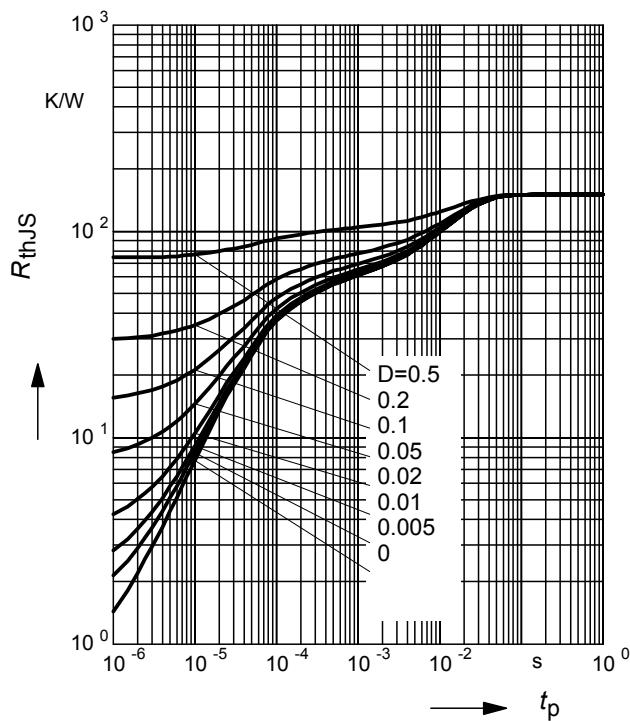

Permissible Pulse Load

$$I_{\text{Fmax}} / I_{\text{FDC}} = f(t_p)$$

BAS16U

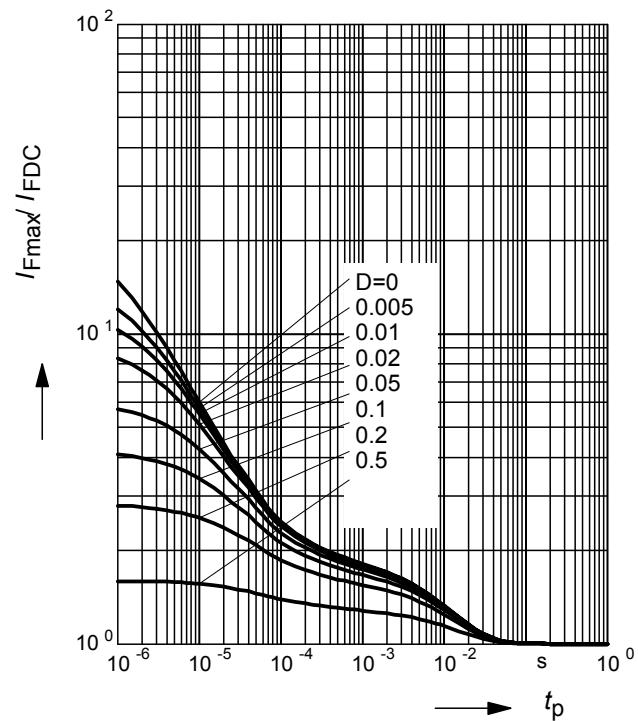

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BAS16W

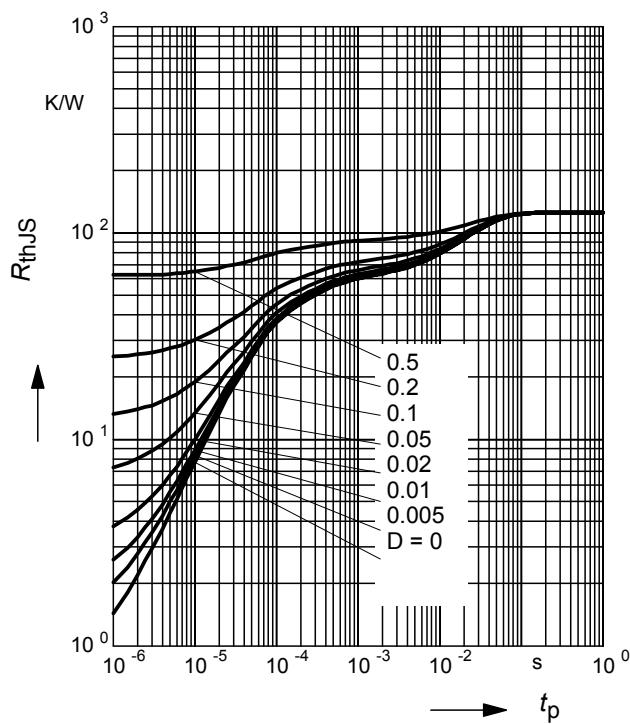
Permissible Pulse Load

$$I_{\text{Fmax}} / I_{\text{FDC}} = f(t_p)$$

BAS16W

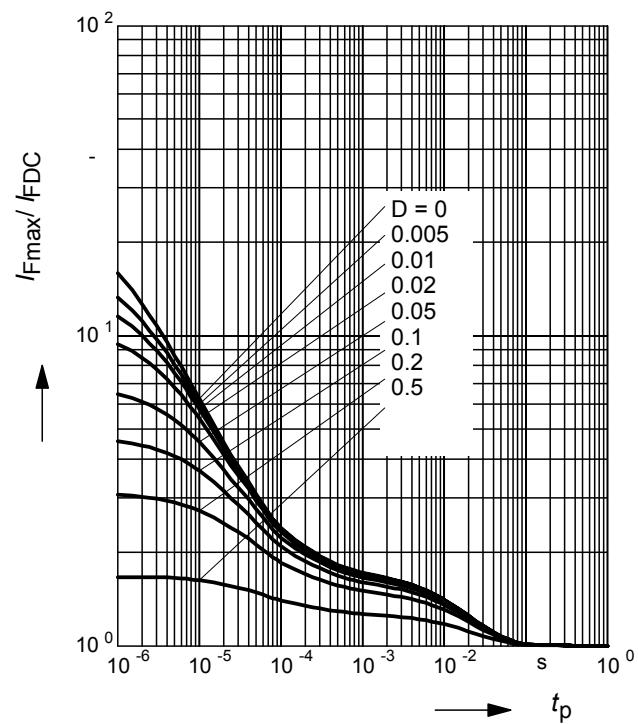

**Published by Infineon Technologies AG,
St.-Martin-Strasse 53,
81669 München**

**© Infineon Technologies AG 2004.
All Rights Reserved.**

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.Infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.