EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD

Technical Data Sheet

1.4 mm Height Subminiature , Axial Flat Top View LED

Features

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- EIA Std. package.
- Mono-color type.
- Pb-free

Descriptions

- The28-21 SMD taping is much smaller than leaded components .Thus enable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications.
- Furthermore by automation assembly machines the accuracy is anticipated.

Applications

- Small indicator for indoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches
- Telecommunication : indicator and backlighting in telephone and fax.

Device Selection Guide

	Lens Color	
Material Emitted Color		
AlGaInP	Super Yellow	Water Clear



28-21UYC/S530-XX/XXX


Everlight Electronics Co., Ltd. Device No. : SZDLE-281-001


Release Date:2008-09-20 00:16:08.0

Expired Period: Forever



Package Outline Dimensions

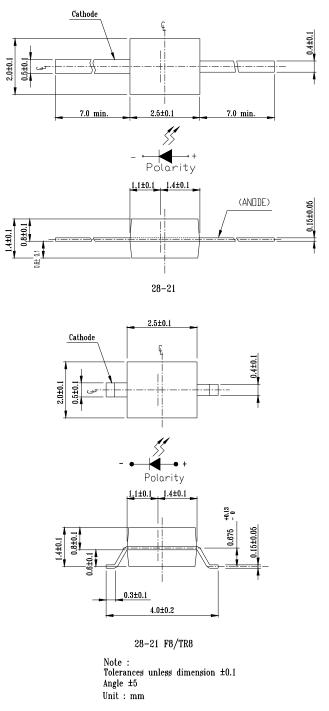



Everlight Electronics Co., Ltd.	http://www.everlight.com	Rev. 1	Page: 2 of 9
Device No. : SZDLE-281-001	repared date:11-25-2004	Prepared by:	Aihua hong
Revision : 1		Release Date:200	8-09-20 00:16:08.0
LifecyclePhase:正式發行		Expired Period: 1	Forever

Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	$I_{\rm F}$	25	mA
Operating Temperature	Topr	-40 ~ +85	
Storage Temperature	Tstg	-40 ~ +100	
Soldering Temperature	Tsol	260 (for 5 second)	
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P _d	60	mW
Peak Forward Current(Duty 1/10	т	60	4
@ 1KHz)	I_{FP}	60	mA

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Chip Rank	MIN.	TYP.	MAX.	Unit	Condition
		A2	12.0	30.0			1
		A3	21.0	33.0			
Iin our Interneiter	т	A4	34.0	45.0		mcd	
Luminous Intensity	I_V	A5	42.0	61.0			
		A6	53.0	77.0		LA	1 20 4
		A7	66.0	91.0	V		I _F =20mA
Viewing Angle	2 1/2)	150		deg	
Peak Wavelength	р			591		nm	
Dominant Wavelength	d			589		nm	
Spectrum Radiation Bandwidth	U,			15		nm	
Forward Voltage	$V_{\rm F}$			2.0	2.4	V	
Reverse Current	I _R				50	μA	V _R =5V

1:Chip Rank

2:Packing Method:

(1) None,F8 : Bulk

(2) TR8 : Taping

Everlight Electronics Co., Ltd.			
Device No. : SZDLE-281-001			

http://www.everlight.com

repared date:11-25-2004

Rev. 1 Page: 3 of 9


Prepared by: Aihua hong

Revision : 1 LifecyclePhase:正式發行 Release Date:2008-09-20 00:16:08.0

Expired Period: Forever



Typical Electro-Optical Characteristics Curves

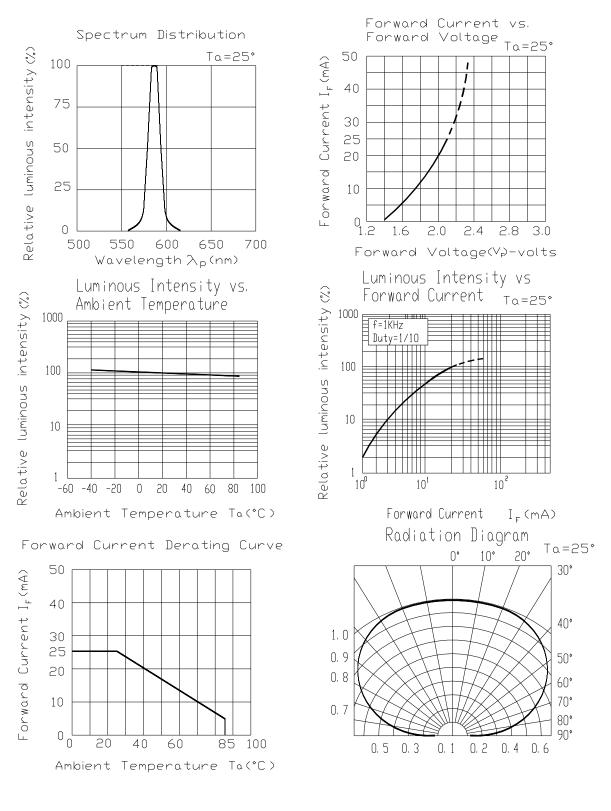

Everlight Electronics Co., Ltd. Device No. : SZDLE-281-001 http://www.everlight.com repared date:11-25-2004 Rev. 1Page: 4 of 9Prepared by:Aihua hong

Revision : 1 LifecyclePhase:正式發行 Release Date:2008-09-20 00:16:08.0 Expired Period: Forever




Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel & Carrier Tape Dimensions

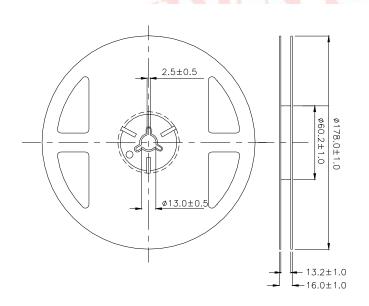


Everlight Electronics Co., Ltd.			
Device No. : SZDLE-281-001			

http://www.everlight.com repared date:11-25-2004 Rev. 1Page: 5 of 9Prepared by:Aihua hong


Revision : 1 LifecyclePhase:正式發行 Release Date:2008-09-20 00:16:08.0 Expired Period: Forever



Loaded quantity per reel 1000 PCS/reel

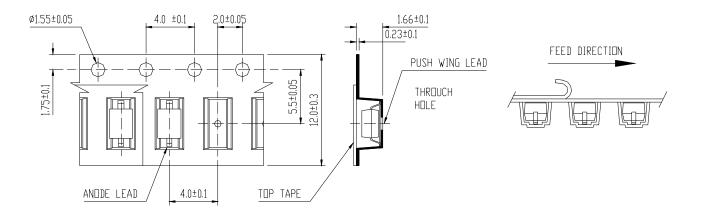

Moisture Resistant Packaging

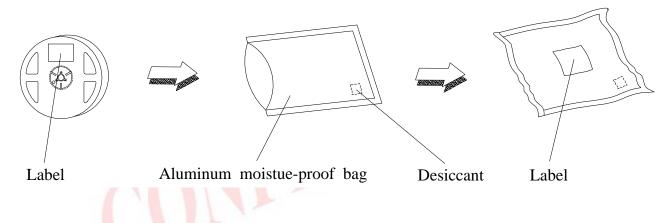

Note: Tolerances Unless Dimension is ±0.1mm, Unit = mm

Everlight Electronics Co., Ltd.	http://www.everlight.com	Rev. 1	Page: 6 of 9
Device No. : SZDLE-281-001	repared date:11-25-2004	Prepared by:	Aihua hong
Revision : 1		Release Date:200	8-09-20 00:16:08.0
LifecyclePhase:正式發行		Expired Period: 1	Forever



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level :

LTPD : 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	H : +100 15 min. 5 min. L : -40 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	H : +100 5 min. 10 sec. L : -10 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85 / <mark>85% RH</mark>	1000 Hrs.	22 Pcs.	0/1
	CUN				

Everlight Electronics Co., Ltd. Device No. : SZDLE-281-001 Rev. 1 Page: 7 of 9

Prepared by: Aihua hong

Revision : 1 LifecyclePhase:正式發行 Release Date:2008-09-20 00:16:08.0 Expired Period: Forever


Precautions For Use

ERLIGH

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30 or less and 90% RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30 or less and 70% RH or less..
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

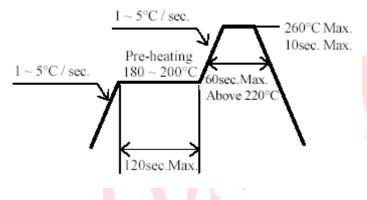

- 3.2 Reflow soldering should not be done more than two times
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd.	http://www.everlight.com	Rev. 1	Page: 8 of 9
Device No. : SZDLE-281-001	repared date:11-25-2004	Prepared by:	Aihua hong
Revision :1 LifecyclePhase:正式發行		Release Date:200 Expired Period: 1	8-09-20 00:16:08.0 Forever



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand

whether the characteristics of the LEDs will or will not be damaged by repairing.

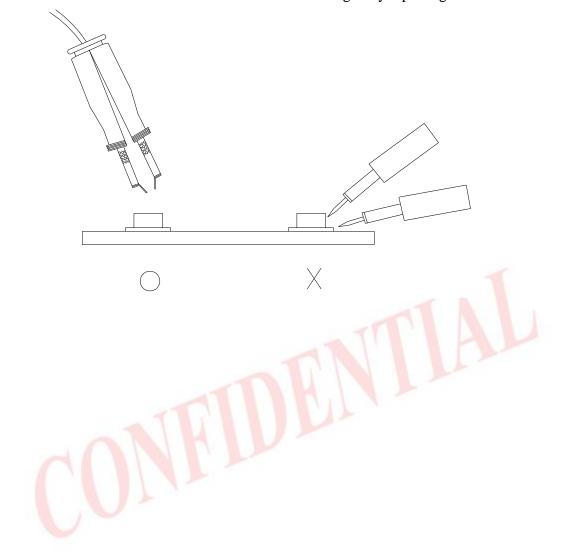

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd. Device No. : SZDLE-281-001

http://www.everlight.com repared date:11-25-2004

Rev. 1 Page: 9 of 9

Prepared by: Aihua hong

Revision :1 LifecyclePhase:正式發行 Release Date:2008-09-20 00:16:08.0

Expired Period: Forever