

The PJ1537 provides 2 output voltage : 3.3V and either 2.5V or 1.8V fixed with 1.0A each output current capability. These devices have been optimized for low voltage where transient response and minimum input voltage critical.

Current limit features protect the outputs against short circuit currents. On-chip thermal limiting provides protection against any combination of overload and ambient temperature that would create excessive junction temperatures.

The PJ1537 series regulators are available in 5-lead TO-263 power packages.

FEATURES


- Hard Disk Drives, CD-ROMs, DVDs
- High efficiency linear regulators
- Post regulators for switching supplies
- ADSL and Cable Modems
- 5V to 3.3V and 2.5V linear regulators
- Motherboard with multiple supplies

APPLICATIONS

- Battery protection
- Load switch
- Power management

BLOCK DIAGRAM


TO-263-5L



Pin
 1. V_{IN}
 2. NC
 3. GND
 4. V₁
 5. V₂

ORDERING INFORMATION

Device	Operating Temperature	Package
PJ1537CM	0°C TO 75°C	TO-263

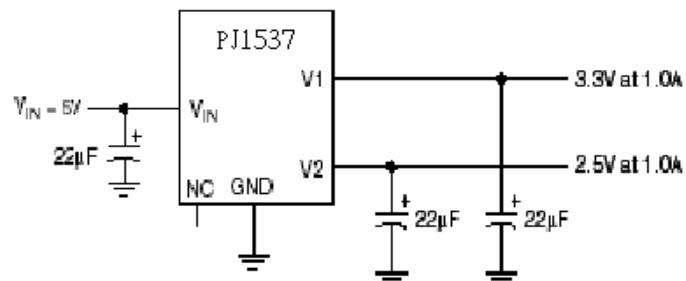

MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Input Voltage	V _{IN}	10	V
Operating Junction Temperature Range	T _J	0 to 150	°C
Storage Temperature Range	T _{str}	-65 to 150	°C
Lead Temperature(Soldering, 10sec)	-	300	°C



ELECTRICAL CHARACTERISTICS(V_{IN}≤7V, T_J=25°C (unless otherwise specified))

The Denotes specifications which apply over the specified operating temperature range of 0°C to 125°C junction temperature.

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltages 1	V _{out1}	10mA≤I _{OUT} ≤1A 4.75V≤V _{IN} ≤7V	-2%	-	+2%	V
Output Voltages 2	V _{out2}	10mA≤I _{OUT} ≤1A 4.75V≤V _{IN} ≤7V	3.2	-	-	V
Time to Output Voltages Valid	-	From V _{IN} ≥4.75V	-	5	-	msec
Line Regulation 1,2(both Outputs)	RegLine	4.75V≤V _{IN} ≤7V, I _{OUT} =10mA	-	0.005	0.5	%
		4.75V≤V _{IN} ≤7V, I _{OUT} =1mA	-	0.05	0.5	%
Dropout Voltage(3.3 output)	V _{drop}	△V _{OUT} = 1% , I _{OUT} =1A	-	1.1	1.3	V
Current Limit(Both outputs)	I _{lmt}	V _{IN} =5V	1.0	1.5	-	A
Minimum Load Current(Both outputs)	I _{load(min)}	4.75V≤V _{IN} ≤7V	1.0	-	-	mA
Quiescent Current	I _Q	V _{IN} =7V	-	6	15	mA
Ripple Rejection 3(both outputs)	G _{RR2}	F=120Hz, C _{OUT} =22Mf Tantalum, V _{IN} =5V, I _{OUT} =1A	60	-	-	dB
Long-Term Stability	-	T _A =125°C, 1000hrs	-	0.03	1.0	%
Ripple Rejection	G _{RR}	T _A =125°C, 10Hz≤f≤10kHz	60	2.5	-	dB
Thermal Resistance, Junction to case	-	TO-263	-	2	-	°C/W
Thermal Shutdown	-		-	155	-	°C
Thermal Shutdown Hysteresis	-	Junction Temperature	-	10	-	°C

Notes:

- See thermal regulation sperifications for changes in output voltage due to heation effects. Load and line regulation are measured at a constant junction temperature by low duty cycle pulse testing.
- Power dissipation is determined by input/output differential and the output current. Guaranteed maximum output power will not be available over the full input/output voltage range.

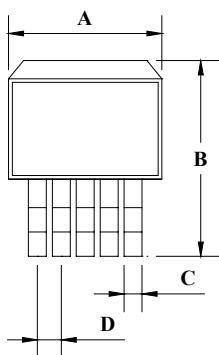

TO-263-5L DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.22	10.26	0.402	0.404
B	14.60	15.87	0.575	0.625
C	0.75	0.77	0.030	0.030
D	1.573	1.827	0.062	0.072
E	4.56	4.57	0.179	0.180
F	1.24	1.27	0.049	0.05
G	2.28	2.79	0.090	0.110
H	0.28	0.32	0.011	0.013
I	8.24	8.28	0.324	0.326
J	1.54	1.80	0.060	0.071