

KR Electronics

General Description


KR 2820-6.7 is a 6.7 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 2.5 MHz and is designed for a source and load impedance of 50 Ω . Other passband frequencies are available. Please consult the factory.

Features


- 6.7 MHz Center Frequency
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 100 nsec/div)

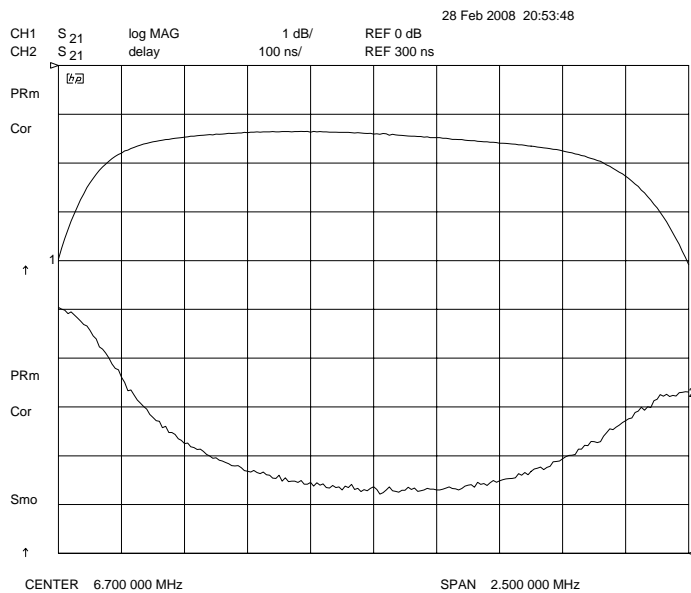

Overall Response
(10 dB/div)

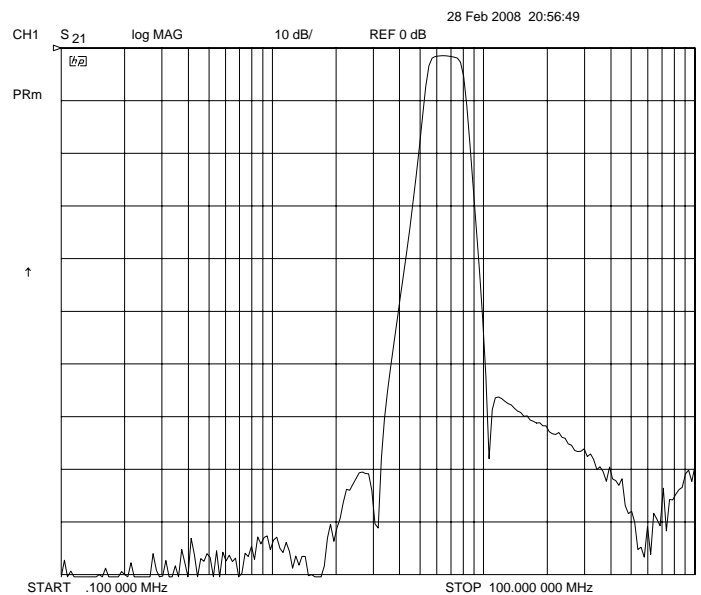

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2820-6.7

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	6.7 MHz
Insertion Loss	< 2.5 dB (1.5 dB typical)
Attenuation at 5.45 MHz	3 ± 1 dB
Attenuation at 7.95 MHz	3 ± 1 dB
Attenuation at 2.95 MHz	> 60 dB
Attenuation at 10.45 MHz	> 60 dB
Source and Load	50 Ω

Physical Dimensions



Dimensions in inches
Epoxy Case

