

IR2410

www.DataSheet4U.com

7-Unit 400mA Darlington Transistor Array


Description

The IR2410 is a 7-circuit driver which is useful when designing circuits for printer calculators with display tubes.

Features


1. High output current, $I_{OUT}=400mA$ (MAX.)
2. High output breakdown voltage
 $BV_{CEO}=45V$ (MAX.)
3. Directly driven by MOS output
4. Internal negative input voltage protective diode
5. Darlington construction
6. 16-pin dual-in-line package

Pin Connections



Top View

Equivalent Circuit

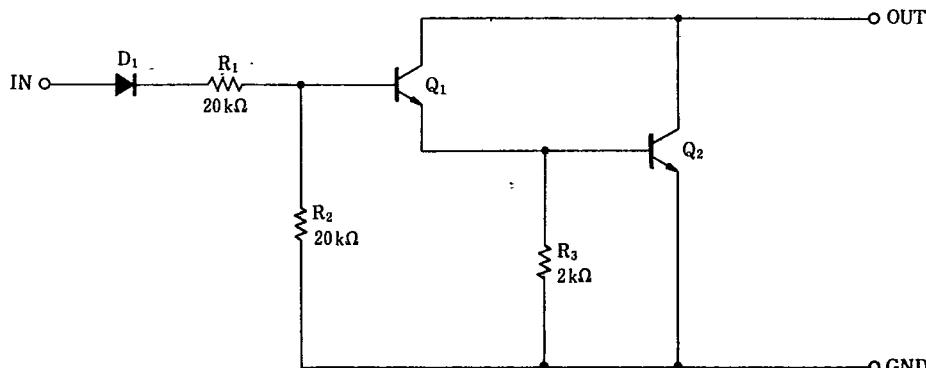

Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Supply voltage	V _{CC}		45	V
Output current *1	I _{OUT}	Each circuit	400	mA
Input voltage	V _{IN}		-40 ~ +45	V
Breakdown voltage between collector-base	BV _{CBO}		45	V
Breakdown voltage between collector-emitter	BV _{CEO}		45	V
Load inductance	L _L	Protection diode used	100	mH
Power dissipation	P _D	T _a ≤ 25°C	650	mW
P _D derating ratio	ΔP _D /°C	T _a > 25°C	6.5	mW/°C
Operating temperature	T _{opr}		-25 ~ +75	°C
Storage temperature	T _{stg}		-55 ~ +125	°C

*1 Duty cycle 10% or less, repetitive frequency 10Hz or more.

Recommended Operating Conditions

Parameter	Symbol	Condition	Rating	Unit
Max. output voltage	V _{OM}		45	V
Operating temperature	T _{opr}		-20 ~ +75	°C
Output current	I _{OUT}	at 10% duty	0 ~ 400	mA
		at 50% duty	0 ~ 150	

(T_a = -25 ~ +75°C)

Electrical Characteristics

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply voltage	V _{CC}				45	V
ON-state input voltage	I _{I ON}	V _{IN} = 17V, I _{OUT} = 0mA		1.2	1.5	mA
ON-state output voltage	V _{O ON1}	V _{IN} = 14V, I _{OUT} = 400mA			2.2	V
	V _{O ON2}	V _{IN} = 14V, I _{OUT} = 200mA			1.4	
OFF-state output current	I _{O OFF}	V _{IN} = 0V, V _{OUT} = 45V			100	μA
Input leakage current	I _L	V _{IN} = -35V	-10			μA
DC current amplitude	h _{FE}	V _{CE} = 2.5V, I _{OUT} = 300mA	1,000			

Electrical Characteristic Curve

Output current—Duty cycle Characteristics

