

SPECIFICATION (TENTATIVE)

Device Name : High-Side Intelligent Power Switch(IPS)

Type Name : F5044H

Spec. No. : MT5F 9488

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the written consent of Fuji Electric Co., Ltd.

Fuji Electric Co., Ltd.
Matsumoto Factory

	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.
DRAFT	Nov-5-78	R. Sugawara		
CHECKED	Nov-5-78	S. Furukawa	<i>[Signature]</i>	MT5F 9488 1/5

- 1.Scope** This specifies Fuji High-Side Intelligent Power Switch F5044H
- 2.Construction** Self-Isolation structure
Output part; N-channel enhancement mode
- 3.Application** For switching
- 4.Outview** SOP-8 (EIAJ SC-87) Outview See to 5/5 Page

5.Absolute maximum ratings (at Tc=25°C. unless otherwise specified.)

Description	Symbol	Characteristics	Unit	Conditions
Supply voltage	V_{CC}	50	V	Pulse 0.25 sec
Supply voltage	V_{CC}	33	V	DC
Continuous Drain current	I_D	3	A	
Input voltage	V_{IN}	$-0.3 \sim V_{CC}+0.3$	V	DC
Status current	I_{ST}	5	mA	
Maximum power dissipation	P_D	1.5	W	*
Operating junction temperature	T_J	150	°C	
Storage temperature range	T_{stg}	$-55 \sim 150$	°C	

* Surface Mounted on 1000mm² PCB(FR-4)

6.Electrical characteristics (at Tc=25°C. unless otherwise specified.)


Description	Symbol	Conditions	Characteristics			Unit
			min.	typ.	max.	
Operating voltage	V_{CC}		6		28	V
Standby current	I_{CC}	$V_{CC}=13V$ $R_L=10\Omega$ $V_{IN}=0V$			3	mA
Input voltage	$V_{IN(H)}$	$V_{CC}=13V$	3.6			V
	$V_{IN(L)}$	$V_{CC}=13V$			1.5	V
Input current	$I_{IN(H)}$	$V_{CC}=13V$ $V_{IN}=5V$			12	μA
On-state resistance	$R_{DS(on)}$	$V_{CC}=13V$ $I_L=1.25A$			0.11	Ω
Output leakage current	I_{CL}	$V_{CC}=13V$			0.5	mA

Description	Symbol	Conditions	Characteristics			Unit
			min.	typ.	max.	
Over-current detection **	I_{OC}	$V_{CC}=13V$	3		6	A
Peak-current under Over-current detection	P_{peak}	$V_{CC}=13V$		10		A
Over-temperature shutdown	T_{JTP}	$V_{CC}=13V$	150		200	°C
Over-voltage shutdown	V_{OV}		26		33	V
Turn-on Time	t_{on}	$V_{CC}=13V$			100	μs
Turn-off Time	t_{off}	$R_L=10\Omega$			40	μs
Status voltage	V_{SRL}	$V_{CC}=13V$ $R_L=10\Omega$ $V_{IN}=0V$ $I_{BT}=1mA$			0.4	V
Status leakage current	I_{STLeak}	$V_{CC}=13V$ $R_L=10\Omega$ $V_{IN}=5V$			10	μA
Output-clamp voltage ***	V_{OLamp}	$V_{CC}=13V$ $I_L=1.0A$ $V_{IN}=0V$ $L=10mH$	$-(50-V_{CC})$		$-(60-V_{CC})$	V
Diode forward on-voltage	V_{SD}	$V_{IN}=0V$ $I_{SD}=-6A$			1.5	V
Open-load detection	R_{LOPEN}	$V_{CC}=13V$ $V_{IN}=0V$	5		30	kΩ

** At Over-current detection, the device moved switching mode.

*** <Output-clamp voltage : V_{OLamp} >

$$50V \leq V_{CC} + V_{OLamp} \leq 60V$$

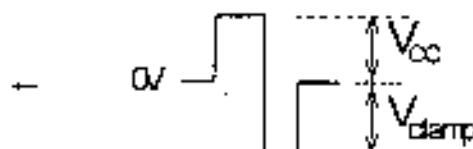

7. Thermal resistance


Description	Symbol	Conditions	Characteristics			Unit
			min.	typ.	max.	
Thermal Resistance	$R_{th(j-c)}$	Junction - case			4.17	°C/W
	$R_{th(j-a)}$	Junction - ambient ****			83.0	°C/W

**** Surface Mounted on 1000mm² PCB (FR-4)

8. Truth Table

	Input voltage	Status voltage	Output voltage	Remarks
Normal operation	L H Open	L H L	L H L	
Open load	L	H	H	Auto-restart
Over current	L H	L L	L L	swtting mode Auto-restart
Over Temperature	L H	L L	L L	Auto-restart
Over Voltage	L H	L H	L L	Auto-restart


9. Timing Chart

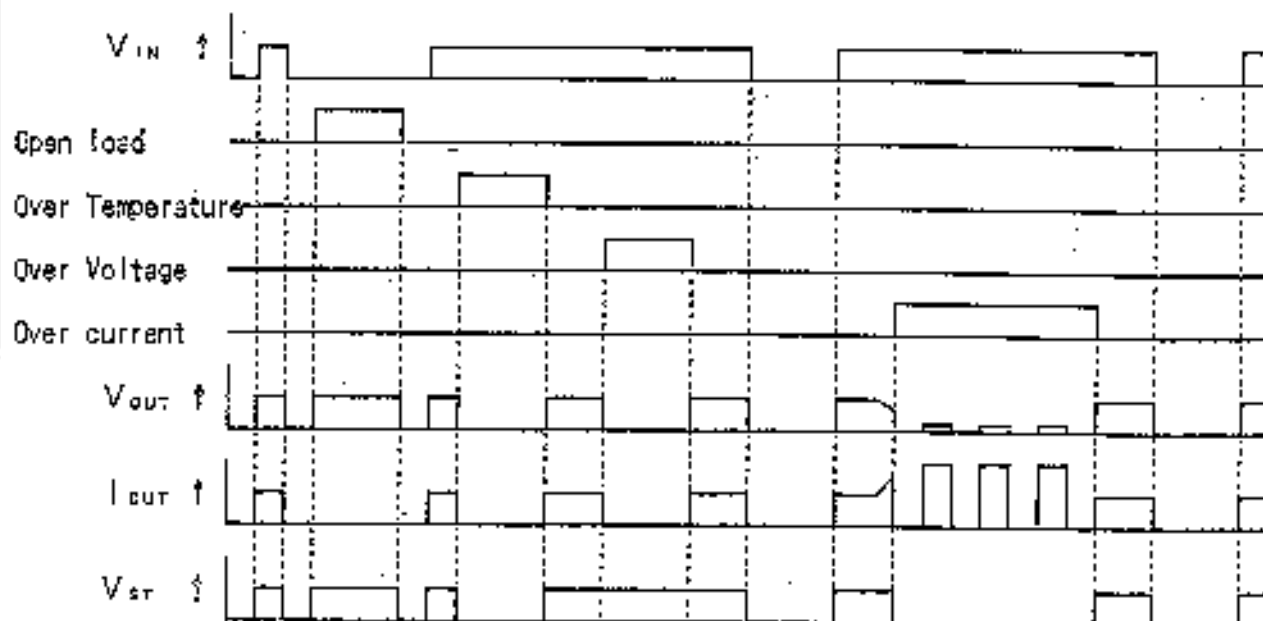


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way, whereever for the use of any part, part or used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

This manual and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party without the written consent of Fuji Electric Co., Ltd.

10. Block diagram

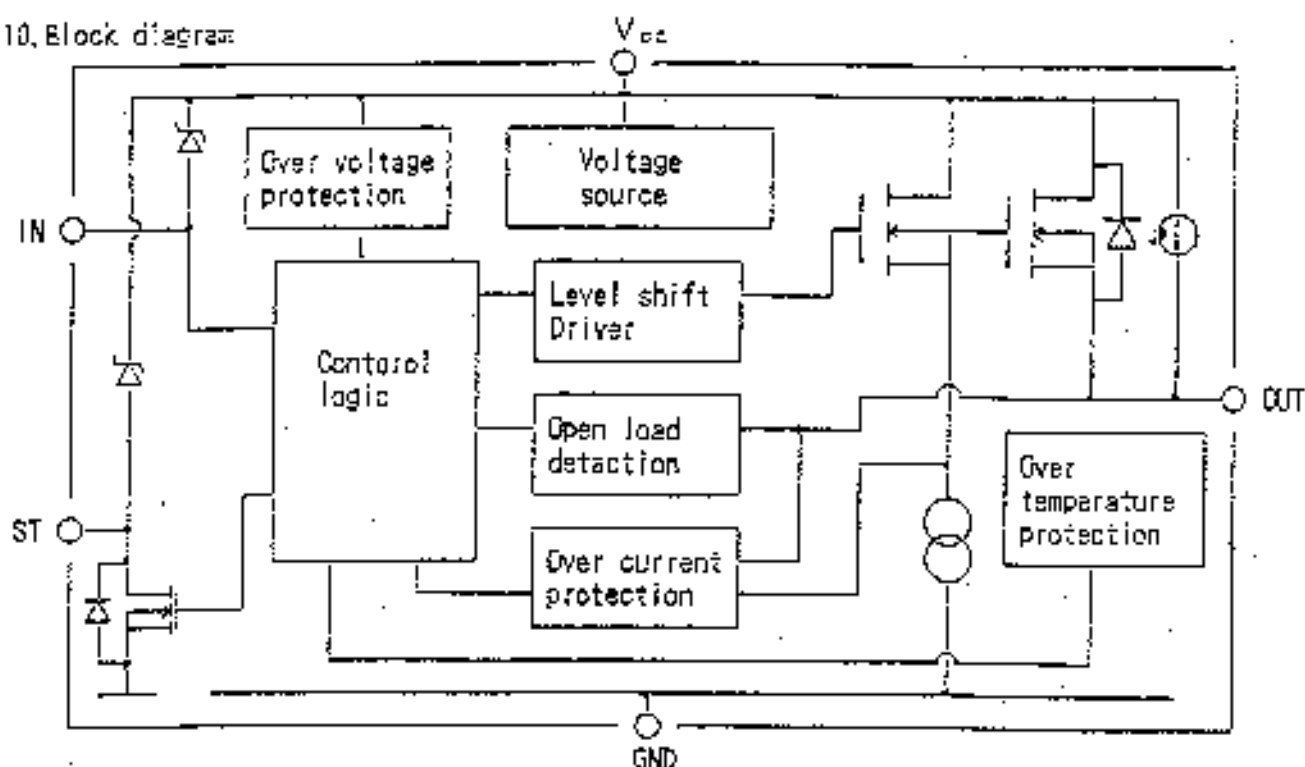

11. Out View

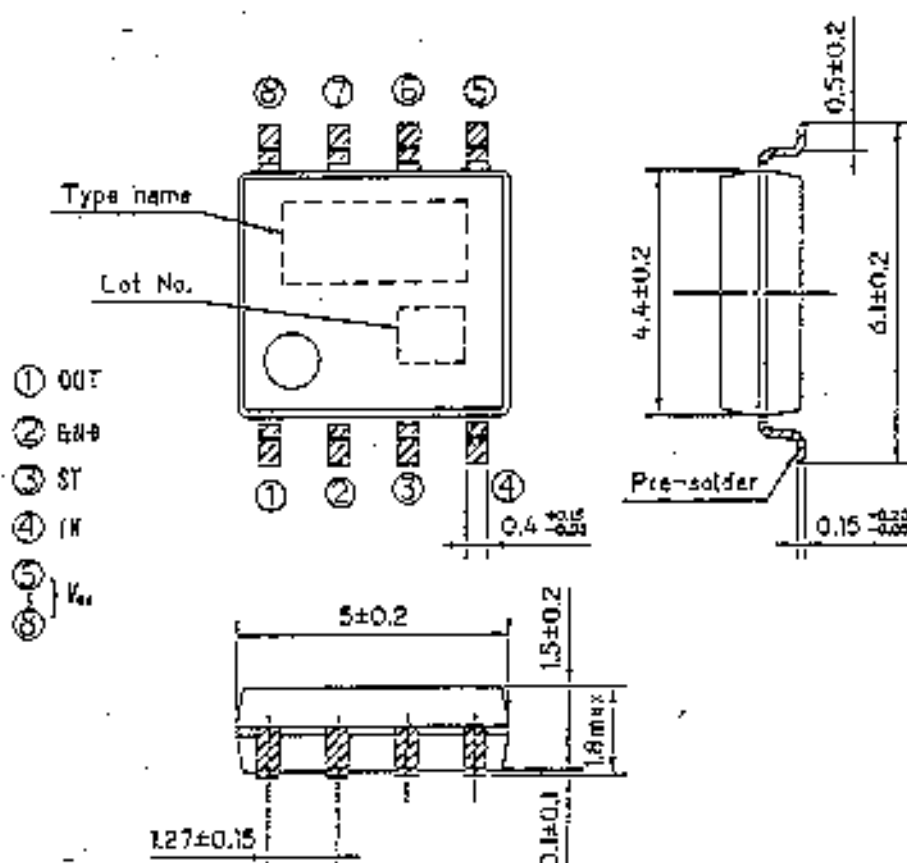

Fuji Electric Co., Ltd.

DWG. NO.

MT5F 9488

5/5

F04-004-03